


BROCAS MANGO CILÍNDRICO DIN 338

CORTA

- **Ejecución:** HSS, tipo N, DIN 338.
- **Perfil** rectificado, corte a derecha.
- **Aplicación:** uso general.

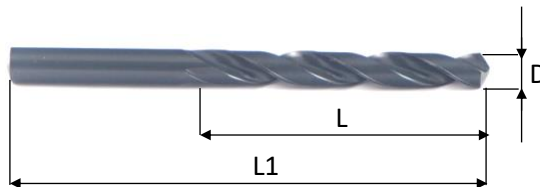

122001

Unid:mm

HSS

DIN
338Tol D
h8

CÓDIGO	D	L	L1	CÓDIGO	D	L	L1
0030	0,30	3	19	0205	2,05	24	49
0035	0,35	4	19	0210	2,10	24	49
0040	0,40	5	20	0215	2,15	27	53
0045	0,45	5	20	0220	2,20	27	53
0050	0,50	6	22	0225	2,25	27	53
0055	0,55	7	24	0230	2,30	27	53
0060	0,60	7	24	0235	2,35	27	53
0065	0,65	8	26	0240	2,40	30	57
0070	0,70	9	28	0245	2,45	30	57
0075	0,75	9	28	0250	2,50	30	57
0080	0,80	10	30	0255	2,55	30	57
0085	0,85	10	30	0260	2,60	30	57
0090	0,90	11	32	0265	2,65	30	57
0095	0,95	11	32	0270	2,70	33	61
0100	1,00	12	34	0275	2,75	33	61
0105	1,05	12	34	0280	2,80	33	61
0110	1,10	14	36	0285	2,85	33	61
0115	1,15	14	36	0290	2,90	33	61
0120	1,20	16	38	0295	2,95	33	61
0125	1,25	16	38	0300	3,00	33	61
0130	1,30	16	38	0305	3,05	36	65
0135	1,35	18	40	0310	3,10	36	65
0140	1,40	18	40	0315	3,15	36	65
0145	1,45	18	40	0320	3,20	36	65
0150	1,50	18	40	0325	3,25	36	65
0155	1,55	20	43	0330	3,30	36	65
0160	1,60	20	43	0335	3,35	36	65
0165	1,65	20	43	0340	3,40	39	70
0170	1,70	20	43	0345	3,45	39	70
0175	1,75	22	46	0350	3,50	39	70
0180	1,80	22	46	0355	3,55	39	70
0185	1,85	22	46	0360	3,60	39	70
0190	1,90	22	46	0365	3,65	39	70
0195	1,95	24	49	0370	3,70	39	70
0200	2,00	24	49	0375	3,75	39	70

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325 ○	HRc30~45	HRc 45 ~55	HRc 55~	○	○					


◎ : Excelente

○ : Bueno

BROCAS MANGO CILÍNDRICO DIN 338

CORTA

- **Ejecución:** HSS, tipo N, DIN 338.
- **Perfil** rectificado, corte a derecha.
- **Aplicación:** uso general.

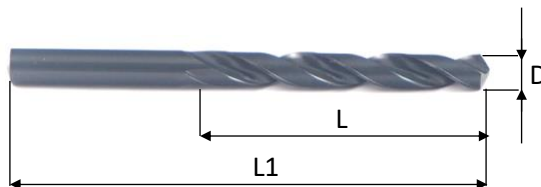

122001

Unid:mm

HSS

DIN
338

118°



30°

Tol D
h8

CÓDIGO	D	L	L1
0380	3,80	43	75
0385	3,85	43	75
0390	3,90	43	75
0395	3,95	43	75
0400	4,00	43	75
0405	4,05	43	75
0410	4,10	43	75
0415	4,15	43	75
0420	4,20	43	75
0425	4,25	43	75
0430	4,30	47	80
0435	4,35	47	80
0440	4,40	47	80
0445	4,45	47	80
0450	4,50	47	80
0455	4,55	47	80
0460	4,60	47	80
0465	4,65	47	80
0470	4,70	47	80
0475	4,75	47	80
0480	4,80	52	86
0485	4,85	52	86
0490	4,90	52	86
0495	4,95	52	86
0500	5,00	52	86
0505	5,05	52	86
0510	5,10	52	86
0515	5,15	52	86
0520	5,20	52	86
0525	5,25	52	86
0530	5,30	52	86
0535	5,35	57	93
0540	5,40	57	93
0545	5,45	57	93
0550	5,50	57	93

CÓDIGO	D	L	L1
0555	5,55	57	93
0560	5,60	57	93
0565	5,65	57	93
0570	5,70	57	93
0575	5,75	57	93
0580	5,80	57	93
0585	5,85	57	93
0590	5,90	57	93
0595	5,95	57	93
0600	6,00	57	93
0605	6,05	63	101
0610	6,10	63	101
0615	6,15	63	101
0620	6,20	63	101
0625	6,25	63	101
0630	6,30	63	101
0635	6,35	63	101
0640	6,40	63	101
0645	6,45	63	101
0650	6,50	63	101
0655	6,55	63	101
0660	6,60	63	101
0665	6,65	63	101
0670	6,70	63	101
0675	6,75	69	109
0680	6,80	69	109
0685	6,85	69	109
0690	6,90	69	109
0695	6,95	69	109
0700	7,00	69	109
0705	7,05	69	109
0710	7,10	69	109
0715	7,15	69	109
0720	7,20	69	109
0725	7,25	69	109

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325 ○	HRc30~45	HRc 45 ~55	HRc 55~	○	○					


◎ : Excelente

○ : Bueno

BROCAS MANGO CILÍNDRICO DIN 338

CORTA

- **Ejecución:** HSS, tipo N, DIN 338.
- **Perfil** rectificado, corte a derecha.
- **Aplicación:** uso general.

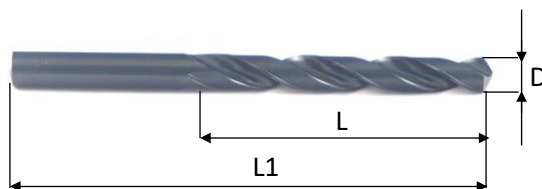

122001

Unid:mm

HSS

DIN
338Tol D
h8

CÓDIGO	D	L	L1	CÓDIGO	D	L	L1
0730	7,30	69	109	0905	9,05	81	125
0735	7,35	69	109	0910	9,10	81	125
0740	7,40	69	109	0915	9,15	81	125
0745	7,45	69	109	0920	9,20	81	125
0750	7,50	69	109	0925	9,25	81	125
0755	7,55	75	117	0930	9,30	81	125
0760	7,60	75	117	0935	9,35	81	125
0765	7,65	75	117	0940	9,40	81	125
0770	7,70	75	117	0945	9,45	81	125
0775	7,75	75	117	0950	9,50	81	125
0780	7,80	75	117	0955	9,55	87	133
0785	7,85	75	117	0960	9,60	87	133
0790	7,90	75	117	0965	9,65	87	133
0795	7,95	75	117	0970	9,70	87	133
0800	8,00	75	117	0975	9,75	87	133
0805	8,05	75	117	0980	9,80	87	133
0810	8,10	75	117	0985	9,85	87	133
0815	8,15	75	117	0990	9,90	87	133
0820	8,20	75	117	0995	9,95	87	133
0825	8,25	75	117	1000	10,00	87	133
0830	8,30	75	117	1010	10,10	87	133
0835	8,35	75	117	1020	10,20	87	133
0840	8,40	75	117	1025	10,25	87	133
0845	8,45	75	117	1030	10,30	87	133
0850	8,50	75	117	1040	10,40	87	133
0855	8,55	81	125	1050	10,50	87	133
0860	8,60	81	125	1060	10,60	87	133
0865	8,65	81	125	1070	10,70	94	142
0870	8,70	81	125	1075	10,75	94	142
0875	8,75	81	125	1080	10,80	94	142
0880	8,80	81	125	1090	10,90	94	142
0885	8,85	81	125	1100	11,00	94	142
0890	8,90	81	125	1110	11,10	94	142
0895	8,95	81	125	1120	11,20	94	142
0900	9,00	81	125	1125	11,25	94	142

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325 ○	HRc30~45	HRc 45 ~55	HRc 55~	○	○					


◎ : Excelente

○ : Bueno

BROCAS MANGO CILÍNDRICO DIN 338

CORTA

- **Ejecución:** HSS, tipo N, DIN 338.
- Perfil rectificado, corte a derecha.
- **Aplicación:** uso general.

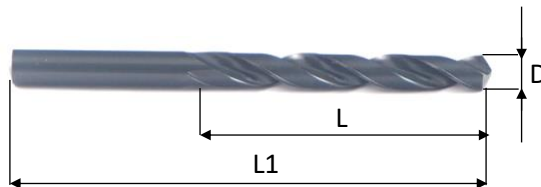

122001

Unid:mm

HSS

DIN
338Tol D
h8

CÓDIGO	D	L	L1	CÓDIGO	D	L	L1
1130	11,30	94	142	1430	14,30	114	169
1140	11,40	94	142	1440	14,40	114	169
1150	11,50	94	142	1450	14,50	114	169
1160	11,60	94	142	1460	14,60	114	169
1170	11,70	94	142	1470	14,70	114	169
1175	11,75	94	142	1475	14,75	114	169
1180	11,80	94	142	1480	14,80	114	169
1190	11,90	101	151	1490	14,90	114	169
1200	12,00	101	151	1500	15,00	114	169
1210	12,10	101	151	1520	15,20	120	178
1220	12,20	101	151	1525	15,25	120	178
1225	12,25	101	151	1550	15,50	120	178
1230	12,30	101	151	1560	15,60	120	178
1240	12,40	101	151	1570	15,70	120	178
1250	12,50	101	151	1575	15,75	120	178
1260	12,60	101	151	1580	15,80	120	178
1270	12,70	101	151	1590	15,90	120	178
1275	12,75	101	151	1600	16,00	120	178
1280	12,80	101	151	1620	16,20	125	184
1290	12,90	101	151	1625	16,25	125	184
1300	13,00	101	151	1650	16,50	125	184
1310	13,10	101	151	1675	16,75	125	184
1320	13,20	101	151	1680	16,80	125	184
1325	13,25	108	160	1700	17,00	125	184
1330	13,30	108	160	1725	17,25	130	191
1340	13,40	108	160	1750	17,50	130	191
1350	13,50	108	160	1775	17,75	130	191
1360	13,60	108	160	1800	18,00	130	191
1370	13,70	108	160	1825	18,25	135	198
1375	13,75	108	160	1850	18,50	135	198
1380	13,80	108	160	1875	18,75	135	198
1390	13,90	108	160	1900	19,00	135	198
1400	14,00	108	160	1925	19,25	140	205
1410	14,10	114	169	1950	19,50	140	205
1420	14,20	114	169	1975	19,75	140	205
1425	14,25	114	169	2000	20,00	140	205

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325 ○	HRC30~45	HRC 45 ~55	HRC 55~	○	○					

◎ : Excelente

○ : Bueno