


BROCAS MANGO CILÍNDRICO DIN 340

LARGA

- **Ejecución:** HSSCo 5%, tipo S, DIN 340.
- Perfil rectificado, corte a derecha.
- Broca especial para perforaciones profundas.
- La espiral de la ranura permite una buena evacuación de la viruta.

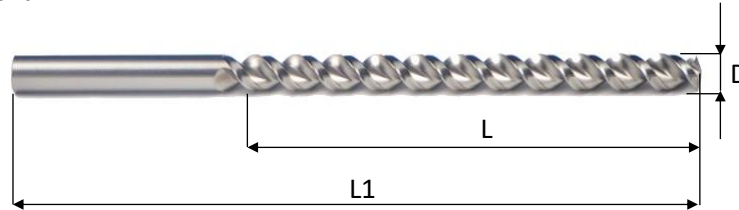

123003

Unid:mm

HSSCo
5%DIN
340Tol D
h8

CÓDIGO	D	L	L1	CÓDIGO	D	L	L1
0200	2,00	56	85	0520	5,20	87	132
0210	2,10	56	85	0525	5,25	87	132
0230	2,30	59	90	0530	5,30	87	132
0250	2,50	62	95	0550	5,50	91	139
0270	2,70	66	100	0560	5,60	91	139
0275	2,75	66	100	0575	5,75	91	139
0300	3,00	66	100	0580	5,80	91	139
0310	3,10	69	106	0590	5,90	91	139
0320	3,20	69	106	0600	6,00	91	139
0325	3,25	69	106	0620	6,20	97	148
0330	3,30	69	106	0650	6,50	97	148
0350	3,50	73	112	0680	6,80	102	156
0360	3,60	73	112	0700	7,00	102	156
0370	3,70	73	112	0720	7,20	102	156
0375	3,75	73	112	0750	7,50	102	156
0390	3,90	78	119	0800	8,00	109	165
0400	4,00	78	119	0820	8,20	109	165
0410	4,10	78	119	0850	8,50	109	165
0420	4,20	78	119	0880	8,80	115	175
0425	4,25	78	119	0900	9,00	115	175
0430	4,30	82	126	0950	9,50	115	175
0440	4,40	82	126	0980	9,80	121	184
0450	4,50	82	126	1000	10,00	121	184
0470	4,70	82	126	1050	10,50	121	184
0475	4,75	82	126	1100	11,00	128	195
0480	4,80	87	132	1150	11,50	128	195
0500	5,00	87	132	1200	12,00	134	205
0510	5,10	87	132	1300	13,00	134	205

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRc30~45	HRc 45 ~55	HRc 55~	○	○	○				

- Consulten plazo de entrega.

⊙ : Excelente

○ : Bueno