


BROCAS MANGO CILÍNDRICO DIN 1869

EXTRA
LARGA

- **Ejecución:** HSSCo 5%, tipo S, DIN 1869.
- Perfil rectificado, corte a derecha.
- Broca especial para perforaciones profundas.
- La espiral de la ranura permite una buena evacuación de viruta.

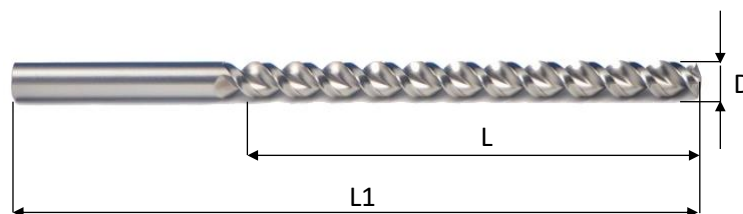

123052

Unid:mm

HSSCo
5%DIN
1869Tol D
h8

CÓDIGO	D	L	L1	CÓDIGO	D	L	L1
0201	2,00	85	125	0502	5,00	170	245
0221	2,25	90	135	0503	5,00	210	315
0251	2,50	95	140	0521	5,25	135	195
0271	2,75	100	150	0522	5,25	170	245
0301	3,00	100	150	0523	5,25	210	315
0302	3,00	130	190	0551	5,50	140	205
0321	3,25	105	155	0552	5,50	180	260
0322	3,25	135	200	0553	5,50	225	330
0351	3,50	115	165	0571	5,75	140	205
0352	3,50	145	210	0572	5,75	180	260
0353	3,50	180	265	0573	5,75	225	330
0371	3,75	115	165	0601	6,00	140	205
0372	3,75	145	210	0602	6,00	180	260
0373	3,75	180	265	0603	6,00	225	330
0401	4,00	120	175	0621	6,25	150	215
0402	4,00	150	220	0622	6,25	190	275
0403	4,00	190	280	0623	6,25	235	350
0421	4,25	120	175	0651	6,50	150	215
0422	4,25	150	220	0652	6,50	190	275
0423	4,25	190	280	0653	6,50	235	350
0451	4,50	125	185	0671	6,75	155	225
0452	4,50	160	235	0672	6,75	200	290
0453	4,50	220	295	0673	6,75	250	370
0471	4,75	125	185	0701	7,00	155	225
0472	4,75	160	235	0702	7,00	200	290
0473	4,75	200	295	0703	7,00	250	370
0501	5,00	135	195	0721	7,25	155	225

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRc30~45	HRc 45 ~55	HRc 55~	○	○	○				

- Consulten plazo de entrega.


⊙ : Excelente

○ : Bueno

BROCAS MANGO CILÍNDRICO DIN 1869

EXTRA
LARGA

- **Ejecución:** HSSCo 5%, tipo S, DIN 1869.
- Perfil rectificado, corte a derecha.
- Broca especial para perforaciones profundas.
- La espiral de la ranura permite una buena evacuación de viruta.

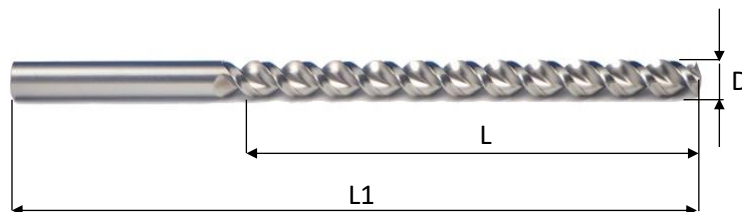

123052

Unid:mm

HSSCo
5%DIN
1869Tol D
h8

CÓDIGO	D	L	L1	CÓDIGO	D	L	L1
0722	7,25	200	290	0952	9,50	220	320
0723	7,25	250	370	0953	9,50	280	410
0751	7,50	155	225	0971	9,75	185	265
0752	7,50	200	290	0972	9,75	235	340
0753	7,50	250	370	0973	9,75	295	430
0771	7,75	165	240	1001	10,00	185	265
0772	7,75	210	305	1002	10,00	235	340
0773	7,75	265	390	1003	10,00	295	430
0801	8,00	165	240	1051	10,50	185	265
0802	8,00	210	305	1052	10,50	235	340
0803	8,00	265	390	1053	10,50	295	430
0821	8,25	165	240	1101	11,00	195	280
0822	8,25	210	305	1102	11,00	250	365
0823	8,25	265	390	1103	11,00	310	455
0851	8,50	165	240	1151	11,50	195	280
0852	8,50	210	305	1152	11,50	250	365
0853	8,50	265	390	1153	11,50	310	455
0871	8,75	165	240	1201	12,00	205	295
0872	8,75	220	320	1202	12,00	260	375
0873	8,75	280	410	1203	12,00	330	480
0901	9,00	175	250	1251	12,50	205	295
0902	9,00	220	320	1252	12,50	260	375
0903	9,00	280	410	1253	12,50	330	480
0921	9,25	175	250	1301	13,00	205	295
0922	9,25	220	320	1302	13,00	260	375
0923	9,25	280	410	1303	13,00	330	480
0951	9,50	175	250				

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRc30~45	HRc 45 ~55	HRc 55~	○	○	○				

- Consulten plazo de entrega.

⊙ : Excelente

○ : Bueno