


BROCAS MANGO CÓNICO DIN 345

CORTA

- **Ejecución:** HSS, tipo N, DIN 345.
- Perfil rectificado, corte a derecha.
- **Aplicación:** uso general.

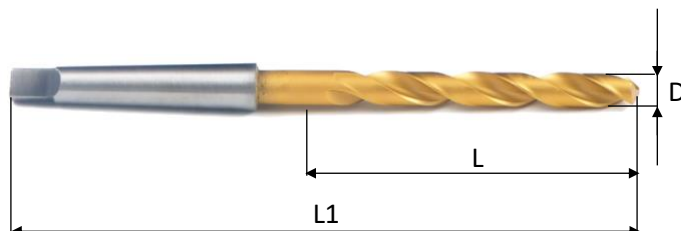

124021

Unid:mm

HSS
TINDIN
345Tol D
h8

CÓDIGO	D	CM	L	L1	CÓDIGO	D	CM	L	L1
0800	8,00	1	75	156	2200	22,00	2	150	248
0850	8,50	1	75	156	2250	22,50	2	155	253
0900	9,00	1	81	162	2300	23,00	2	155	253
0950	9,50	1	81	162	2350	23,50	3	155	276
1000	10,00	1	87	168	2400	24,00	3	160	281
1050	10,50	1	87	168	2450	24,50	3	160	281
1100	11,00	1	94	175	2500	25,00	3	160	281
1150	11,50	1	94	175	2550	25,50	3	165	286
1200	12,00	1	101	182	2600	26,00	3	165	286
1250	12,50	1	101	182	2650	26,50	3	165	286
1300	13,00	1	101	182	2700	27,00	3	170	291
1350	13,50	1	108	189	2750	27,50	3	170	291
1400	14,00	1	108	189	2800	28,00	3	170	291
1450	14,50	2	114	212	2850	28,50	3	175	296
1500	15,00	2	114	212	2900	29,00	3	175	296
1550	15,50	2	120	218	2950	29,50	3	175	296
1600	16,00	2	120	218	3000	30,00	3	175	296
1650	16,50	2	125	223	3100	31,00	3	180	301
1700	17,00	2	125	223	3200	32,00	4	185	334
1750	17,50	2	130	228	3300	33,00	4	185	334
1800	18,00	2	130	228	3400	34,00	4	190	339
1850	18,50	2	135	233	3500	35,00	4	190	339
1900	19,00	2	135	233	3600	36,00	4	195	344
1950	19,50	2	140	238	3700	37,00	4	195	344
2000	20,00	2	140	238	3800	38,00	4	200	349
2050	20,50	2	145	243	3900	39,00	4	200	349
2100	21,00	2	145	243	4000	40,00	4	200	349
2150	21,50	2	150	248					

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRc30~45	HRc 45 ~55	HRc 55~		○	○				

- Consulten plazo de entrega.

⊙ : Excelente

○ : Bueno