


FRESAS DE 2 LABIOS SERIE CORTA

HSSCo

- **Ejecución:** HSSCo 8%, Tipo N, DIN 327, con corte al centro.
- **Aplicación:** en fresado de ranuras para chavetas y contorneado.

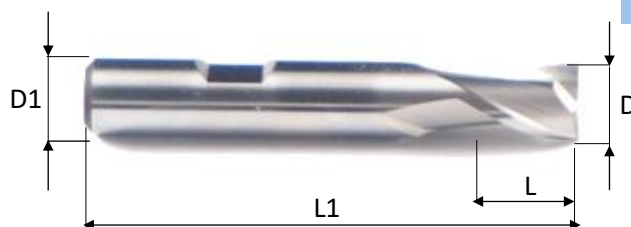

141101

Unid:mm

HSSCo
8%DIN
327

Z2

Tol D
e8Tol D₁
h6

CÓDIGO	D	D1	L	L1
0200	2,00	6	4	48
0250	2,50	6	5	49
0300	3,00	6	5	49
0350	3,50	6	6	50
0400	4,00	6	7	51
0450	4,50	6	7	51
0500	5,00	6	8	52
0550	5,50	6	8	52
0600	6,00	6	8	52
0650	6,50	10	10	60
0700	7,00	10	10	60
0750	7,50	10	10	60
0800	8,00	10	11	61
0850	8,50	10	11	61
0900	9,00	10	11	61
0950	9,50	10	11	61
1000	10,00	10	13	63
1100	11,00	12	13	70
1200	12,00	12	16	73
1300	13,00	12	16	73
1400	14,00	12	16	73
1500	15,00	12	16	73
1600	16,00	16	19	79
1700	17,00	16	19	79
1800	18,00	16	19	79
1900	19,00	16	19	79
2000	20,00	20	22	88
2200	22,00	20	22	88
2400	24,00	25	26	102
2500	25,00	25	26	102
2600	26,00	25	26	102
2800	28,00	25	26	102
3000	30,00	25	26	102
3200	32,00	32	32	112
3600	36,00	32	32	112
4000	40,00	40	38	130

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRc30~45	HRc 45 ~55	HRc 55~		○					

- Recubrimientos TiN y TiAlN, bajo pedido.

⊙ : Excelente

○ : Bueno