


FRESAS DE 4-6 LABIOS SERIE CORTA

HSSCo

- **Ejecución:** HSSCo 8%, tipo N, DIN 844, con corte al centro.
- **Aplicación:** para el fresado de ranuras y contorneados.

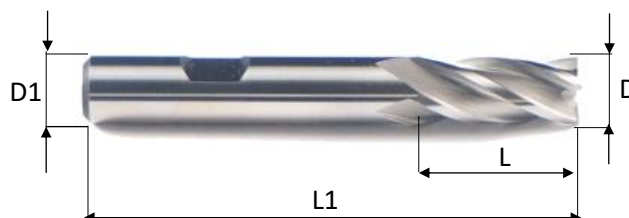

141103

Unid:mm

HSSCo
8%DIN
844

Z4-6

Tol D
k10Tol D₁
h6

CÓDIGO	D	D1	L	L1	Z
0200	2,00	6	7	51	4
0300	3,00	6	8	52	4
0400	4,00	6	11	55	4
0500	5,00	6	13	57	4
0600	6,00	6	13	57	4
0700	7,00	10	16	66	4
0800	8,00	10	19	69	4
0900	9,00	10	19	69	4
1000	10,00	10	22	72	4
1100	11,00	12	22	79	4
1200	12,00	12	26	83	4
1300	13,00	12	26	83	4
1400	14,00	12	26	83	4
1500	15,00	12	26	83	4
1600	16,00	16	32	92	4
1700	17,00	16	32	92	4
1800	18,00	16	32	92	4
1900	19,00	16	32	92	4
2000	20,00	20	38	104	4
2200	22,00	20	38	104	6
2400	24,00	25	45	121	6
2500	25,00	25	45	121	6
2600	26,00	25	45	121	6
2800	28,00	25	45	121	6
3000	30,00	25	45	121	6
3200	32,00	32	53	133	6
3600	36,00	32	53	133	6
4000	40,00	40	63	155	6

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRC30~45	HRC 45 ~55	HRC 55~		○					

- Recubrimientos TiN y TiAlN, bajo pedido.

⊙ : Excelente

○ : Bueno