


FRESAS DE 2 LABIOS SERIE LARGA

HSSCo

- **Ejecución:** HSSCo 8%, tipo N, DIN 327/L, con corte al centro.
- **Aplicación:** en fresado de ranuras para chavetas y contorneado.

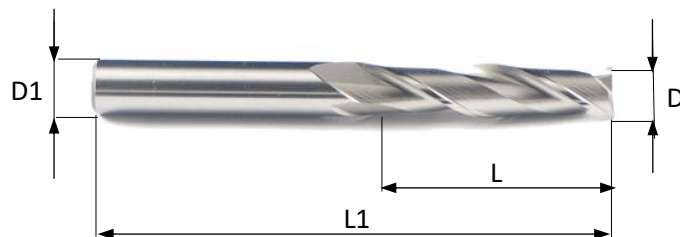

141104

Unid:mm

HSSCo
8%DIN
327/L

Z2

Tol D
e8Tol D₁
h6

CÓDIGO	D	D1	L	L1
0200	2,00	6	7	54
0250	2,50	6	8	56
0300	3,00	6	8	56
0350	3,50	6	10	59
0400	4,00	6	11	63
0450	4,50	6	11	63
0500	5,00	6	13	68
0550	5,50	6	13	68
0600	6,00	6	13	68
0650	6,50	10	16	80
0700	7,00	10	16	80
0800	8,00	10	19	88
0850	8,50	10	19	88
0900	9,00	10	19	88
1000	10,00	10	22	95
1100	11,00	12	22	102
1200	12,00	12	26	110
1400	14,00	12	26	110
1600	16,00	16	32	123
1800	18,00	16	32	123
2000	20,00	20	38	141
2200	22,00	20	38	141
2400	24,00	25	45	166
2500	25,00	25	45	166
2600	26,00	25	45	166
2800	28,00	25	45	166
3000	30,00	25	45	166
3200	32,00	32	53	186
3600	36,00	32	53	186
4000	40,00	32	63	196

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRc30~45	HRc 45 ~55	HRc 55~		○					

- Recubrimientos TIN y TIALN, bajo pedido.

⊙ : Excelente

○ : Bueno