


FRESAS DE 4-6 LABIOS SERIE LARGA

HSSCo

- **Ejecución:** HSSCo 8%, tipo N, DIN 844/L, con corte al centro.
- **Aplicación:** para el fresado de ranuras y contorneados.

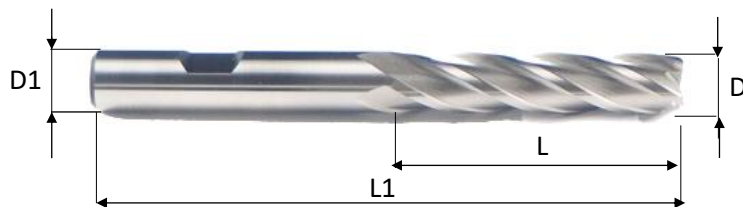


141106

Unid:mm

HSSCo
8%DIN
844/L

Z4-6

Tol D
k10Tol D₁
h6

CÓDIGO	D	D1	L	L1	Z
0200	2,00	6	10	54	4
0250	2,50	6	12	56	4
0300	3,00	6	12	56	4
0350	3,50	6	15	59	4
0400	4,00	6	19	63	4
0450	4,50	6	19	63	4
0500	5,00	6	24	68	4
0550	5,50	6	24	68	4
0600	6,00	6	24	68	4
0700	7,00	10	30	80	4
0800	8,00	10	38	88	4
0900	9,00	10	38	88	4
1000	10,00	10	45	95	4
1100	11,00	12	45	102	4
1200	12,00	12	53	110	4
1400	14,00	12	53	110	4
1600	16,00	16	63	123	4
1800	18,00	16	63	123	4
2000	20,00	20	75	141	4
2200	22,00	20	75	141	6
2500	25,00	25	90	166	6
2800	28,00	25	90	166	6
3000	30,00	25	90	166	6
3200	32,00	32	106	186	6
3600	36,00	32	106	186	6
4000	40,00	40	125	217	6

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRc30~45	HRc 45 ~55	HRc 55~		○					

- Recubrimientos TIN y TIALN, bajo pedido.

⊙ : Excelente

○ : Bueno