


FRESAS DE 2 LABIOS PUNTA SEMIESFÉRICA SERIE CORTA

HSSCo

- **Ejecución:** HSSCo 8%, tipo N, DIN 327, con corte al centro.
- **Aplicación:** para el fresado de ranuras semicirculares, y copiado en la fabricación de moldes.

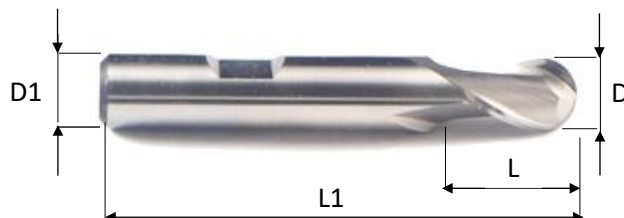

141111

Unid:mm

**HSSCo
8%**

**DIN
327**

Z2



**Tol D
h10**

**Tol D1
h6**

CÓDIGO	D	D1	L	L1
0200	2,00	6	4	48
0250	2,50	6	5	49
0300	3,00	6	5	49
0350	3,50	6	6	50
0400	4,00	6	7	51
0450	4,50	6	7	51
0500	5,00	6	8	52
0550	5,50	6	8	52
0600	6,00	6	8	52
0700	7,00	10	10	60
0800	8,00	10	11	61
0900	9,00	10	11	61
1000	10,00	10	13	63
1100	11,00	12	13	70
1200	12,00	12	16	73
1300	13,00	12	16	73
1400	14,00	12	16	73
1500	15,00	12	16	73
1600	16,00	16	19	79
1800	18,00	16	19	79
2000	20,00	20	22	88
2200	22,00	20	22	88
2400	24,00	25	26	102
2500	25,00	25	26	102
3000	30,00	25	26	102

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRc30~45	HRc 45 ~55	HRc 55~		○					

- Recubrimientos TIN y TIALN, bajo pedido.

⊙ : Excelente

○ : Bueno