


FRESAS DE 2 LABIOS PUNTA SEMIESFÉRICA SERIE LARGA

HSSCo

- **Ejecución:** HSSCo8, tipo N, DIN 327/L, con corte al centro.
- **Aplicación:** para el fresado de ranuras semicirculares y copiado en la fabricación de moldes.

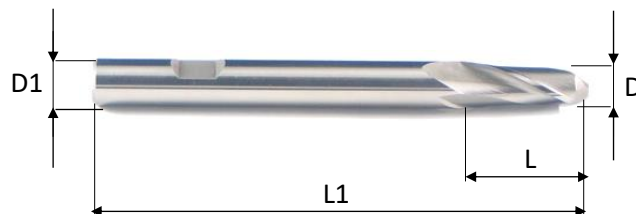

141114

Unid:mm

**HSSCo
8%**

**DIN
327/L**

Z2



**Tol D
h10**

**Tol D1
h6**

CÓDIGO	D	D1	L	L1
0200	2,00	6	7	54
0300	3,00	6	8	56
0400	4,00	6	11	63
0500	5,00	6	13	68
0600	6,00	6	13	68
0700	7,00	10	16	80
0800	8,00	10	19	88
0900	9,00	10	19	88
1000	10,00	10	22	95
1100	11,00	12	22	102
1200	12,00	12	26	110
1400	14,00	12	26	110
1600	16,00	16	32	123
1800	18,00	16	32	123
2000	20,00	20	38	141
2200	22,00	20	38	141
2400	24,00	25	45	166
2500	25,00	25	45	166
3000	30,00	25	45	166

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325 ◎	HRc30~45	HRc 45 ~55	HRc 55~		○					

- Recubrimientos TIN y TIALN, bajo pedido.

◎ : Excelente

○ : Bueno