


FRESAS RANURAR EN T MANGO CILÍNDRICO

HSSCo

- **Ejecución:** HSSCo, tipo N, DIN 851A, con dentado cruzado.
- **Aplicación:** para el fresado de ranuras en T.

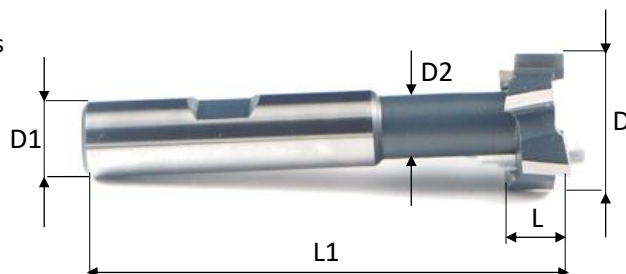


143101

Unid:mm

HSSCo

DIN
851A



Tol D
d11

Tol D₁
h6




CÓDIGO	D	L	D1	L1	D2	Z
1206	12,50	6	10	57	5	6
1608	16,00	8	10	62	6,5	6
1808	18,00	8	12	70	8	6
1909	19,00	9	12	71	8	6
2109	21,00	9	12	74	10	6
2210	22,00	10	12	75	10	6
2511	25,00	11	16	82	12	6
2812	28,00	12	16	83	13	6
3214	32,00	14	16	90	15	6
3616	36,00	16	25	103	17	8
4018	40,00	18	25	108	19	8

FRESAS RANURAR EN T MANGO CÓNICO

HSSCo

- **Ejecución:** HSSCo, tipo N, DIN 851B, con dentado cruzado.
- **Aplicación:** para el fresado de ranuras en T.

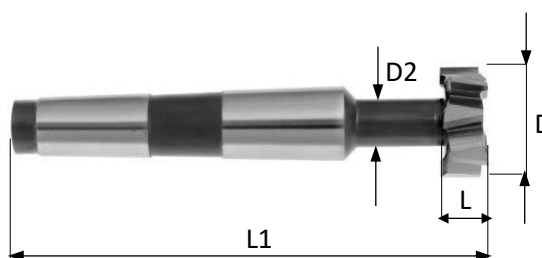


143002

Unid:mm

HSSCo

DIN
851B



Tol D
d11



CÓDIGO	D	L	CM	L1	D2	Z
1808	18,00	8	1	70	8	8
2109	21,00	9	2	74	10	8
2511	25,00	11	2	82	12	8
3214	32,00	14	2	90	15	10
4018	40,00	18	3	108	19	10
5022	50,00	22	4	124	25	10
6028	60,00	28	4	139	30	10

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRC30~45	HRC 45 ~55	HRC 55~							

- Consulten plazo de entrega.

⊙ : Excelente

○ : Bueno