


MACHOS PARA ROSCAR A MÁQUINA AGUJEROS PASANTES Y CIEGOS

M


- Ejecución: HSSE, DIN 371 - DIN 376, con corte inicial forma C.

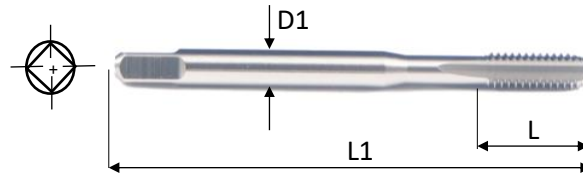

151201

Unid:mm

HSSE

DIN
371-376C
2-3PTol
6H

CÓDIGO	ROSCA-PASO	D1	L	L1	☑	TALADRADO		
0102	M 1 x 0,25	2,5	6	40	2,1	0,75	*	
0204	M 2 x 0,40	2,8	9	40	2,1	1,60	*	
0254	M 2,5 x 0,45	2,8	9	50	2,1	2,05	*	
0305	M 3 x 0,50 •	3,5	11	56	2,7	2,50	*	
0356	M 3,5 x 0,60	4,0	12	56	3,0	2,90	*	
0407	M 4 x 0,70 •	4,5	13	63	3,4	3,30	*	
0457	M 4,5 x 0,75	6,0	14	70	4,9	3,75	*	
0508	M 5 x 0,80 •	6,0	16	70	4,9	4,20	*	
0610	M 6 x 1,00 •	6,0	17	80	4,9	5,00	*	
0710	M 7 x 1,00 •	7,0	17	80	5,5	6,00	*	
0812	M 8 x 1,25 •	8,0	20	90	6,2	6,75	*	
0912	M 9 x 1,25	9,0	20	90	7,0	7,80	*	
1015	M 10 x 1,50 •	10,0	22	100	8,0	8,50	*	

151202

0305	M 3 x 0,50	2,2	11	56	1,8	2,50		*
0407	M 4 x 0,70	2,8	13	63	2,1	3,30		*
0508	M 5 x 0,80	3,5	16	70	2,7	4,20		*
0610	M 6 x 1,00	4,5	17	80	3,4	5,00		*
0710	M 7 x 1,00	5,5	17	80	4,3	6,00		*
0812	M 8 x 1,25	6,0	20	90	4,9	6,75		*
0912	M 9 x 1,25	7,0	20	90	5,5	7,80		*
1015	M 10 x 1,50	7,0	22	100	8,0	8,50		*
1115	M 11 x 1,50	8,0	22	100	6,2	9,50		*
1217	M 12 x 1,75 •	9,0	24	110	7,0	10,20		*
1317	M 13 x 1,75	11,0	24	110	9,0	11,25		*
1420	M 14 x 2,00 •	11,0	26	110	9,0	12,00		*
1520	M 15 x 2,00	12,0	27	110	9,0	13,00		*
1620	M 16 x 2,00 •	12,0	27	110	9,0	14,00		*
1825	M 18 x 2,50 •	14,0	30	125	11,0	15,50		*

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325	HRc30~45	HRc 45 ~55	HRc 55~							

- Consulten plazo de entrega.

- Disponible rosca izquierda: 151473 mango reforzado.
151474 mango delgado.


◎ : Excelente

○ : Bueno

MACHOS PARA ROSCAR A MÁQUINA AGUJEROS PASANTES Y CIEGOS

M


- Ejecución: HSSE, DIN 371 - DIN 376, con corte inicial forma C.

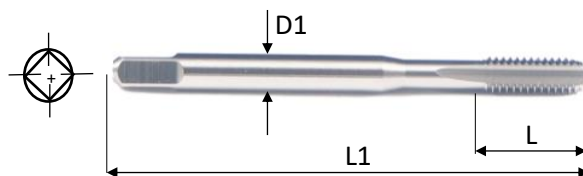

151202

Unid: mm

HSSE

DIN
371-376C
2-3PTol
6H

CÓDIGO	ROSCA-PASO	D1	L	L1	☑	TALADRADO		
2025	M 20 x 2,50 ●	16,0	32	140	12,0	17,50		*
2225	M 22 x 2,50 ●	18,0	32	140	14,5	19,50		*
2430	M 24 x 3,00 ●	18,0	34	160	14,5	21,00		*
2730	M 27 x 3,00 ●	20,0	36	160	16,0	24,00		*
3035	M 30 x 3,50 ●	22,0	40	180	18,0	26,50		*
3335	M 33 x 3,50 ●	25,0	40	180	22,0	29,50		*
3640	M 36 x 4,00 ●	28,0	50	200	22,0	32,00		*
3940	M 39 x 4,00	32,0	50	200	24,0	35,00		*
4245	M 42 x 4,50	32,0	56	200	24,0	37,50		*
4545	M 45 x 4,50	36,0	58	220	29,0	40,50		*
4850	M 48 x 5,00	36,0	65	250	29,0	43,00		*
5250	M 52 x 5,00	40,0	65	250	32,0	47,00		*

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325	HRc30~45	HRc 45 ~55	HRc 55~							

- Consulten plazo de entrega.

- Disponible rosca izquierda: 151473 mango reforzado.
151474 mango delgado.

◎ : Excelente

○ : Bueno