


BRIDA DE FIJACIÓN


G - 400

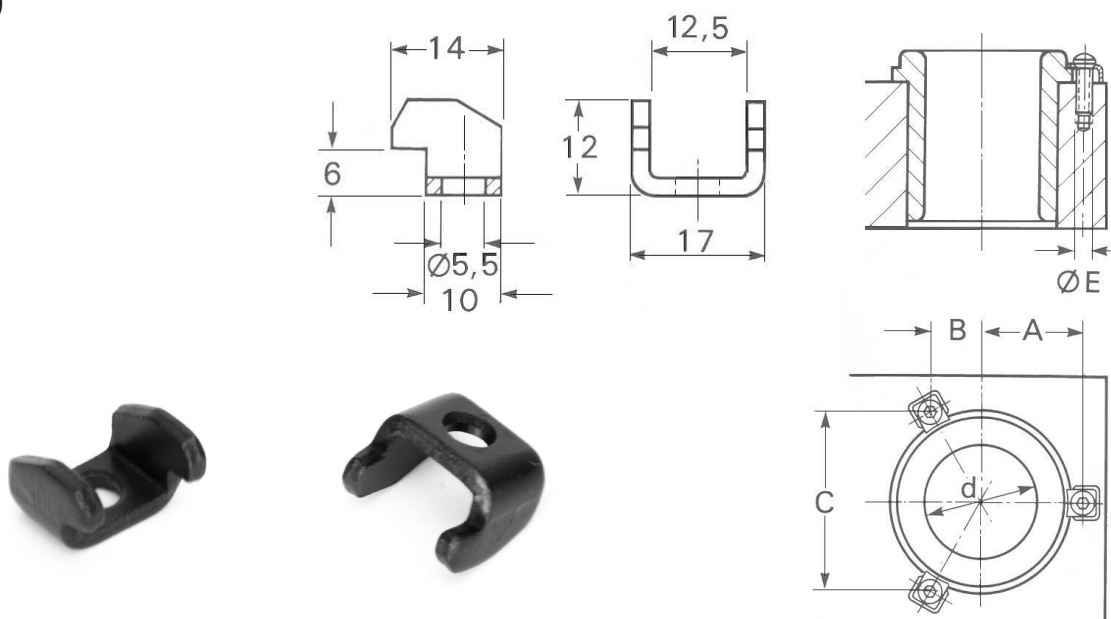

d	A	B	C	E
18 - 19	22,50	11,25	38,96	M 5
24 - 25	27,50	13,75	47,62	M 5
30 - 32	31,50	15,75	54,54	M 5

BRIDA DE FIJACIÓN


G - 401

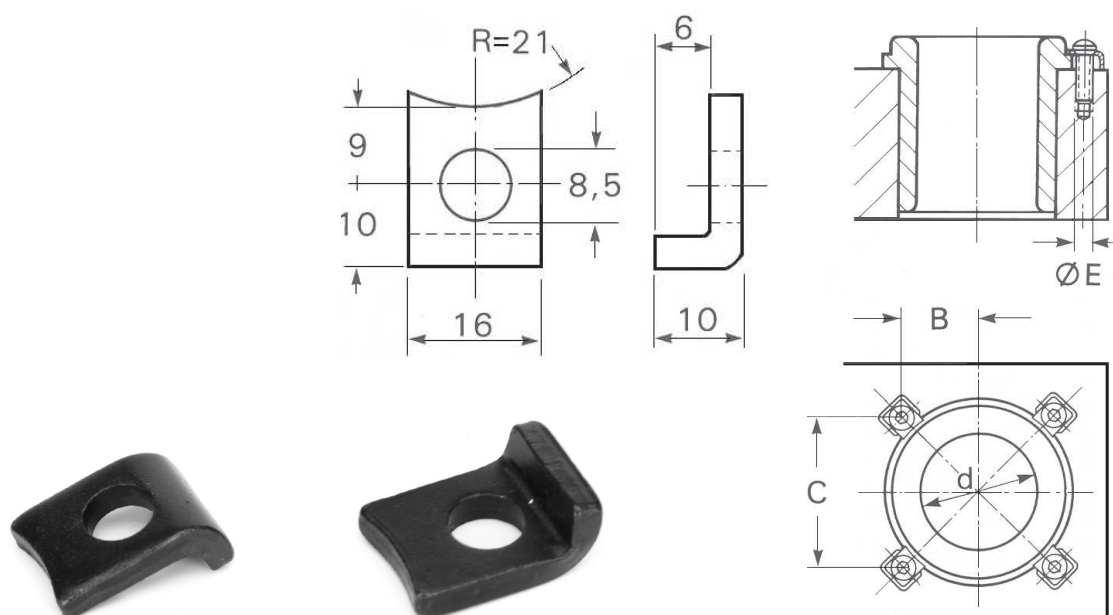


d	B	C	E
40 - 42	26,87	53,74	M 8
50 - 52	31,11	62,22	M 8

BRIDA DE FIJACIÓN G - 402




- Material: C45

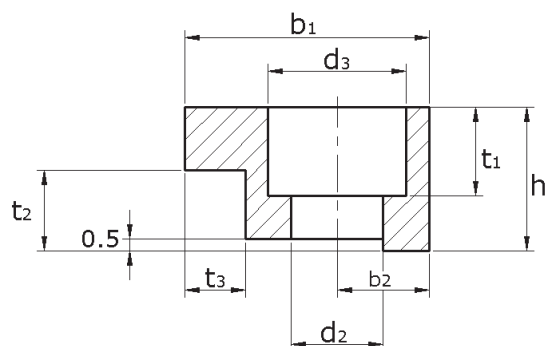

t_2 - 0.3	b_1	b_2	d_2	d_3	h	L	t_1	t_3 + 0.3	Nº brida
6,3	20	7,5	7	11	10	20	7	5	1
10,0	32	11,0	11,5	17,5	16	32	11,5	10	2


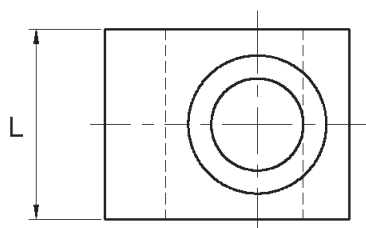


G - 403

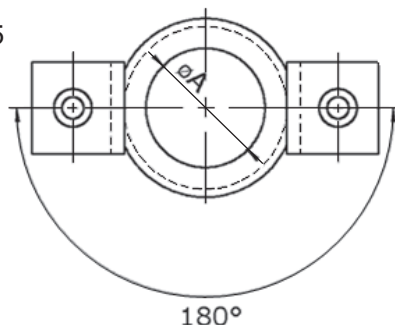

ØA	D	ØH	ØI	J	E	F
20	16	10	5,5	5,5	10	4
25	16	10	5,5	5,5	10	5
32	16	10	5,5	5,5	10	6
40	25	12	6,6	7	12	8
50	30	16	9	9	16	10
63	35	18	11	11	20	12
80	45	22	14	13	25	16
100	50	22	14	13	32	20


G - 404

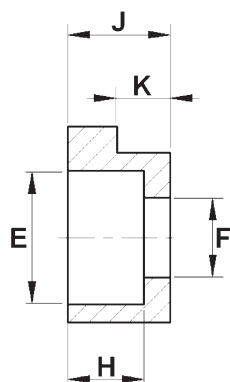

D	B	C	A	E	F	H	J	K
40	21	12	7,75	11	7	6,5	13	8
50	27	15	10	14	9	8	16	10
63	31	20	10,5	14	9	8	18	12

ANILLO RETENCIÓN DE COLUMNA

G - 405

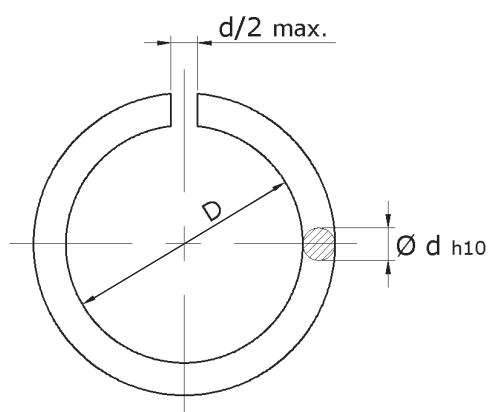


Para columna Ø	D	d
25	22,5	2,5
32	28	4
40	36	4
50	46	4
63	57	6
80	74	6
100	94	6

BRIDA RETENCIÓN DE COLUMNA

G - 406


- Dureza: Pavonado negro

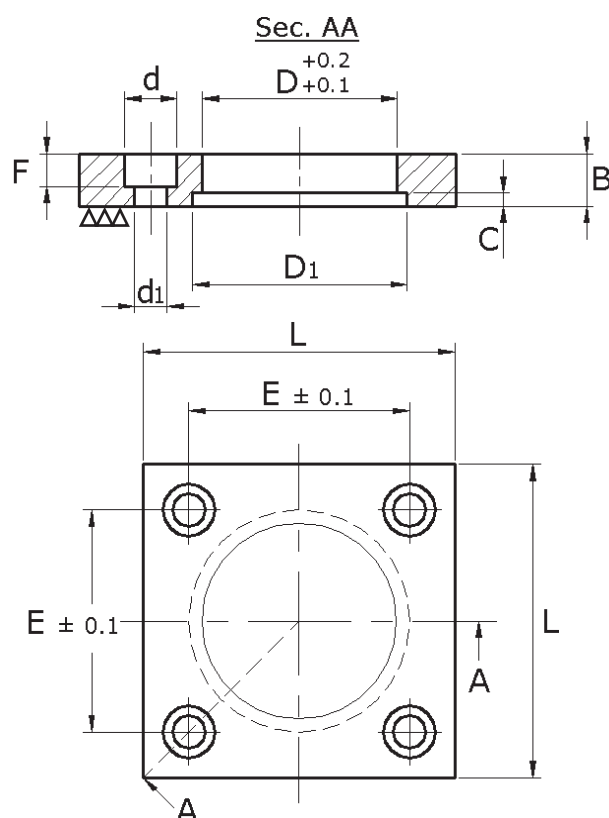

D	D ₁	C	B	L	E	d ₁	d	F
25	28	2,7	10	45	31	6,6	12	7
32	37	4,2	10	56	36	6,6	12	7
40	45	4,2	12	70	50	6,6	12	7
50	55	4,2	14	80	55	9	16	9
63	70	6,2	18	100	70	11	18	11
80	87	6,2	20	110	80	14	22	13
100	107	6,2	20	140	100	14	22	13

BRIDA FIJACIÓN PARA CASQUILLO GUÍA

G - 407


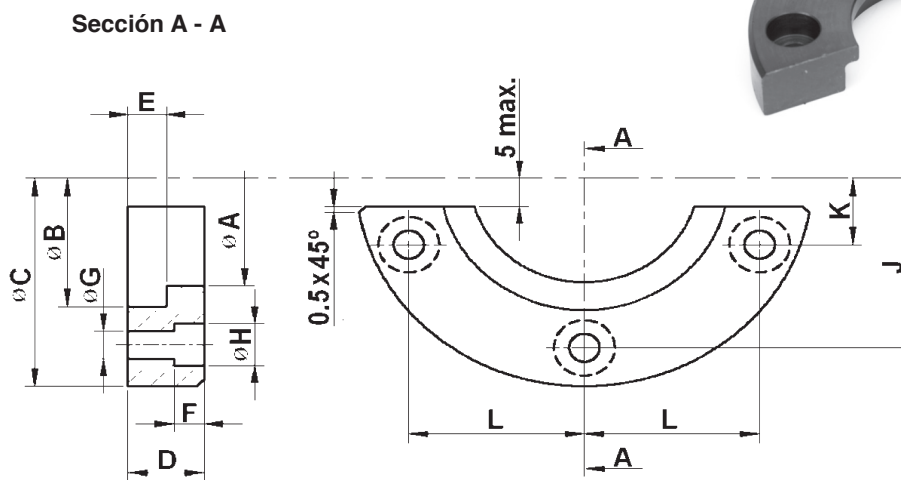


Casquillo Ø	ØA	ØB +0.5 -0.0	ØC	D	ØE +0.15 +0.05	F	ØG H13	ØH H13	J ±0.1	K ±0.1	L ±0.1
20	25	33	63	10	4	7	6,6	12		18	16
25	32	41	72	10	5	7	6,6	12		20	20
32	40	51	80	12	6	7	6,6	12		21	25
40	50	61	100	12	8	7	6,6	12	41	14	38,5
50	63	72	125	16	10	9	9	16	49	17	46
63	80	91	140	20	12	11	11	18	57,5	17	55
80	100	113	180	25	16	13	14	22	72	20	70
100	125	141	200	32	20	13	14	22	85	25	81

ARANDELA DE RETENCIÓN COLUMNA

G - 408

Alojamiento para cabeza de
tornillo según norma DIN 7991

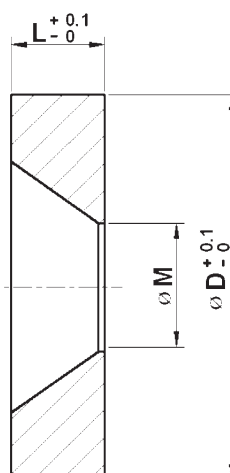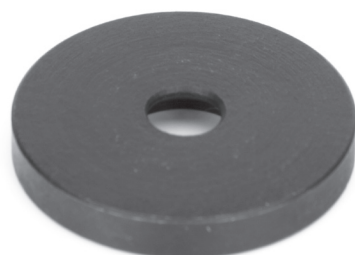

D	L	M	Col.
32	5	M-6	24/25
40	6	M-8	32
50	7	M-8	40
62	7	M-10	50
73	7	M-12	63
93	7	M-12	80