


## COLUMNA

### G - 202 COLUMNA GUÍA DE RETENCIÓN INTERMEDIA

- **Material:** Acero de cementación

- **Dureza:** 60 - 62 HRC

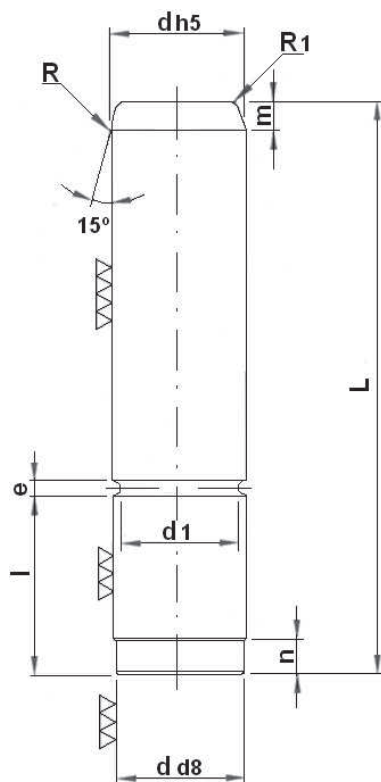

| d              | 25   | 32   | 40   | 50   | 63   | 80   | 100  |
|----------------|------|------|------|------|------|------|------|
| d <sub>1</sub> | 22,3 | 27,8 | 35,8 | 45,8 | 56,8 | 73,8 | 93,8 |
| m              | 8    | 10   | 12   | 16   | 16   | 16   | 16   |
| n              | 8    | 12   | 12   | 12   | 18   | 18   | 18   |
| e              | 2,7  | 4,2  | 4,2  | 4,2  | 6,2  | 6,2  | 6,2  |
| l              | 25   | 32   | 63   | 80   | 100  | 125  | 160  |
| R              | 12,5 | 16   | 20   | 25   | 31,5 | 40   | 50   |
| R <sub>1</sub> | 2    | 2    | 3    | 3    | 5    | 5    | 5    |
| L              | 125  | *    |      |      |      |      |      |
|                | 140  |      |      |      |      |      |      |
|                | 160  |      | *    |      |      |      |      |
|                | 180  |      |      | *    |      |      |      |
|                | 200  |      | *    | *    | *    |      |      |
|                | 220  |      | *    | *    | *    |      |      |
|                | 235  |      |      | *    |      |      |      |
|                | 250  |      | *    | *    | *    | *    |      |
|                | 280  |      |      | *    | *    | *    |      |
|                | 315  |      |      | *    | *    | *    | *    |
|                | 355  |      |      | *    | *    | *    | *    |
|                | 400  |      |      |      | *    | *    | *    |
|                | 450  |      |      |      |      | *    | *    |
|                | 500  |      |      |      |      |      |      |

- Consulten medidas fuera de catálogo