


EXPULSOR CABEZA CÓNICA

DIN 1530 Forma "D"

- Material: 1.2210
- Dureza Vástago: 60 ÷ 62 HRC
- Cabeza: 45 ± 5 HRC
- Forma de pedido: Expulsor D d₁ x L

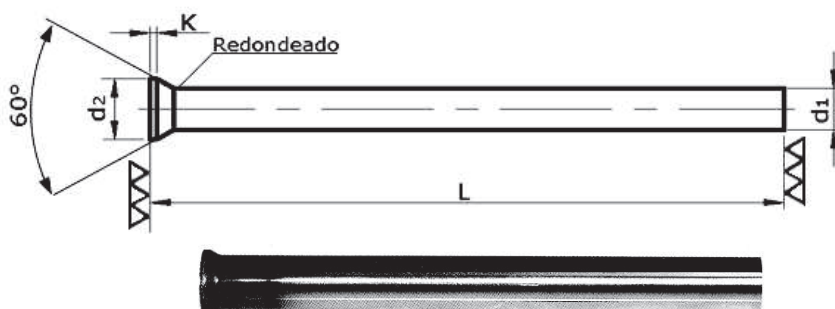

d ₁ g6	d ₂ - 0,2	k ± 0,1	L ⁺¹ ₋₀					
			100	125	160	200	250	315
1,00	1,8	0,5	*	*	*	*		
1,10	1,8	0,5	*	*	*	*		
1,20	2,0	0,5	*	*	*	*		
1,30	2,0	0,5	*	*	*	*		
1,40	2,2	0,5	*	*	*	*		
1,50	2,2	0,5	*	*	*	*		
1,60	2,5	0,5	*	*	*	*		
1,70	2,5	0,5	*	*	*	*		
1,80	2,8	0,5	*	*	*	*		
1,90	2,8	0,5	*	*	*	*		
2,00	3,0	0,5	*	*	*	*	*	
2,10	3,2	0,5	*	*	*	*		
2,20	3,2	0,5	*	*	*	*		
2,30	3,5	0,5	*	*	*	*		
2,40	3,5	0,5	*	*	*	*		
2,50	3,5	0,5	*	*	*	*	*	
2,60	4,0	0,5	*	*	*	*		
2,70	4,0	0,5	*	*	*	*		
2,80	4,0	0,5	*	*	*	*		
2,90	4,0	0,5	*	*	*	*		
3,00	4,5	0,5	*	*	*	*	*	*
3,10	4,5	0,5	*	*	*	*		
3,20	4,5	0,5	*	*	*	*		
3,30	4,5	0,5	*	*	*	*		
3,40	4,5	0,5	*	*	*	*		
3,50	5,0	0,5	*	*	*	*	*	
3,60	5,0	0,5	*	*	*	*		

d ₁ g6	d ₂ - 0,2	k ± 0,1	L ⁺¹ ₋₀					
			100	125	160	200	250	315
3,70	5,0	0,5	*	*	*	*		
3,80	5,0	0,5	*	*	*	*		
3,90	5,0	0,5	*	*	*	*		
4,00	5,5	0,5	*	*	*	*	*	*
4,10	5,5	0,5	*	*	*	*		
4,20	5,5	0,5	*	*	*	*		
4,40	5,5	0,5	*	*	*	*		
4,50	6,0	0,5	*	*	*	*	*	
4,60	6,0	0,5	*	*	*	*		
5,00	6,5	0,5	*	*	*	*	*	*
5,10	6,5	0,5	*	*	*	*		
5,20	6,5	0,5	*	*	*	*		
5,30	6,5	0,5	*	*	*	*		
5,40	6,5	0,5	*	*	*	*		
5,50	7,0	0,5	*	*	*	*	*	
5,60	7,0	0,5	*	*	*	*		
6,00	8,0	0,5	*	*	*	*	*	*
6,50	9,0	1,0	*	*	*	*	*	
7,00	9,0	1,0	*	*	*	*	*	*
7,50	10,0	1,0	*	*	*	*	*	
8,00	10,0	1,0	*	*	*	*	*	*
8,50	11,0	1,0	*	*	*	*	*	
9,00	11,0	1,0	*	*	*	*	*	*
10,00	12,0	1,0	*	*	*	*	*	*
11,00	13,0	1,0	*	*	*	*	*	
12,00	14,0	1,0	*	*	*	*	*	*
13,00	15,0	1,5	*	*	*	*	*	
14,00	16,0	1,5	*	*	*	*	*	*
15,00	17,0	1,5	*	*	*	*	*	
16,00	18,0	1,5	*	*	*	*	*	*