


EXPULSOR LAMINAR NITRURADO ALN


- Material: 1.2344
- Dureza caña: 950 HV 0.3
- Resistencia a la temperatura: 500° - 550°C
- Forma de pedido: Expulsor ALN/a x b x L

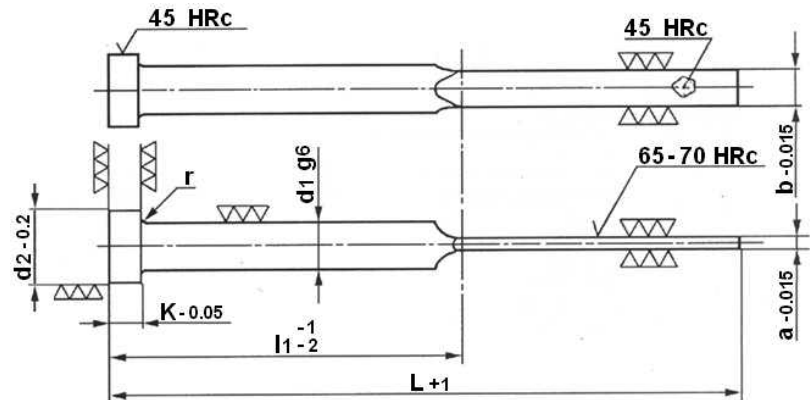

d ₁	d ₂	k	r	a	b	L						
						100	125	160	200	250	315	400
						l ₁						
4	8	3	0,3	1	3,5	*	*					
				1,2	3,5	*	*					
5	10	3	0,3	1	3,8	*	*					
				1,2	4,5	*	*	*				
6	12	5	0,5	1,5	4,5	*	*	*				
				1,8	4,5	*	*	*	*			
8	14	5	0,5	1,2	5,5	*	*	*	*			
				1,5	5,5	*	*	*	*			
10	16	5	0,5	1,8	5,5	*	*	*	*			
				2	5,5	*	*	*	*			
12	18	7	0,8	1,2	7,5	*	*	*	*			
				1,5	7,5		*	*	*	*		
14	22	7	0,8	1,8	7,5		*	*	*	*		
				2	7,5		*	*	*	*	*	
16	22	7	0,8	1,5	9,5			*	*	*	*	
				1,8	9,5			*	*	*	*	
20	26	8	1	2	9,5				*	*	*	*
				1,5	10			*	*	*	*	*
				1,8	10			*	*	*	*	*
				2	10				*	*	*	*
				1,8	12				*	*	*	*
				2	12				*	*	*	*
				2,5	12				*	*	*	*
				2	15				*	*	*	*
				2,5	15				*	*	*	*
				3	19				*	*	*	*
				4	19				*	*	*	*

EXPULSOR CABEZA CILÍNDRICA NITRURADO TIPO C

- Material: 1.2344
- Dureza caña: 950 HV 0.3
- Resistencia a la temperatura: 500° - 550°C

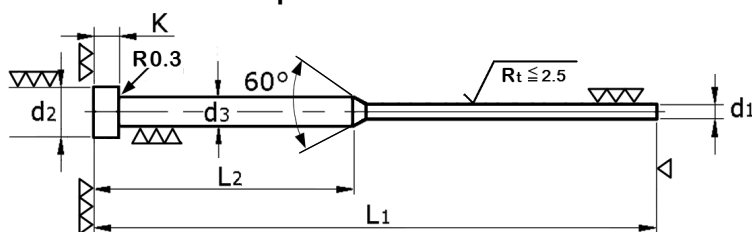

d ₁ g6	d ₂ -0,2	d ₃ g6	k ± 0,05	r	L ₁ + 1			
					100	125	160	200
					L ₂			
1,5	6	3	3	0,3	50	50	75	75
					*	*	*	*
					*	*	*	*
2	6	3	3	0,3	*	*	*	*
					*	*	*	*
2,5	6	3	3	0,3	*	*	*	*

- Consulten plazo de entrega

- Forma de pedido: Expulsor tipo C/d1 x L1