


MATRIZ CON VALONA

Material	Dureza
HSS	62 ± 2 HRC

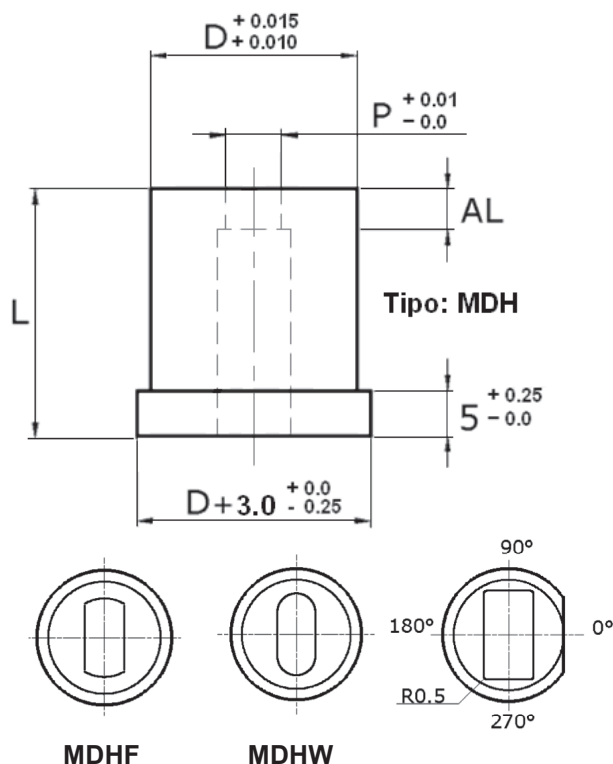

Ref. D	AL	P/W	L						
			20	22	25	28	30	32	35
MDH_ 5	3,2	1,5 - 3,0							
MDH_ 6	3,2	1,5 - 4,0							
MDH_ 8	3,2	2,0 - 5,0							
MDH_ 10	3,2	2,0 - 6,5							
MDH_ 13	5	3,0 - 8,5							
MDH_ 16	5	6,0 - 10,5							
MDH_ 20	5	8,0 - 13,5							
MDH_ 22	6	8,0 - 15,0							
MDH_ 25	6	12,0 - 17,0							
MDH_ 32	6	12,0 - 26,0							
MDH_ 35	6	12,0 - 28,0							
MDH_ 38	8	12,0 - 30,0							
MDH_ 40	8	16,0 - 32,0							


- Consulten otras longitudes, formas, diámetros, tolerancias, materiales

- o Posición antigiro (Pág. 23 y 24)
- o Formas especiales (Pág. 25 y 26)
- o Recubrimientos y materiales (Pág. 27)

- Forma de pedido: Matriz MDHP10 P-5.0 25 lg AL=5

Matriz MDHR20 P-7.5 W-5.5 32 lg AL=5 0°

- Consulten plazo de entrega



Posibilidad con
desahogo en cono