


MUELLE CARGA LIGERA

Serie V

ISO 10243

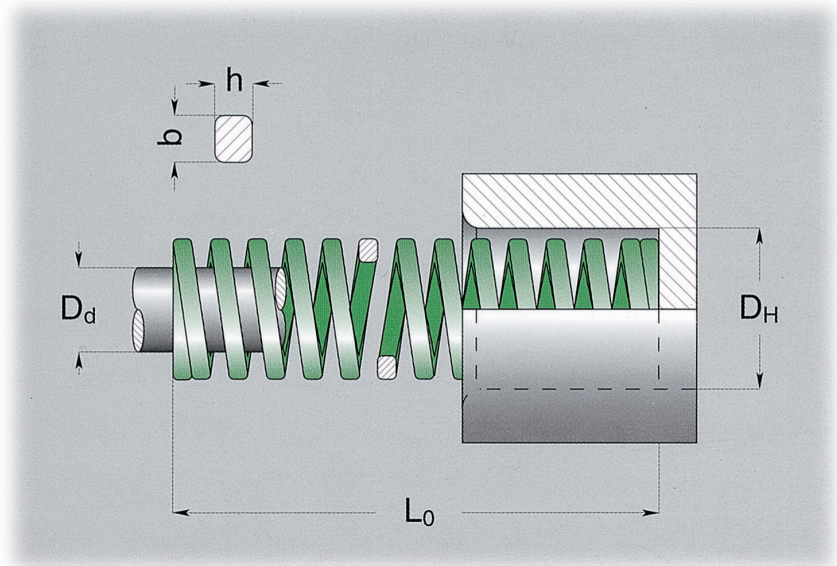

D_H D_d b x h		L ₀	Nº de catálogo	Rigidez	 25% 3.000.000	 30% 1.500.000	 40% Máxima Compresión	 D Aprox.
mm	mm	mm		N / mm	mmN	mmN	mmN	mmN
10	5	25	V 10 - 025	10	6,363	7,575	10,0100	13,5135
		32	V 10 - 032	8,5	8,068	9,682	12,8109	17,5149
		38	V 10 - 038	6,8	9,565	11,478	15,2103	20,8141
		44	V 10 - 044	6,0	11,066	13,279	17,6106	23,9143
		51	V 10 - 051	5,0	12,864	15,377	20,4102	28,9145
		64	V 10 - 064	4,3	16,069	19,283	25,6110	36,1155
		76	V 10 - 076	3,2	19,061	22,873	30,497	43,2138
		305	V 10 - 305	1,1	76,384	91,5101	122,0134	178,7197
12,5	6,3	25	V 13 - 025	17,9	6,3113	7,5134	10,0179	13,2236
		32	V 13 - 032	16,4	8,0131	9,6157	12,8210	18,0295
		38	V 13 - 038	13,6	9,5129	11,4155	15,2207	21,0286
		44	V 13 - 044	12,1	11,0133	13,2160	17,6213	24,0290
		51	V 13 - 051	11,4	12,8146	15,3174	20,4233	28,7327
		64	V 13 - 064	9,3	16,0149	19,2179	25,6238	35,8333
		76	V 13 - 076	7,1	19,0135	22,8162	30,4216	42,7303
		89	V 13 - 089	5,4	22,3120	26,7144	35,6192	50,4272
2,4 x 1,4	102	V 13 - 102	4,1	25,5105	30,6125	40,8167	58,4239	
	305	V 13 - 305	1,4	76,3107	91,5128	122,0171	172,0241	
16	8	25	V 16 - 025	23,4	6,3147	7,5176	10,0234	12,6295
		32	V 16 - 032	22,9	8,0183	9,6220	12,8293	16,4376
		38	V 16 - 038	19,3	9,5183	11,4220	15,2293	19,7380
		44	V 16 - 044	17,1	11,0188	13,2226	17,6301	22,5385
		51	V 16 - 051	15,7	12,8201	15,3240	20,4320	26,3413
		64	V 16 - 064	10,7	16,0171	19,2205	25,6274	33,3356
		76	V 16 - 076	10,0	19,0190	22,8228	30,4304	40,2402
		89	V 16 - 089	8,6	22,3192	26,7230	35,6306	47,6409
3,2 x 1,5	102	V 16 - 102	7,8	25,5199	30,6239	40,8318	55,4432	
	115	V 16 - 115	6,6	28,8190	34,5228	46,0304	60,8401	
305	V 16 - 305	2,5	76,3191	91,5229	122,0305	165,3413		
20	10	25	V 20 - 025	55,8	6,3352	7,5419	10,0558	12,1675
		32	V 20 - 032	45,0	8,0360	9,6432	12,8576	15,3689
		38	V 20 - 038	33,3	9,5316	11,4380	15,2506	18,9629
		44	V 20 - 044	30,0	11,0330	13,2396	17,6528	21,5645
		51	V 20 - 051	24,5	12,8314	15,3375	20,4500	25,0613
		64	V 20 - 064	20,0	16,0320	19,2384	25,6512	31,1622
		76	V 20 - 076	16,0	19,0304	22,8365	30,4486	37,3597
		89	V 20 - 089	14,0	22,3312	26,7374	35,6498	44,5623
		102	V 20 - 102	12,0	25,5306	30,6367	40,8490	51,1613
		115	V 20 - 115	10,9	28,8314	34,5376	46,0501	58,2634
		127	V 20 - 127	9,5	31,8302	38,1362	50,8483	64,9617
		139	V 20 - 139	8,4	35,0294	42,0353	56,0470	71,5601
		152	V 20 - 152	7,5	38,0285	45,6342	60,8456	78,8591
		305	V 20 - 305	4,0	76,3305	91,5366	122,0488	157,4630

Nota: 1 N = 0,102 Kg (fuerza)

D _H D _d		L ₀	Nº de catálogo	Rigidez	 25% 3.000.000		 30% 1.500.000		 40% Máxima Compresión		 D Aprox.			
b x h					N / mm	mm	N	mm	N	mm	N	mm	N	
mm	mm	mm												
25	12,5	25	V 25 - 025	100,0	6,3	630	7,5	750	10,0	1000	11,9	1190		
		32	V 25 - 032	80,3	8,0	642	9,6	771	12,8	1028	16,0	1285		
		38	V 25 - 038	62,0	9,5	589	11,4	707	15,2	942	18,3	1135		
		44	V 25 - 044	52,9	11,0	582	13,2	698	17,6	931	21,4	1132		
		51	V 25 - 051	44,0	12,8	563	15,3	673	20,4	898	24,9	1096		
		64	V 25 - 064	35,2	16,0	563	19,2	676	25,6	901	31,4	1105		
		76	V 25 - 076	28,0	19,0	532	22,8	638	30,4	851	37,5	1050		
		89	V 25 - 089	24,0	22,3	535	26,7	641	35,6	854	43,5	1044		
		102	V 25 - 102	21,1	25,5	538	30,6	646	40,8	861	51,1	1078		
		115	V 25 - 115	18,7	28,8	539	34,5	645	46,0	860	58,1	1086		
		127	V 25 - 127	16,7	31,8	531	38,1	636	50,8	848	64,1	1070		
		139	V 25 - 139	15,3	35,0	536	42,0	643	56,0	857	70,4	1077		
		152	V 25 - 152	14,0	38,0	532	45,6	638	60,8	851	77,1	1079		
		178	V 25 - 178	12,5	44,5	556	53,4	668	71,2	890	93,1	1164		
		203	V 25 - 203	10,4	50,8	528	60,9	633	81,2	844	102,7	1068		
5,4 x 2,7		305	V 25 - 305	7,0	76,3	534	91,5	641	122,0	854	155,9	1091		
32	16	38	V 32 - 038	94,0	9,5	893	11,4	1072	15,2	1429	18,3	1720		
		44	V 32 - 044	79,5	11,0	875	13,2	1049	17,6	1399	21,5	1709		
		51	V 32 - 051	67,0	12,8	858	15,3	1025	20,4	1367	25,5	1709		
		64	V 32 - 064	53,0	16,0	848	19,2	1018	25,6	1357	31,9	1691		
		76	V 32 - 076	44,0	19,0	836	22,8	1003	30,4	1338	38,6	1698		
		89	V 32 - 089	37,2	22,3	830	26,7	993	35,6	1324	46,5	1730		
		102	V 32 - 102	32,0	25,5	816	30,6	979	40,8	1306	53,2	1702		
		115	V 32 - 115	29,0	28,8	835	34,5	1001	46,0	1334	60,0	1740		
		127	V 32 - 127	25,0	31,8	795	38,1	953	50,8	1270	66,7	1668		
		139	V 32 - 139	23,0	35,0	805	42,0	966	56,0	1288	71,8	1651		
		152	V 32 - 152	21,5	38,0	817	45,6	980	60,8	1307	78,5	1688		
		178	V 32 - 178	18,2	44,5	810	53,4	972	71,2	1296	94,4	1718		
		203	V 32 - 203	15,8	50,8	803	60,9	962	81,2	1283	107,1	1692		
		254	V 32 - 254	12,5	63,5	794	76,2	953	101,6	1270	136,5	1706		
		6,8 x 3,3		305	V 32 - 305	10,3	76,3	786	91,5	942	122,0	1257	162,7	1676
40	20	51	V 40 - 051	92,0	12,8	1178	15,3	1408	20,4	1877	25,5	2346		
		64	V 40 - 064	73,0	16,0	1168	19,2	1402	25,6	1869	31,4	2292		
		76	V 40 - 076	63,0	19,0	1197	22,8	1436	30,4	1915	37,8	2381		
		89	V 40 - 089	51,0	22,3	1137	26,7	1362	35,6	1816	44,3	2259		
		102	V 40 - 102	43,0	25,5	1097	30,6	1316	40,8	1754	50,7	2180		
		115	V 40 - 115	39,6	28,8	1140	34,5	1366	46,0	1822	58,1	2301		
		127	V 40 - 127	37,0	31,8	1177	38,1	1410	50,8	1880	64,6	2390		
		139	V 40 - 139	32,0	35,0	1120	42,0	1344	56,0	1792	70,1	2243		
		152	V 40 - 152	28,0	38,0	1064	45,6	1277	60,8	1702	76,6	2145		
		178	V 40 - 178	25,2	44,5	1121	53,4	1346	71,2	1794	90,4	2278		
		203	V 40 - 203	22,7	50,8	1153	60,9	1382	81,2	1843	102,4	2324		
		254	V 40 - 254	17,0	63,5	1080	76,2	1295	101,6	1727	128,8	2190		
		8,1 x 4,0		305	V 40 - 305	14,8	76,3	1129	91,5	1354	122,0	1806	156,1	2310
		50	25	64	V 50 - 064	156	16,0	2496	19,2	2995	25,6	3994	31,0	4836
				76	V 50 - 076	125	19,0	2375	22,8	2850	30,4	3800	37,2	4650
89	V 50 - 089			109	22,3	2431	26,7	2910	35,6	3880	43,6	4752		
102	V 50 - 102			94,0	25,5	2397	30,6	2876	40,8	3835	50,3	4728		
115	V 50 - 115			81,0	28,8	2333	34,5	2795	46,0	3726	58,1	4706		
127	V 50 - 127			71,0	31,8	2258	38,1	2705	50,8	3607	63,7	4523		
139	V 50 - 139			66,5	35,0	2328	42,0	2793	56,0	3724	69,5	4622		
152	V 50 - 152			60,0	38,0	2280	45,6	2736	60,8	3648	76,5	4590		
178	V 50 - 178			52,0	44,5	2314	53,4	2777	71,2	3702	91,9	4779		
203	V 50 - 203			44,0	50,8	2235	60,9	2680	81,2	3573	104,7	4607		
254	V 50 - 254			35,0	63,5	2223	76,2	2667	101,6	3556	130,6	4571		
10,9 x 5,3				305	V 50 - 305	28,5	76,3	2175	91,5	2608	122,0	3477	154,9	4415
63	38			76	V 63 - 076	189	19,0	3591	22,8	4309	30,4	5746	36,5	6899
				89	V 63 - 089	158	22,3	3523	26,7	4219	35,6	5625	43,4	6857
				102	V 63 - 102	131	25,5	3341	30,6	4009	40,8	5345	49,7	6511
		115	V 63 - 115	116	28,8	3341	34,5	4002	46,0	5336	55,6	6450		
		127	V 63 - 127	103	31,8	3275	38,1	3924	50,8	5232	62,7	6458		
		152	V 63 - 152	84,3	38,0	3203	45,6	3844	60,8	5125	77,1	6500		
		178	V 63 - 178	71,5	44,5	3182	53,4	3818	71,2	5091	92,2	6592		
		203	V 63 - 203	61,7	50,8	3134	60,9	3758	81,2	5010	103,5	6386		
		254	V 63 - 254	47,0	63,5	2985	76,2	3581	101,6	4775	130,4	6129		
		11,0 x 7,8		305	V 63 - 305	38,2	76,3	2915	91,5	3495	122,0	4660	157,4	6013

Nota: 1 N = 0,102 Kg (fuerza)