


MUELLE

SERIE L	Do Diámetro exterior	Di Diámetro interior	Lo Longitud	R Rigidez	 A 16% L0	 B 24% L0	 C 32% L0			
	d			±10%	+ 3.000.000		~ 1.500.000		100 - 200.000	
	mm	mm	mm	N/mm	mm	N	mm	N	mm	N
L 4 - 010	4	2.6	10	4.9	1.6	7.8	2.4	11.6	3.2	15.7
L 4 - 015			15	2.94	2.4	7.8	3.6	11.6	4.8	15.7
L 4 - 020			20	2.94	3.2	7.8	4.8	11.6	6.4	15.7
L 4 - 0,25			25	1.96	4.0	7.8	6.0	11.6	8.0	15.7
L 4 - 030	0.6		30	1.96	4.8	7.8	7.2	11.6	9.6	15.7
L 6 - 015	6	4	15	7.85	2.4	17.7	3.6	26.5	4.8	35.5
L 6 - 020			20	5.88	3.2	17.7	4.8	26.5	6.4	35.5
L 6 - 025			25	4.90	4.0	17.7	6.0	26.5	8.0	35.5
L 6 - 030			30	3.92	4.8	17.7	7.2	26.5	9.6	35.5
L 6 - 035	0.9		35	2.94	5.6	17.7	8.4	26.5	11.2	35.5
L 8 - 015	8	5.4	15	12.75	2.4	31.4	3.6	47.1	4.8	62.8
L 8 - 020			20	9.81	3.2	31.4	4.8	47.1	6.4	62.8
L 8 - 025			25	7.85	4.0	31.4	6.0	47.1	8.0	62.8
L 8 - 030			30	6.86	4.8	31.4	7.2	47.1	9.6	62.8
L 8 - 035	1.2		35	5.88	5.6	31.4	8.4	47.1	11.2	62.8
L 8 - 040			40	4.90	6.4	31.4	9.6	47.1	12.8	62.8

BARRA DE POLIURETANO

- Dureza: 90 shore

Manguitos

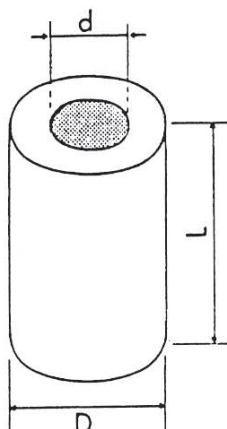


D	d	Longitud de suministro
		500
20	8,5	*
25	10,5	*
30	10,5	*
35	13,5	*
40	13,5	*
50	17	*
60	17	*
80	21	*

D = diámetro exterior

d = diámetro interior

L = longitud de suministro

Barra

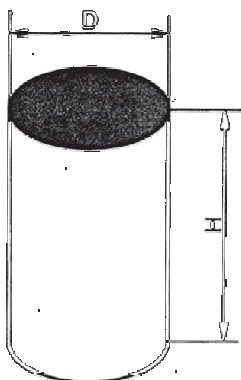

D	H
15	500
20	500
25	500
30	500
35	500
40	500
45	500
50	500

D	H
60	500
70	500
80	500
100	500
125	500
140	500

D = Ø exteriores

H = Longitud