




PUNZÓN CABEZA CÓNICA DIN 9861 DAT

Material	Dureza	
	Vástago	Cabeza
HSS	62 ± 2 HRC	50 ± 5 HRC

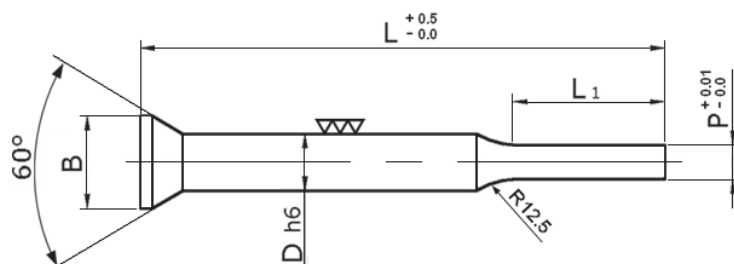


Ref. D	B	L		
		71	80	100
DAT 3,0-3,4	4,5			
DAT 3,5-3,9	5,0			
DAT 4,0-4,4	5,5			
DAT 4,5-4,9	6,0			
DAT 5,0-5,4	6,5			
DAT 5,5-5,9	7,0			
DAT 6,0-6,4	8,0			
DAT 6,5-7,4	9,0			
DAT 7,5-8,4	10,0			
DAT 8,5-9,4	11,0			
DAT 9,5-10,4	12,0			
DAT 10,5-11,4	13,0			
DAT 11,5-12,4	14,0			
DAT 12,5-13,4	15,0			
DAT 13,5-14,4	16,0			
DAT 14,5-15,4	17,0			
DAT 15,5-16,0	18,0			


Tipo B



Tipo C



Tipo D



Tipo AL



- Consulten otras longitudes, formas, diámetros, tolerancias, materiales

- o Posición antigiro (Pág. 23 y 24)
- o Formas especiales (Pág. 25 y 26)
- o Recubrimientos y materiales (Pág. 27)

- Forma de pedido: Punzón DAT10C P-5,5 x 71 lg

- Consulten plazo de entrega

Longitud alternativa a especificar