


CASQUILLO GUÍA

DIN 172 (A)

Material	Dureza
Acero cementación	60 ÷ 62 HRC

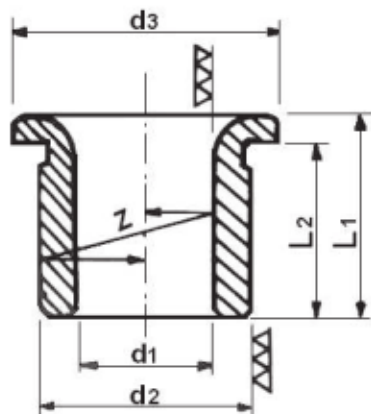

d ₁ F7	d ₂ n6	d ₃	Cortos		Largos		Z
			L ₁	L ₂	L ₁	L ₂	
0,8 - 1,0	3	6	6	4	9	7	0,010
1,1 - 1,8	4	7	6	4	9	7	
1,9 - 2,6	5	8	6	4	9	7	
2,7 - 3,3	6	9	8	5,5	12	9,5	
3,4 - 4,0	7	10	8	5,5	12	9,5	
4,1 - 5,0	8	11	8	5,5	12	9,5	

5,1 - 6,0	10	13	10	7	16	13	0,020
6,1 - 8,0	12	15	10	7	16	13	
8,1 - 10,0	15	18	12	9	20	17	
10,1 - 12,0	18	22	12	8	20	16	
12,25 - 15,0	22	26	16	12	28	24	
15,25 - 18,0	26	30	16	12	28	24	
18,25 - 22,0	30	34	20	15	36	31	
23,0 - 26,0	35	39	20	15	36	31	
27,0 - 30,0	42	46	25	20	45	40	

31,0 - 35,0	48	52	25	20	45	40	0,040
36,0 - 42,0	55	59	30	25	56	51	

- Forma de pedido: Casq. DIN 172A d₁ x L₁

- Medidas normalizadas en stock: L₁ corto y largo

Ø 0,8 a 1,9 mm el incremento progresivo es de 0,10 mm.

Ø 2 a 12 mm el incremento progresivo es de 0,10 mm incluido 0,25 y 0,75 mm.

Ø 12,25 a 18 mm el incremento progresivo es de 0,25 mm.

Ø 19 a 42 mm el incremento progresivo es de 1 mm.