


CASQUILLO GUÍA

DIN 179 (A)

Material	Dureza
Acero cementación	60 ÷ 62 HRC

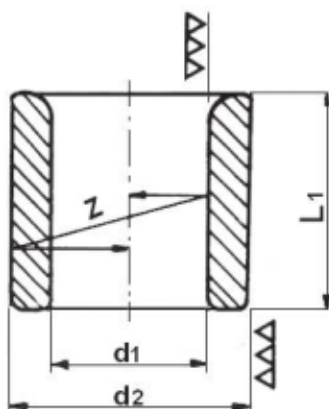

- Forma de pedido: Casq. DIN 179A d₁ x L₁

d ₁ F7	d ₂ n6	L ₁		Z
		Cortos	Largos	
0,8 - 1,0	3	6	9	0,010
1,1 - 1,8	4	6	9	
1,9 - 2,6	5	6	9	
2,7 - 3,3	6	8	12	
3,4 - 4,0	7	8	12	
4,1 - 5,0	8	8	12	0,020
5,1 - 6,0	10	10	16	
6,1 - 8,0	12	10	16	
8,1 - 10,0	15	12	20	
10,1 - 12,0	18	12	20	
12,25 - 15,0	22	16	28	
15,25 - 18,0	26	16	28	
18,25 - 22,0	30	20	36	
23,0 - 26,0	35	20	36	
27,0 - 30,0	42	25	45	0,040
31,0 - 35,0	48	25	45	
36,0 - 42,0	55	30	56	

- Medidas normalizadas en stock: L₁ corto y largo

Ø 0,8 a 1,9 mm el incremento progresivo es de 0,10 mm.

Ø 2 a 12 mm el incremento progresivo es de 0,10 mm incluido 0,25 y 0,75 mm.

Ø 12,25 a 18 mm el incremento progresivo es de 0,25 mm.

Ø 19 a 42 mm el incremento progresivo es de 1 mm.