


BROCAS MANGO CÓNICO DIN 341

LARGA

- **Ejecución:** HSSCo 5%, tipo S, DIN 341.
- Perfil rectificado, corte a derecha.
- Broca especial para perforaciones profundas.
- La espiral de la ranura permite una buena evacuación de la viruta.

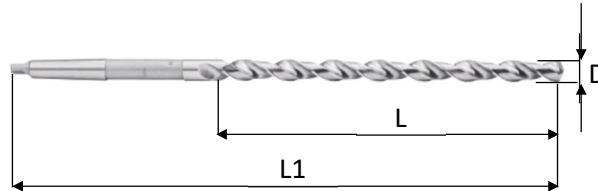

125002

Unid:mm

HSSCo
5%DIN
341Tol D
h8

CÓDIGO	D	CM	L	L1	CÓDIGO	D	CM	L	L1
1000	10,00	1	116	197	2100	21,00	2	184	282
1100	11,00	1	125	206	2150	21,50	2	191	289
1200	12,00	1	134	215	2200	22,00	2	191	289
1300	13,00	1	134	215	2250	22,50	2	198	296
1400	14,00	1	142	223	2300	23,00	3	198	296
1500	15,00	2	147	245	2350	23,50	3	198	319
1550	15,50	2	153	251	2400	24,00	3	206	327
1600	16,00	2	153	251	2450	24,50	3	206	327
1650	16,50	2	159	257	2500	25,00	3	206	327
1700	17,00	2	159	257	2600	26,00	3	214	335
1750	17,50	2	165	263	2700	27,00	3	222	343
1800	18,00	2	165	263	2800	28,00	3	222	343
1850	18,50	2	171	269	2900	29,00	3	230	351
1900	19,00	2	171	269	3000	30,00	3	230	351
1950	19,50	2	177	275	3100	31,00	3	239	360
2000	20,00	2	177	275	3200	32,00	4	248	397
2050	20,50	2	184	282					

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRC30~45	HRC 45 ~55	HRC 55~	○	○	○				

- Consulten plazo de entrega.

⊙ : Excelente

○ : Bueno