


MACHOS PARA ROSCAR A MANO

NPTF


- Ejecución: HSS.
- Macho unitario.
- Rosca AMERICANA.
- Rosca cónica no estanca.

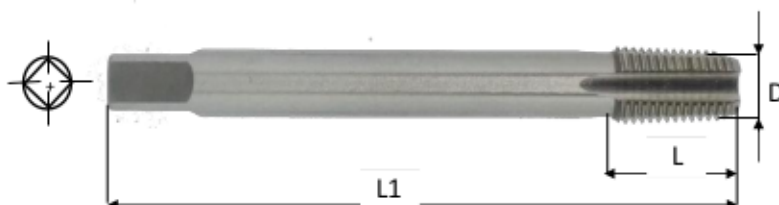

151073

Unid: mm

HSS



CÓDIGO	ROSCA-HILO	D	L	L1	☐	TALADRADO
0627	NPTF 1/8-27h	10,22	19	54	8,0	8,50
1418	NPTF 1/4-18h	13,58	27	62	11,0	11,00
1818	NPTF 3/8-18h	17,02	27	65	13,0	14,50
2214	NPTF 1/2-14h	21,21	35	80	13,0	17,80
3014	NPTF 3/4-14h	26,56	35	83	17,0	23,00
3411	NPTF 1-11,5h	33,19	44	95	21,0	29,00

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
-HB225 ◎	HB225 -325	HRc30-45	HRc 45 -55	HRc 55-							