


MACHOS PARA ROSCAR A MANO

- Ejecución: HSS, DIN 40430.
- Macho unitario.

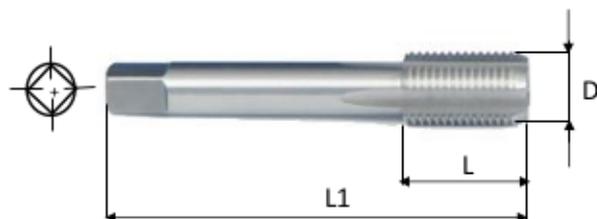


151076

Unid: mm

HSS

DIN
40430



| CÓDIGO | ROSCA-HILO | D | L | L1 | ☑ | TALADRADO |
|--------|-------------|------|----|-----|------|-----------|
| 0720 | Pg 7-20h | 12,5 | 20 | 70 | 7,0 | 11,50 |
| 0918 | Pg 9-18h | 15,2 | 20 | 70 | 9,0 | 14,00 |
| 1118 | Pg 11-18h | 18,6 | 22 | 80 | 11,0 | 17,25 |
| 1318 | Pg 13,5-18h | 20,4 | 22 | 80 | 12,0 | 19,00 |
| 1618 | Pg 16-18h | 22,5 | 22 | 80 | 14,5 | 21,25 |
| 2116 | Pg 21-16h | 28,3 | 22 | 90 | 18,0 | 27,00 |
| 2916 | Pg 29-16h | 37,0 | 25 | 100 | 22,0 | 35,50 |
| 3616 | Pg 36-16h | 47,0 | 32 | 140 | 29,0 | 45,50 |
| 4216 | Pg 42-16h | 54,0 | 36 | 140 | 32,0 | 52,50 |
| 4816 | Pg 48-16h | 59,3 | 36 | 160 | 35,0 | 58,00 |