
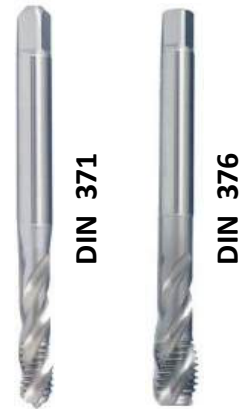


MACHOS PARA ROSCAR A MÁQUINA AGUJEROS CIEGOS

BSW

- **Ejecución:** HSSE, DIN 371 - DIN 376, con corte inicial forma C, hélice 35°.

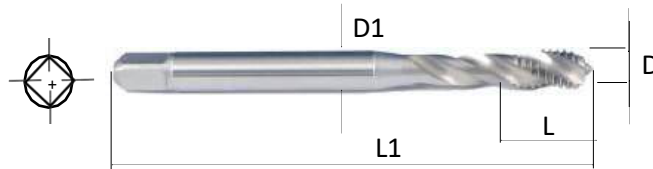

151963

Unid:mm

HSSE

DIN
371-376



C
2-3P

Tol
CLASE 2



CÓDIGO	ROSCA-HILO	D	D1	L	L1	☐	TALADRADO	
0640	W 1/8-40h	3,17	3,5	11	56	2,7	2,55	*
0832	W 5/32-32h	3,97	4,5	13	63	3,4	3,10	*
1024	W 3/16-24h	4,76	6,0	15	70	4,9	3,60	*
1420	W 1/4-20h	6,35	7,0	17	80	5,5	5,10	*
1618	W 5/16-18h	7,94	8,0	20	90	6,2	6,50	*
1816	W 3/8-16h	9,52	10,0	22	100	8,0	7,90	*

151964

2014	W 7/16-14h	11,11	8,0	22	100	6,2	9,25	*
2212	W 1/2-12h	12,70	9,0	24	110	7,0	10,50	*
2412	W 9/16-12h	14,29	11,0	26	110	9,0	12,00	*
2611	W 5/8-11h	15,87	12,0	27	110	9,0	13,40	*
3010	W 3/4-10h	19,05	14,0	30	125	11,0	16,50	*
3209	W 7/8-9h	22,22	18,0	32	140	14,5	19,25	*
3408	W 1-8h	25,40	18,0	36	160	14,5	21,75	*

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325	HRc30~45	HRc 45 ~55	HRc 55~							

- Consulten plazo de entrega.

◎ : Excelente

○ : Bueno