


MACHOS PARA ROSCAR A MÁQUINA

BSPT

- **Ejecución:** HSSE, DIN 5156, con corte inicial forma C.
- Rosca cónica inglesa para tubo.

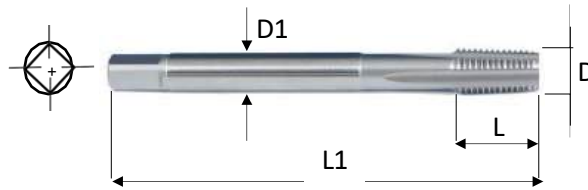


151978


Unid:mm

HSSE

DIN
5156



C
2-3P




CÓDIGO	ROSCA-HILOS	D	D1	L	L1	☐	TALADRADO	
0628	BSPT 1/8-28h	9,73	7	15	90	5,0	8,30	*
1419	BSPT 1/4-19h	13,16	11	19	100	9,0	11,00	*
1819	BSPT 3/8-19h	16,66	12	21	100	9,0	14,50	*
2214	BSPT 1/2-14h	20,95	16	26	125	12,0	18,10	*
2614	BSPT 5/8-14h	22,91	18	36	140	19,0	21,00	*
3014	BSPT 3/4-14h	26,44	20	28	140	16,0	23,50	*
3214	BSPT 7/8-14h	30,20	22	36	160	18,0	28,25	*
3411	BSPT 1-11h	33,25	25	33	160	20,0	29,60	*

MACHOS PARA ROSCAR A MÁQUINA

BSPP

- **Ejecución:** HSSE, DIN 374, con corte inicial forma C.
- Rosca cilíndrica inglesa para tubo.

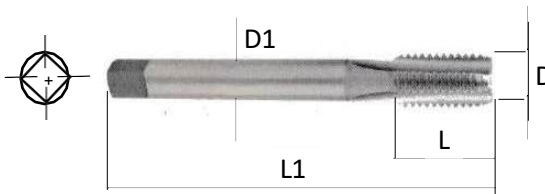


151977

Unid:mm

HSSE

DIN
374



C
2-3P

CÓDIGO	ROSCA-HILOS	D	D1	L	L1	☐	
0628	BSPP 1/8-28h	9,73	7	16	90	5,5	*
1419	BSPP 1/4-19h	13,16	11	22	100	9,0	*
1819	BSPP 3/8-19h	16,66	12	22	100	9,0	*
2214	BSPP 1/2-14h	20,95	16	25	125	12,0	*
3014	BSPP 3/4-14h	26,44	20	28	140	16,0	*
3411	BSPP 1-11h	33,25	25	30	160	20,0	*

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225	HB225 ~325	HRc30~45	HRc 45 ~55	HRc 55~							

- Consulten plazo de entrega.

© : Excelente

○ : Bueno