


MACHOS PARA ROSCAR A MÁQUINA

BSF

- **Ejecución:** HSSE, DIN 5156, con corte inicial forma C.

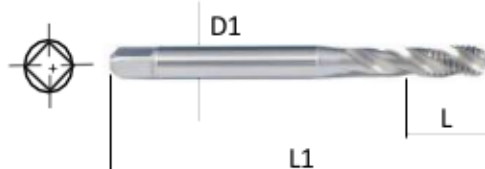


DIN 5156

151953

Unid: mm


HSSE

DIN
5156



C
2-3P

Tol
ISO 228



CÓDIGO	ROSCA-HILOS	D1	L	L1	☑	TALADRADO	
1032	BSF 3/16-32h	3,5	16	70	2,7	4,00	*
1426	BSF 1/4-26h	4,5	17	80	3,4	5,20	*
1622	BSF 5/16-22h	6,0	20	90	4,9	6,60	*
1820	BSF 3/8-20h	7,0	22	100	5,5	8,10	*
2018	BSF 7/16-18h	8,0	22	100	6,2	9,50	*
2216	BSF 1/2-16h	9,0	24	110	7,0	11,00	*
2416	BSF 9/16-16h	11,0	25	110	9,0	12,50	*
2614	BSF 5/8-14h	12,0	27	110	9,0	14,00	*
3012	BSF 3/4-12h	14,0	30	125	11,0	16,50	*
3211	BSF 7/8-11h	18,0	32	140	14,5	19,50	*
3410	BSF 1"-10h	18,0	36	160	14,5	22,50	*

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
-HB225 ◎	HB225-325	HRc30-45	HRc 45-55	HRc 55-							