


MACHOS PARA ROSCAR A MÁQUINA

MF


- **Ejecución:** HSSE, DIN 40430, con corte inicial forma C.
- Rosca métrica fina para tubo de conducción eléctrica en 60423.

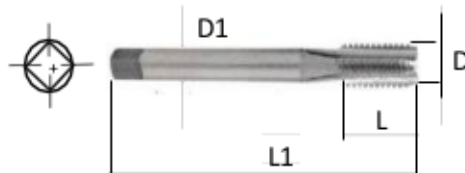

151984

Unid: mm

HSSE

DIN
374C
2-3PTol
6H

CÓDIGO	ROSCA-PASO	D	D1	L	L1	☑	TALADRADO	
1215	MF 12 x 1,50	12,0	9	22	100	7,0	10,50	*
1615	MF 16 x 1,50	16,0	12	22	100	9,0	14,05	*
2015	MF 20 x 1,50	20,0	16	25	125	12,0	18,50	*
2515	MF 25 x 1,50	25,0	18	28	140	14,5	23,50	*
3215	MF 32 x 1,50	32,0	22	28	150	18,0	30,50	*
4015	MF 40 x 1,50	40,0	32	30	170	24,0	38,50	*
5015	MF 50 x 1,50	50,0	36	32	190	29,0	48,50	*

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
-HB225	HB225 -325	HRc30-45	HRc 45 -55	HRc 55-							