


MACHOS PARA ROSCAR A MÁQUINA

NPSF

- **Ejecución:** HSSE, DIN 374, con corte inicial forma C.
- Rosca AMERICANA.
- Macho unitario.
- Rosca para tubo americana cónica estanca.

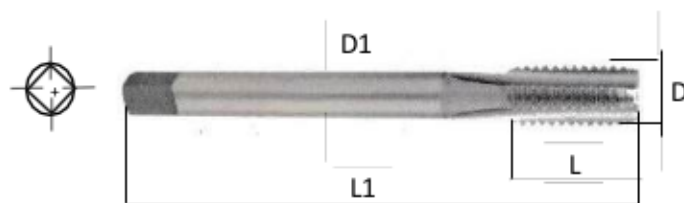


151982

Unid:mm

HSSE

DIN 374



C 2-3P



CÓDIGO	ROSCA-HILO	D	D1	L	L1	☑	TALADRADO	
0627	NPSF 1/8-27h	10,05	7	16	90	5,5	8,75	*
1418	NPSF 1/4-18h	13,33	11	22	100	9,0	11,30	*
1818	NPSF 3/8-18h	16,78	12	22	100	9,0	16,78	*
2214	NPSF 1/2-14h	20,87	16	25	125	12,0	20,87	*
3014	NPSF 3/4-14h	26,23	20	28	140	16,0	26,23	*

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
-HB225 ©	HB225 -325	HRc30-45	HRc 45 -55	HRc 55-							