



MACHOS PARA ROSCAR A MÁQUINA

PG

- **Ejecución:** HSSE, DIN 40430, con corte inicial forma C.
- Rosca para tubo de conducción eléctrica.

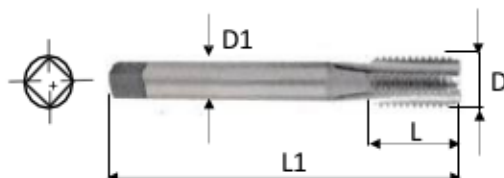

HSSE

DIN
40430C
2-3P

151985

Unid: mm

CÓDIGO	ROSCA-HILOS	D	D1	L	L1	☑	TALADRADO	
0720	PG 7-20h	12,5	9	22	100	7,0	11,50	*
0918	PG 9-18h	15,2	12	22	100	9,0	14,00	*
1118	PG 11-18h	18,6	14	25	110	11,0	17,25	*
1318	PG 13,5-18h	20,4	16	25	125	12,0	19,00	*
1618	PG 16-18h	22,5	18	25	125	14,5	21,25	*
2116	PG 21-16h	28,3	22	28	150	18,0	27,00	*
2916	PG 29-16h	37,0	28	30	170	22,0	35,50	*
3616	PG 36-16h	47,0	36	32	190	29,0	45,50	*
4216	PG 42-16h	54,0	40	32	190	32,0	52,50	*
4816	PG 48-16h	59,3	45	36	220	35,0	58,00	*