
YE-X1EH24 METRIC



YG X1-EH

FINE-FINISHING SOLID CARBIDE END MILLS FOR HIGH HARDENED STEEL


- Highest Accuracy for all Semi/Fine-Finishing application challenges
- Extensive Portfolio perfectly serving the Die&Mold Industry needs
- Latest Substrate and Coating Technology for predictive and extraordinary Tool Life

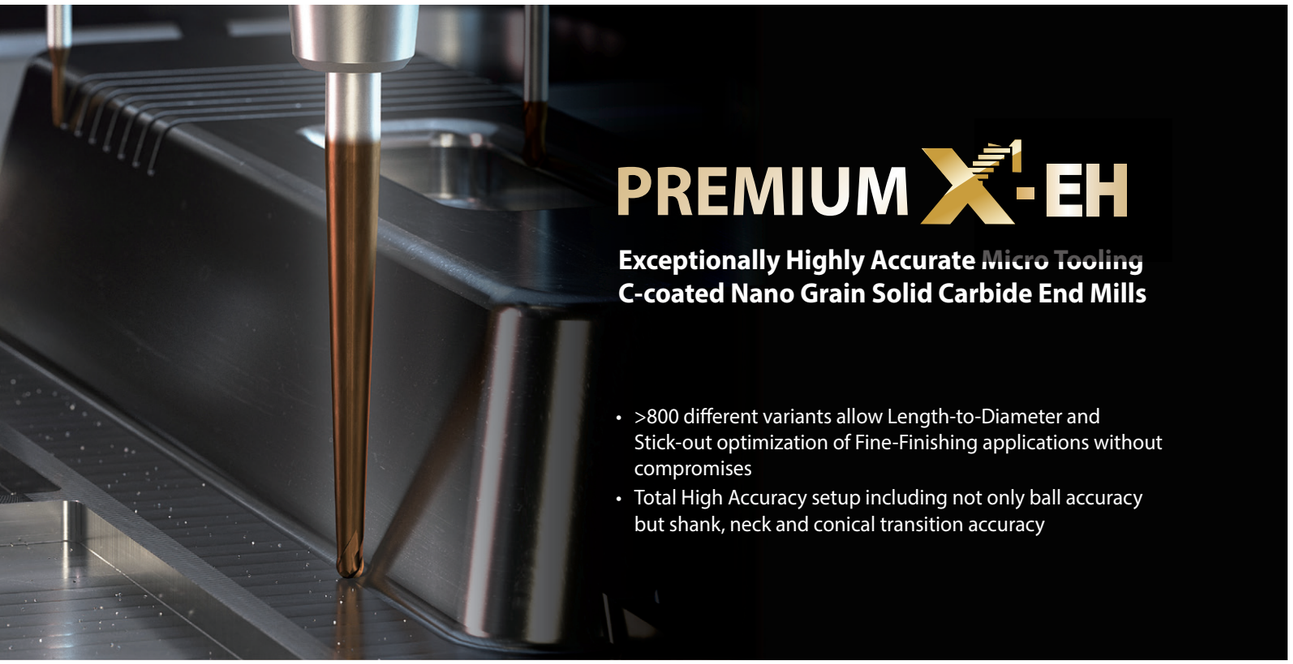

PREMIUM X1-EH

Exceptionally Highly Accurate Micro Tooling C-coated Nano Grain Solid Carbide End Mills

- >800 different variants allow Length-to-Diameter and Stick-out optimization of Fine-Finishing applications without compromises
- Total High Accuracy setup including not only ball accuracy but shank, neck and conical transition accuracy

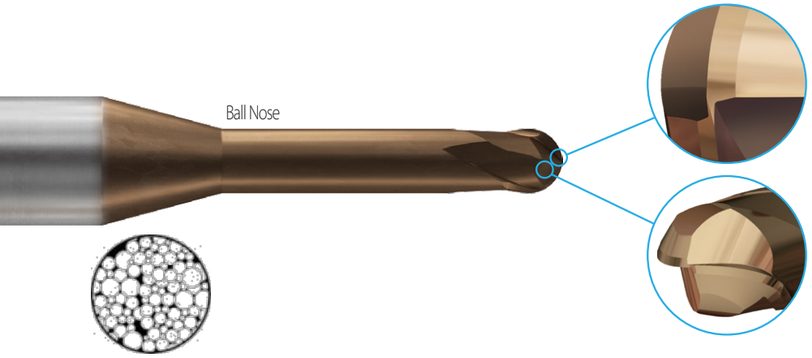

Ball Nose Gash Transition NEW

▶ Optimized transition from end mill center to flute for improved chip flow.

Reinforced Back Relief NEW

▶ Strengthened cutting edge design for greater stability while not interfering with chip flow.

Raw Material

▶ Newly developed fine-grain nanostructure substrate for improved thermal shock stability and higher hardness.

Special High Technology Coating NEW


▶ Excellent wear and heat resistance with improved thermal shock stability.
The nanolayer structure prevents the propagation of microcracks and coating elasticity promotes increased tool life.


Corner Geometries

▶ YG-1's High performance corner geometries, including corner radius, for longer tool life in high-hardness machining.


Edge Preparation

▶ Optimal edge preparation applied to prevent chipping and achieve excellent surface finishes with longer tool life in high speed machining.

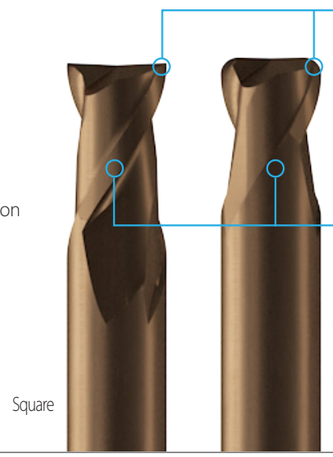

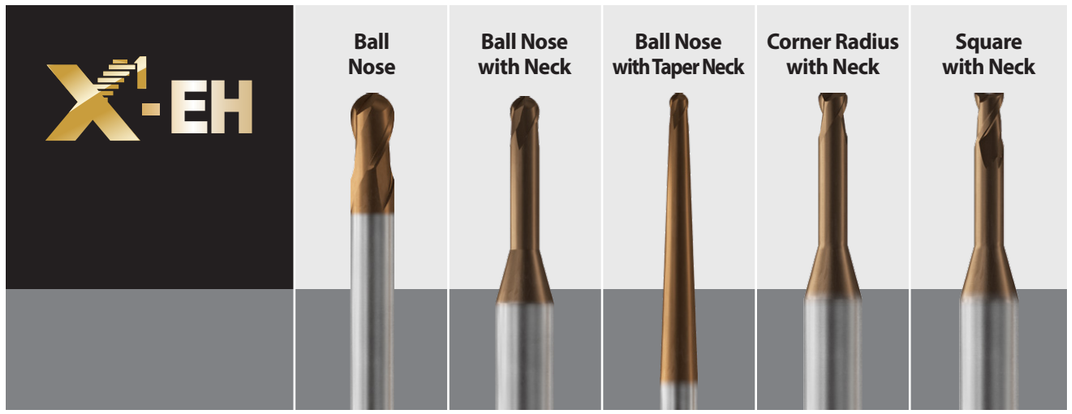

Cutting Portion Accuracy

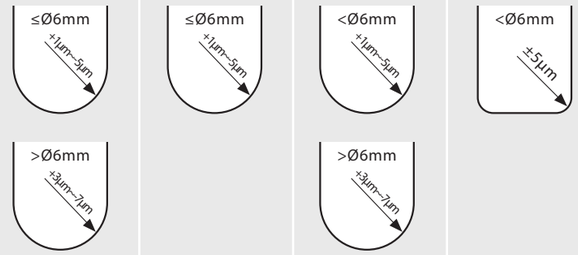


Shank Accuracy

Size	Shank Dia. Tolerance
up to Ø6	h4
over Ø6	h5

Coating	Coating Color	Coating Type	Hardness (Hv)	Max. Usage Temperature (°C)	Friction Coefficient (dry)	Coating Thickness (μm)	General Information
C- Coating	Reddish Brown	Si-based	3,900	1,000	0.40	0.5 ~ 3.0	• Improved Hardness and Toughness • High Thermal Stability and Oxidation Resistance • Nanolayer Structure prevents Propagation of Microcracks • Extra-hard Surface with Good Anti-Friction Properties and a Low Tendency to Stick to the Machined Workpiece Material

GUIDE TO ICONS

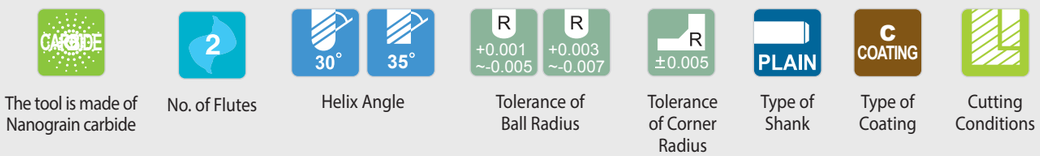


The tool is made of Nanograin carbide | No. of Flutes | Helix Angle | Tolerance of Ball Radius | Tolerance of Corner Radius | Type of Shank | Type of Coating | Cutting Conditions

CASE STUDY

TEST I Profiling application


Ø3(R1.5) 2 Flute Ball Nose

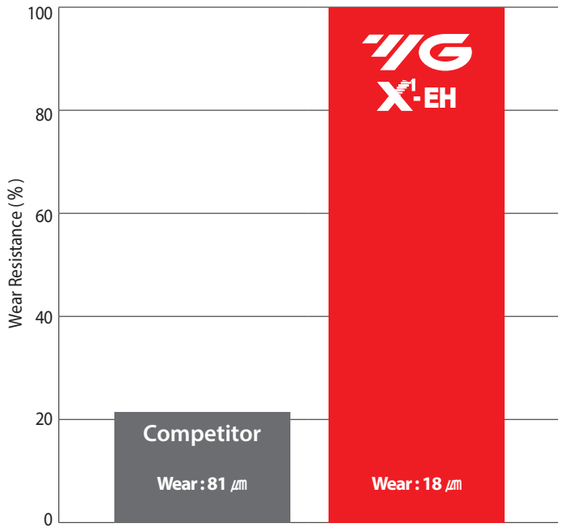

Cutting Condition (Profiling)


Tool	Ø3(R1.5) × Ø6 × 2.5(6) × 60
Work Material	- DIN : 1.2379 - JIS : SKD11(HRc63) - AISI : D2
R.P.M (rev./min.)	21,000 rev./min.
Feed (mm/min.)	2,800 mm/min.
Milling Depth (mm)	0.06mm (0.02xD) (Axial Depth) 0.15mm (0.05xD) (Radial Depth)
Coolant	Oil Mist
Machine	Machining Center

Total Milling Length : 248m

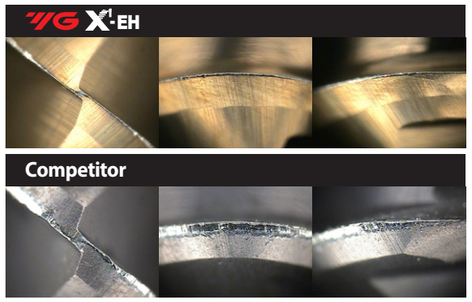

TEST II Side Cutting application


Ø6 2 Flute Square

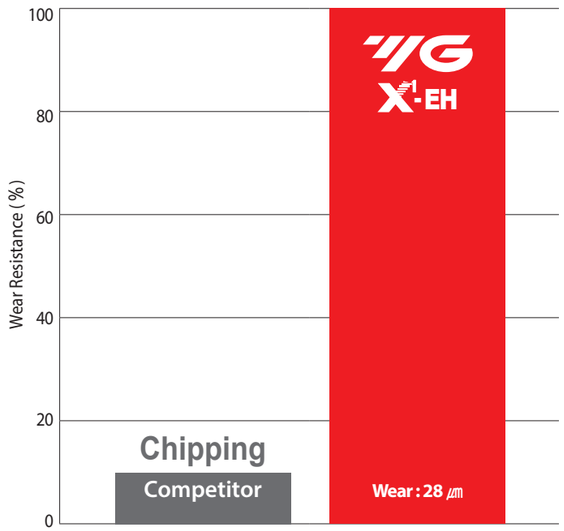

Cutting Condition (Side Cutting)

Tool	Ø6 × Ø6 × 15 × 50
Work Material	- DIN : 1.2379 - JIS : SKD11(HRc63) - AISI : D2
R.P.M (rev./min.)	4200 rev./min.
Feed (mm/min.)	255 mm/min.
Milling Depth (mm)	6mm (1.0xD) (Axial Depth) 0.18mm (0.03xD) (Radial Depth)
Coolant	Oil Mist
Machine	Machining Center


Total Milling Length : 2m

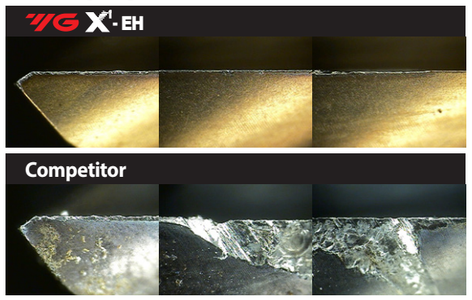

· Phone: +82-32-526-0909, www.yg1.kr, E-mail: yg1@yg1.kr

TEST III Profiling application


Ø3(R1.5) 2 Flute Ball Nose

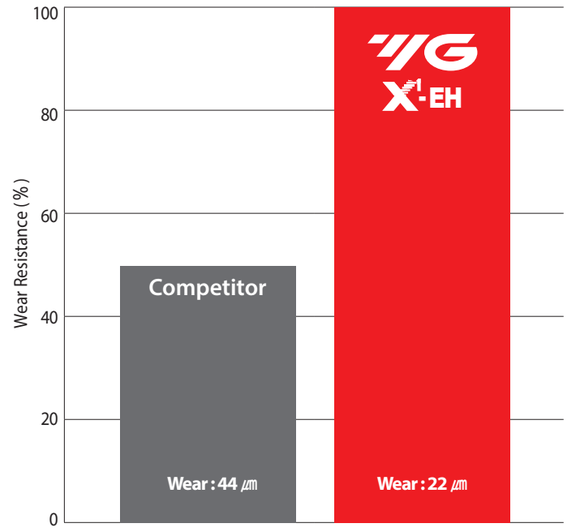

Cutting Condition (Profiling)


Tool	Ø3(R1.5) × Ø6 × 2.5(6) × 60
Work Material	- DIN : X30Cr13 - JIS : STAVAX(HRc52) - AISI : 420
R.P.M (rev./min.)	26,500 rev./min.
Feed (mm/min.)	4,000 mm/min.
Milling Depth (mm)	0.06mm (0.02xD) (Axial Depth) 0.15mm (0.05xD) (Radial Depth)
Coolant	Oil Mist
Machine	Machining Center

Total Milling length : 620m

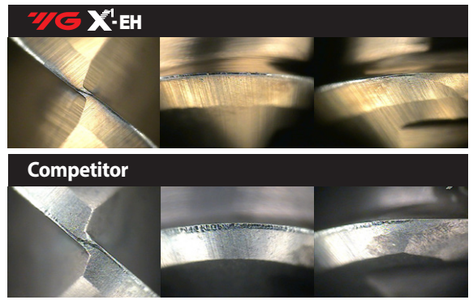

TEST IV Face Milling application


Ø0.6(R0.3) 2 Flute Ball Nose

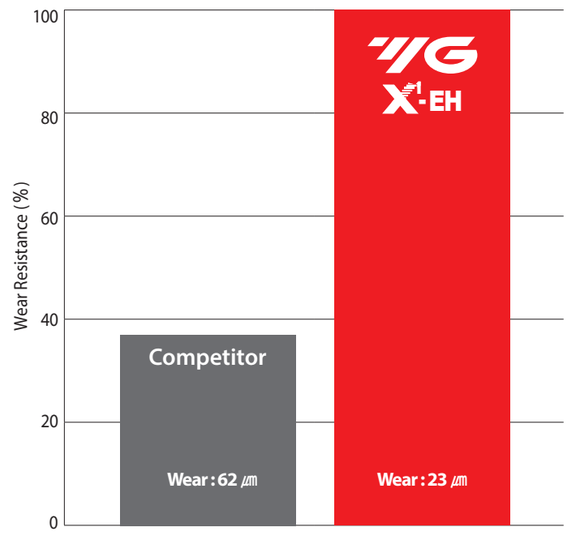

Cutting Condition (Face Milling)

Tool	Ø0.6(R0.3) × Ø4 × 0.45(1) × 45
Work Material	- DIN : X30Cr13 - JIS : STAVAX(HRc52) - AISI : 420
R.P.M (rev./min.)	40,000 rev./min.
Feed (mm/min.)	1,400 mm/min.
Milling Depth (mm)	0.05mm (0.08xD) (Axial Depth) 0.1mm (0.16xD) (Radial Depth)
Coolant	Oil Mist
Machine	Machining Center

Total Milling length : 80m

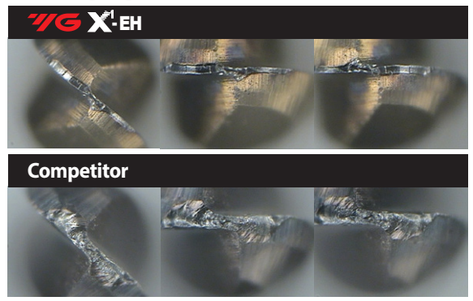

· Phone: +82-32-526-0909, www.yg1.kr, E-mail: yg1@yg1.kr

SELECTION GUIDE

METRIC

C-COATED SOLID CARBIDE


X1-EH END MILLS


Please visit globalyg1.com/mat for material search

Recommended cutting conditions : p41-62

◎ : Excellent ○ : Good

SERIES	HPI90	HPI91	HPI92	HPI89	HPI88
FLUTE	2	2	2	2	2
HELIX ANGLE	30°	30°	30°	35°	35°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS	SQUARE
SIZE MIN	R0.05	R0.05	R0.05	D0.2	D0.1
SIZE MAX	R10.0	R3.0	R6.0	D3.0	D6.0
PAGE	8	9	19	28	35
	-	RIB PROCESSING	TAPER NECK	RIB PROCESSING	RIB PROCESSING
	C-Coating	C-Coating	C-Coating	C-Coating	C-Coating





ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc					
P	1	Non-alloy steel	About 0.15% C	Annealed	125						1
	2		About 0.45% C	Annealed	190	13					2
	3		About 0.45% C	Quenched & tempered	250	25					3
	4		About 0.75% C	Annealed	270	28					4
	5		About 0.75% C	Quenched & tempered	300	32	○	○	○	○	5
	6	Low alloy steel		Annealed	180	10					6
	7			Quenched & tempered	275	29					7
	8			Quenched & tempered	300	32	○	○	○	○	8
	9			Quenched & tempered	350	38	○	○	○	○	9
	10	High alloyed steel, and tool steel		Annealed	200	15					10
	11.1			Quenched & Tempered	325	35	○	○	○	○	11.1
	11.2			Quenched & Tempered	409	44	○	○	○	○	11.2
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15					12
	13		Martensitic	Quenched & Tempered	240	23					13
	14.1			Austenitic	180	10					14.1
	14.2			PH Stainless Steel	180	10					14.2
K	15	Grey cast iron	Pearlitic / ferritic		180	10					15
	16		Pearlitic (Martensitic)		260	26					16
	17	Nodular cast iron	Ferritic		160	3					17
	18		Pearlitic		250	25					18
	19	Malleable cast iron	Ferritic		130						19
	20		Pearlitic		230	21					20
N	21	Aluminum-wrought alloy	Not Curable		60						21
	22		Curable	Hardened	100						22
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75						23
	24		≤ 12% Si, Curable	Hardened	90						24
	25		> 12% Si, Not Curable		130						25
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110						26
	27		CuZn, CuSnZn (Brass)		90						27
	28		CuSn, lead-free copper and electrolytic copper		100						28
	29.1	Non Metallic Materials	Duroplastic								29.1
	29.2		GRAPHITE								29.2
	29.3		CFRP, GFRP								29.3
	30		Rubber, Wood, etc.								30
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15					31
	32			Cured	280	30					32
	33		Ni or Co Based	Annealed	250	25					33
	34			Cured	350	38					34
	35			Cast	320	34					35
	36	Titanium Alloys	Pure Titanium		400 Rm						36
	37		Alpha + Beta Alloys	Hardened	1050 Rm						37
H	38.1	Hardened steel		Hardened	421-469	45-49	◎	◎	◎	◎	38.1
	38.2			Hardened	481-560	50-55	◎	◎	◎	◎	38.2
	39.1			Hardened	577-654	56-60	◎	◎	◎	◎	39.1
	39.2			Hardened	670-739	61-65	◎	◎	◎	◎	39.2
	39.3			Hardened		66-70	◎	◎	◎	◎	39.3
	40	Chilled Cast Iron		Cast	400	42	○	○	○	○	40
	41	Hardened Cast Iron		Hardened	550	55	◎	◎	◎	◎	41

Scan QR Code to See Catalogue

DIE & MOLD



C-COATED SOLID CARBIDE END MILLS

2 FLUTE BALL NOSE


SERIES

PLAIN SHANK **HPI90**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining







CARBIDE | 2 | 30° | R +0.001 ~-0.005 | R +0.003 ~-0.007 | PLAIN | C COATING

R0.05~R3 R4~R10

P. 41

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D_1	D_2	L_1	L_2
HPI90001	R0.05	**0.1**	4	0.1	50
HPI900015	R0.075	**0.15**	4	0.15	50
HPI90002	R0.1	**0.2**	4	0.2	50
HPI90003	R0.15	**0.3**	4	0.3	50
HPI90004	R0.2	**0.4**	4	0.6	50
HPI90005	R0.25	**0.5**	4	0.8	50
HPI90006	R0.3	**0.6**	4	0.9	50
HPI90008	R0.4	**0.8**	4	1.2	50
HPI90010	R0.5	**1.0**	4	1.5	50
HPI90015	R0.75	**1.5**	4	2.3	50
HPI90020	R1.0	**2.0**	4	3	60
HPI90025	R1.25	**2.5**	6	3.8	60
HPI90030	R1.5	**3.0**	6	5	60
HPI90040	R2.0	**4.0**	4	6	70
HPI90901	R2.0	**4.0**	6	6	70
HPI90050	R2.5	**5.0**	6	8	70
HPI90060	R3.0	**6.0**	6	10	80
HPI90080	R4.0	**8.0**	8	12	100
HPI90100	R5.0	**10.0**	10	15	100
HPI90120	R6.0	**12.0**	12	18	110
HPI90160	R8.0	**16.0**	16	24	140
HPI90200	R10.0	**20.0**	20	30	160

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING


SERIES

PLAIN SHANK **HPI91**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



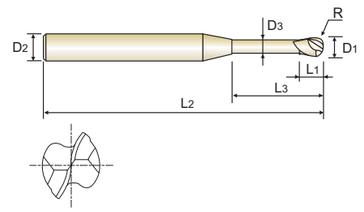



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | PLAIN | C COATING

P. 42-52

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI91001	R0.05	**0.1**	4	0.07	0.2	45	0.085	14.66	0.25	0.26	0.28	0.29	0.32
HPI91901	R0.05	**0.1**	4	0.07	0.3	45	0.085	14.47	0.36	0.37	0.39	0.41	0.47
HPI91902	R0.05	**0.1**	4	0.07	0.5	45	0.085	14.11	0.57	0.60	0.63	0.66	0.75
HPI910015	R0.075	**0.15**	4	0.1	0.3	45	0.135	14.51	0.36	0.37	0.39	0.41	0.46
HPI91903	R0.075	**0.15**	4	0.1	0.5	45	0.135	14.15	0.57	0.59	0.62	0.66	0.74
HPI91904	R0.075	**0.15**	4	0.1	1	45	0.135	13.31	1.09	1.15	1.21	1.28	1.45
HPI91002	R0.1	**0.2**	4	0.15	0.3	45	0.17	14.50	0.40	0.42	0.43	0.46	0.51
HPI91905	R0.1	**0.2**	4	0.15	0.5	45	0.17	14.13	0.61	0.64	0.67	0.70	0.79
HPI91906	R0.1	**0.2**	4	0.15	0.75	45	0.17	13.70	0.87	0.92	0.96	1.02	1.15
HPI91907	R0.1	**0.2**	4	0.15	1	45	0.17	13.29	1.14	1.19	1.26	1.33	1.50
HPI91908	R0.1	**0.2**	4	0.15	1	50	0.17	13.29	1.14	1.19	1.26	1.33	1.50
HPI91909	R0.1	**0.2**	4	0.15	1.25	45	0.17	12.90	1.40	1.47	1.55	1.64	1.86
HPI91910	R0.1	**0.2**	4	0.15	1.5	45	0.17	12.53	1.66	1.75	1.84	1.95	2.21
HPI91911	R0.1	**0.2**	4	0.15	1.75	45	0.17	12.19	1.93	2.03	2.14	2.26	2.57
HPI91912	R0.1	**0.2**	4	0.15	2	45	0.17	11.86	2.19	2.30	2.43	2.58	2.92
HPI91913	R0.1	**0.2**	4	0.15	2.5	45	0.17	11.26	2.71	2.86	3.02	3.20	3.64
HPI91914	R0.1	**0.2**	4	0.15	3	45	0.17	10.71	3.24	3.41	3.61	3.82	4.35
HPI91915	R0.1	**0.2**	4	0.2	0.5	35	0.17	14.13	0.61	0.64	0.67	0.70	0.79
HPI91916	R0.1	**0.2**	4	0.2	0.5	50	0.17	14.13	0.61	0.64	0.67	0.70	0.79
HPI91917	R0.1	**0.2**	6	0.2	0.5	50	0.17	14.42	0.61	0.64	0.67	0.70	0.79
HPI91003	R0.15	**0.3**	4	0.2	0.5	45	0.27	14.20	0.61	0.63	0.66	0.69	0.77
HPI91918	R0.15	**0.3**	4	0.2	0.6	45	0.27	14.02	0.71	0.74	0.78	0.82	0.91
HPI91919	R0.15	**0.3**	4	0.2	0.75	45	0.27	13.75	0.87	0.91	0.95	1.00	1.12
HPI91920	R0.15	**0.3**	4	0.2	1	45	0.27	13.33	1.13	1.19	1.25	1.32	1.48
HPI91921	R0.15	**0.3**	4	0.2	1.25	45	0.27	12.93	1.40	1.47	1.54	1.63	1.84
HPI91922	R0.15	**0.3**	4	0.2	1.5	45	0.27	12.55	1.66	1.74	1.84	1.94	2.19

NEXT PAGE ▶

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING


SERIES

PLAIN SHANK **HPI91**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



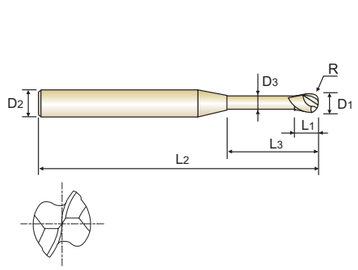



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | PLAIN | C COATING

P. 42-52

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI91923	R0.15	**0.3**	4	0.2	1.75	45	0.27	12.19	1.92	2.02	2.13	2.25	2.55
HPI91924	R0.15	**0.3**	4	0.2	2	45	0.27	11.86	2.19	2.30	2.42	2.56	2.90
HPI91925	R0.15	**0.3**	4	0.2	2.25	45	0.27	11.54	2.45	2.58	2.72	2.87	3.26
HPI91926	R0.15	**0.3**	4	0.2	2.5	45	0.27	11.24	2.71	2.85	3.01	3.19	3.61
HPI91927	R0.15	**0.3**	4	0.2	3	45	0.27	10.68	3.24	3.41	3.60	3.81	4.33
HPI91928	R0.15	**0.3**	4	0.2	3.5	45	0.27	10.17	3.76	3.96	4.18	4.43	5.04
HPI91929	R0.15	**0.3**	4	0.2	4	45	0.27	9.71	4.29	4.52	4.77	5.06	5.75
HPI91930	R0.15	**0.3**	6	0.2	1.5	50	0.27	13.31	1.66	1.74	1.84	1.94	2.19
HPI91004	R0.2	**0.4**	4	0.3	0.5	45	0.37	14.28	0.61	0.63	0.65	0.68	0.75
HPI91931	R0.2	**0.4**	4	0.3	0.8	45	0.37	13.72	0.92	0.96	1.00	1.05	1.17
HPI91932	R0.2	**0.4**	4	0.3	1	45	0.37	13.37	1.13	1.18	1.24	1.30	1.46
HPI91933	R0.2	**0.4**	4	0.3	1.5	45	0.37	12.57	1.66	1.74	1.83	1.93	2.17
HPI91934	R0.2	**0.4**	4	0.3	2	45	0.37	11.86	2.18	2.29	2.41	2.55	2.88
HPI91935	R0.2	**0.4**	4	0.3	2.5	45	0.37	11.22	2.71	2.85	3.00	3.17	3.59
HPI91936	R0.2	**0.4**	4	0.3	3	45	0.37	10.65	3.24	3.40	3.59	3.80	4.31
HPI91937	R0.2	**0.4**	4	0.3	3.5	45	0.37	10.13	3.76	3.96	4.18	4.42	5.02
HPI91938	R0.2	**0.4**	4	0.3	4	45	0.37	9.66	4.29	4.51	4.76	5.04	5.73
HPI91939	R0.2	**0.4**	4	0.3	4.5	45	0.37	9.23	4.81	5.07	5.35	5.67	6.44
HPI91940	R0.2	**0.4**	4	0.3	5	45	0.37	8.84	5.34	5.62	5.94	6.29	7.15
HPI91941	R0.2	**0.4**	4	0.3	6	45	0.37	8.15	6.39	6.73	7.11	7.54	8.57
HPI91942	R0.2	**0.4**	4	0.4	1	35	0.37	13.37	1.13	1.18	1.24	1.30	1.46
HPI91943	R0.2	**0.4**	4	0.4	1	50	0.37	13.37	1.13	1.18	1.24	1.30	1.46
HPI91944	R0.2	**0.4**	6	0.3	1	50	0.37	13.91	1.13	1.18	1.24	1.30	1.46
HPI91945	R0.2	**0.4**	6	0.3	2	50	0.37	12.82	2.18	2.29	2.41	2.55	2.88
HPI91946	R0.2	**0.4**	6	0.4	1	50	0.37	13.91	1.13	1.18	1.24	1.30	1.46
HPI91005	R0.25	**0.5**	4	0.35	1	45	0.45	13.35	1.19	1.24	1.30	1.36	1.52

NEXT PAGE ▶

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING


SERIES

PLAIN SHANK HPI91

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



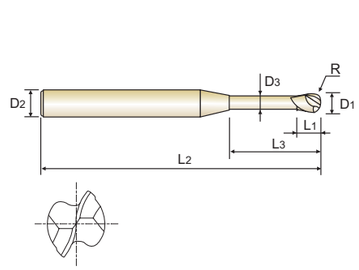



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | PLAIN | C COATING

P. 42-52

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI91947	R0.25	**0.5**	4	0.35	1.5	45	0.45	12.53	1.71	1.79	1.88	1.99	2.23
HPI91948	R0.25	**0.5**	4	0.35	2	45	0.45	11.80	2.24	2.35	2.47	2.61	2.94
HPI91949	R0.25	**0.5**	4	0.35	2.5	45	0.45	11.16	2.77	2.90	3.06	3.23	3.65
HPI91950	R0.25	**0.5**	4	0.35	3	45	0.45	10.57	3.29	3.46	3.65	3.86	4.36
HPI91951	R0.25	**0.5**	4	0.35	3.5	45	0.45	10.05	3.82	4.01	4.23	4.48	5.08
HPI91952	R0.25	**0.5**	4	0.35	4	45	0.45	9.57	4.34	4.57	4.82	5.10	5.79
HPI91953	R0.25	**0.5**	4	0.35	4.5	45	0.45	9.14	4.87	5.12	5.41	5.73	6.50
HPI91954	R0.25	**0.5**	4	0.35	5	45	0.45	8.75	5.40	5.68	5.99	6.35	7.21
HPI91955	R0.25	**0.5**	4	0.35	5.5	45	0.45	8.38	5.92	6.23	6.58	6.97	7.92
HPI91956	R0.25	**0.5**	4	0.35	6	45	0.45	8.05	6.45	6.79	7.17	7.60	8.63
HPI91957	R0.25	**0.5**	4	0.35	8	45	0.45	6.94	8.55	9.01	9.52	10.09	11.43
HPI91958	R0.25	**0.5**	4	0.35	10	45	0.45	6.10	10.66	11.23	11.87	12.58	13.76
HPI91959	R0.25	**0.5**	4	0.5	1.25	50	0.45	12.93	1.45	1.52	1.59	1.67	1.87
HPI91960	R0.25	**0.5**	6	0.5	1.25	50	0.45	13.61	1.45	1.52	1.59	1.67	1.87
HPI91006	R0.3	**0.6**	4	0.45	1	45	0.55	13.40	1.19	1.23	1.29	1.35	1.50
HPI91961	R0.3	**0.6**	4	0.45	1.5	45	0.55	12.55	1.71	1.79	1.88	1.97	2.21
HPI91962	R0.3	**0.6**	4	0.45	2	45	0.55	11.80	2.24	2.34	2.46	2.60	2.92
HPI91963	R0.3	**0.6**	4	0.45	2.5	45	0.55	11.13	2.76	2.90	3.05	3.22	3.63
HPI91964	R0.3	**0.6**	4	0.45	3	45	0.55	10.54	3.29	3.45	3.64	3.84	4.34
HPI91965	R0.3	**0.6**	4	0.45	3.5	45	0.55	10.00	3.82	4.01	4.22	4.47	5.06
HPI91966	R0.3	**0.6**	4	0.45	4	45	0.55	9.52	4.34	4.56	4.81	5.09	5.77
HPI91967	R0.3	**0.6**	4	0.45	4.5	45	0.55	9.08	4.87	5.12	5.40	5.71	6.48
HPI91968	R0.3	**0.6**	4	0.45	5	45	0.55	8.68	5.39	5.67	5.99	6.34	7.19
HPI91969	R0.3	**0.6**	4	0.45	5.5	45	0.55	8.31	5.92	6.23	6.57	6.96	7.90
HPI91970	R0.3	**0.6**	4	0.45	6	45	0.55	7.97	6.45	6.78	7.16	7.58	8.61
HPI91971	R0.3	**0.6**	4	0.45	7	45	0.55	7.37	7.50	7.89	8.34	8.83	10.04

NEXT PAGE ▶

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING


SERIES

PLAIN SHANK **HPI91**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining







CARBIDE | 2 | 30° | R +0.001 ~-0.005 | PLAIN | C COATING | P. 42-52

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI91972	R0.3	**0.6**	4	0.45	8	45	0.55	6.86	8.55	9.00	9.51	10.08	11.36
HPI91973	R0.3	**0.6**	4	0.45	9	45	0.55	6.41	9.60	10.11	10.68	11.33	12.53
HPI91974	R0.3	**0.6**	4	0.45	10	45	0.55	6.01	10.65	11.22	11.86	12.57	13.70
HPI91975	R0.3	**0.6**	4	0.45	12	45	0.55	5.35	12.76	13.44	14.21	15.07	16.03
HPI91976	R0.3	**0.6**	4	0.6	1.5	35	0.55	12.55	1.71	1.79	1.88	1.97	2.21
HPI91977	R0.3	**0.6**	4	0.6	1.5	50	0.55	12.55	1.71	1.79	1.88	1.97	2.21
HPI91978	R0.3	**0.6**	6	0.45	2	50	0.55	12.81	2.24	2.34	2.46	2.60	2.92
HPI91979	R0.3	**0.6**	6	0.45	3	50	0.55	11.85	3.29	3.45	3.64	3.84	4.34
HPI91980	R0.3	**0.6**	6	0.45	4	50	0.55	11.02	4.34	4.56	4.81	5.09	5.77
HPI91981	R0.3	**0.6**	6	0.6	1.5	50	0.55	13.36	1.71	1.79	1.88	1.97	2.21
HPI91007	R0.35	**0.7**	4	0.5	2	45	0.65	11.80	2.24	2.34	2.45	2.58	2.90
HPI91982	R0.35	**0.7**	4	0.5	4	45	0.65	9.46	4.34	4.56	4.80	5.08	5.75
HPI91983	R0.35	**0.7**	4	0.5	6	45	0.65	7.89	6.44	6.78	7.15	7.57	8.59
HPI91984	R0.35	**0.7**	4	0.5	8	45	0.65	6.77	8.55	9.00	9.50	10.07	11.29
HPI91008	R0.4	**0.8**	4	0.6	2	45	0.75	11.79	2.23	2.33	2.45	2.57	2.88
HPI91985	R0.4	**0.8**	4	0.6	3	45	0.75	10.46	3.28	3.44	3.62	3.82	4.30
HPI91986	R0.4	**0.8**	4	0.6	4	45	0.75	9.40	4.34	4.55	4.79	5.07	5.72
HPI91987	R0.4	**0.8**	4	0.6	5	45	0.75	8.53	5.39	5.66	5.97	6.31	7.15
HPI91988	R0.4	**0.8**	4	0.6	6	45	0.75	7.81	6.44	6.77	7.14	7.56	8.57
HPI91989	R0.4	**0.8**	4	0.6	7	45	0.75	7.20	7.49	7.88	8.32	8.81	9.99
HPI91990	R0.4	**0.8**	4	0.6	8	45	0.75	6.68	8.54	8.99	9.49	10.05	11.23
HPI91991	R0.4	**0.8**	4	0.6	10	45	0.75	5.83	10.65	11.21	11.84	12.55	13.56
HPI91992	R0.4	**0.8**	4	0.6	12	45	0.75	5.18	12.75	13.43	14.19	15.04	15.90
HPI91993	R0.4	**0.8**	4	0.8	2	35	0.75	11.79	2.23	2.33	2.45	2.57	2.88
HPI91994	R0.4	**0.8**	4	0.8	2	50	0.75	11.79	2.23	2.33	2.45	2.57	2.88
HPI91995	R0.4	**0.8**	6	0.6	2	50	0.75	12.85	2.23	2.33	2.45	2.57	2.88

NEXT PAGE ▶

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING


SERIES

PLAIN SHANK HPI91

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining







CARBIDE | 2 | 30° | R +0.001 ~-0.005 | PLAIN | C COATING | P. 42-52

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI91996	R0.4	**0.8**	6	0.8	2	50	0.75	12.85	2.23	2.33	2.45	2.57	2.88
HPI91009	R0.45	**0.9**	4	0.65	2	45	0.85	11.79	2.23	2.33	2.44	2.56	2.86
HPI91997	R0.45	**0.9**	4	0.65	4	45	0.85	9.34	4.33	4.55	4.79	5.05	5.70
HPI91998	R0.45	**0.9**	4	0.65	6	45	0.85	7.72	6.44	6.77	7.13	7.55	8.55
HPI91999	R0.45	**0.9**	4	0.65	8	45	0.85	6.58	8.54	8.99	9.48	10.04	11.16
HPI91010	R0.5	**1.0**	4	0.75	2	45	0.95	11.78	2.23	2.32	2.43	2.55	2.84
HPI91801	R0.5	**1.0**	4	0.75	2.5	45	0.95	11.04	2.75	2.88	3.02	3.17	3.55
HPI91802	R0.5	**1.0**	4	0.75	3	45	0.95	10.38	3.28	3.43	3.60	3.79	4.26
HPI91803	R0.5	**1.0**	4	0.75	4	45	0.95	9.27	4.33	4.54	4.78	5.04	5.68
HPI91804	R0.5	**1.0**	4	0.75	5	45	0.95	8.37	5.38	5.65	5.95	6.29	7.10
HPI91805	R0.5	**1.0**	4	0.75	6	45	0.95	7.63	6.44	6.76	7.13	7.54	8.53
HPI91806	R0.5	**1.0**	4	0.75	7	45	0.95	7.01	7.49	7.87	8.30	8.78	9.93
HPI91807	R0.5	**1.0**	4	0.75	8	45	0.95	6.49	8.54	8.98	9.47	10.03	11.10
HPI91808	R0.5	**1.0**	4	0.75	9	45	0.95	6.03	9.59	10.09	10.65	11.28	12.26
HPI91809	R0.5	**1.0**	4	0.75	10	45	0.95	5.64	10.64	11.20	11.82	12.52	13.43
HPI91810	R0.5	**1.0**	4	0.75	12	45	0.95	4.99	12.75	13.42	14.17	14.96	15.77
HPI91811	R0.5	**1.0**	4	0.75	13	45	0.95	4.71	13.80	14.53	15.35	16.06	16.94
HPI91812	R0.5	**1.0**	4	0.75	14	50	0.95	4.47	14.85	15.64	16.52	17.17	18.10
HPI91813	R0.5	**1.0**	4	0.75	16	50	0.95	4.05	16.96	17.86	18.87	19.38	20.44
HPI91814	R0.5	**1.0**	4	0.75	18	55	0.95	3.70	19.06	20.08	21.05	21.59	22.78
HPI91815	R0.5	**1.0**	4	0.75	20	55	0.95	3.41	21.16	22.30	23.20	23.81	25.11
HPI91816	R0.5	**1.0**	4	1	2.5	40	0.95	11.04	2.75	2.88	3.02	3.17	3.55
HPI91817	R0.5	**1.0**	4	1	2.5	50	0.95	11.04	2.75	2.88	3.02	3.17	3.55
HPI91818	R0.5	**1.0**	6	0.75	3	50	0.95	11.84	3.28	3.43	3.60	3.79	4.26
HPI91819	R0.5	**1.0**	6	0.75	4	50	0.95	10.95	4.33	4.54	4.78	5.04	5.68
HPI91820	R0.5	**1.0**	6	0.75	5	50	0.95	10.18	5.38	5.65	5.95	6.29	7.10

NEXT PAGE ▶

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎


C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING

SERIES PLAIN SHANK **HPI91**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



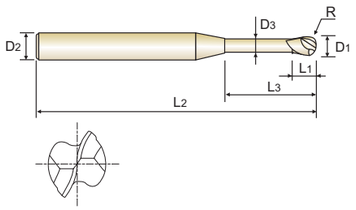



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | PLAIN | C COATING | P. 42-52

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI91821	R0.5	**1.0**	6	0.75	6	50	0.95	9.51	6.44	6.76	7.13	7.54	8.53
HPI91822	R0.5	**1.0**	6	0.75	7	50	0.95	8.92	7.49	7.87	8.30	8.78	9.95
HPI91823	R0.5	**1.0**	6	0.75	8	50	0.95	8.40	8.54	8.98	9.47	10.03	11.37
HPI91824	R0.5	**1.0**	6	0.75	10	50	0.95	7.53	10.64	11.20	11.82	12.52	14.22
HPI91825	R0.5	**1.0**	6	0.75	22	60	0.95	4.62	23.27	24.52	25.92	27.11	28.60
HPI91826	R0.5	**1.0**	6	1	2.5	50	0.95	12.34	2.75	2.88	3.02	3.17	3.55
HPI91012	R0.6	**1.2**	4	0.9	2.4	45	1.15	11.13	2.56	2.63	2.70	2.78	2.95
HPI91827	R0.6	**1.2**	4	0.9	4	45	1.15	9.12	4.21	4.34	4.47	4.62	4.94
HPI91828	R0.6	**1.2**	4	0.9	6	45	1.15	7.44	6.28	6.48	6.69	6.92	7.43
HPI91829	R0.6	**1.2**	4	0.9	8	45	1.15	6.28	8.35	8.62	8.90	9.22	9.92
HPI91830	R0.6	**1.2**	4	0.9	10	45	1.15	5.43	10.41	10.75	11.12	11.52	12.40
HPI91831	R0.6	**1.2**	4	0.9	12	45	1.15	4.79	12.48	12.89	13.34	13.82	14.89
HPI91832	R0.6	**1.2**	4	0.9	14	50	1.15	4.28	14.55	15.03	15.55	16.12	17.37
HPI91833	R0.6	**1.2**	4	0.9	16	50	1.15	3.87	16.61	17.17	17.77	18.42	19.86
HPI91834	R0.6	**1.2**	4	1.2	3	40	1.15	10.28	3.18	3.27	3.36	3.47	3.70
HPI91014	R0.7	**1.4**	4	1	8	45	1.35	6.06	8.34	8.61	8.89	9.20	9.89
HPI91835	R0.7	**1.4**	4	1	12	50	1.35	4.58	12.48	12.89	13.33	13.80	14.86
HPI91836	R0.7	**1.4**	4	1	16	50	1.35	3.67	16.61	17.17	17.76	18.40	19.84
HPI91015	R0.75	**1.5**	4	1.1	3	45	1.45	10.11	3.17	3.26	3.35	3.44	3.66
HPI91837	R0.75	**1.5**	4	1.1	4	45	1.45	8.87	4.21	4.33	4.46	4.59	4.91
HPI91838	R0.75	**1.5**	4	1.1	6	45	1.45	7.12	6.27	6.47	6.67	6.89	7.39
HPI91839	R0.75	**1.5**	4	1.1	8	45	1.45	5.94	8.34	8.61	8.89	9.19	9.88
HPI91840	R0.75	**1.5**	4	1.1	10	45	1.45	5.10	10.41	10.74	11.11	11.49	12.37
HPI91841	R0.75	**1.5**	4	1.1	12	45	1.45	4.46	12.48	12.88	13.32	13.79	14.85
HPI91842	R0.75	**1.5**	4	1.1	14	50	1.45	3.97	14.54	15.02	15.54	16.09	17.34
HPI91843	R0.75	**1.5**	4	1.1	16	50	1.45	3.57	16.61	17.16	17.76	18.39	19.82

NEXT PAGE ▶

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎


C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING

SERIES PLAIN SHANK HPI91

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



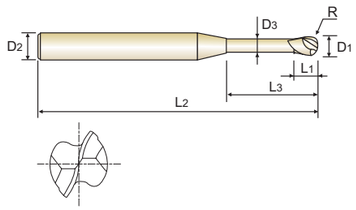



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | PLAIN | C COATING | P. 42-52

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI91844	R0.75	**1.5**	4	1.1	18	55	1.45	3.25	18.68	19.30	19.97	20.69	22.31
HPI91845	R0.75	**1.5**	4	1.1	20	55	1.45	2.98	20.74	21.44	22.19	22.99	-
HPI91846	R0.75	**1.5**	4	1.1	22	60	1.45	2.75	22.81	23.58	24.41	25.29	-
HPI91847	R0.75	**1.5**	4	1.1	30	70	1.45	2.10	31.08	32.14	33.27	34.49	-
HPI91848	R0.75	**1.5**	4	1.5	3.8	40	1.45	9.10	4.00	4.11	4.23	4.36	4.66
HPI91849	R0.75	**1.5**	4	1.5	3.8	50	1.45	9.10	4.00	4.11	4.23	4.36	4.66
HPI91850	R0.75	**1.5**	6	1.1	6	50	1.45	9.30	6.27	6.47	6.67	6.89	7.39
HPI91851	R0.75	**1.5**	6	1.1	8	50	1.45	8.13	8.34	8.61	8.89	9.19	9.88
HPI91852	R0.75	**1.5**	6	1.5	3.8	50	1.45	11.03	4.00	4.11	4.23	4.36	4.66
HPI91016	R0.8	**1.6**	4	1.2	8	45	1.55	5.82	8.34	8.60	8.88	9.19	9.87
HPI91853	R0.8	**1.6**	4	1.2	12	45	1.55	4.35	12.47	12.88	13.32	13.79	14.84
HPI91854	R0.8	**1.6**	4	1.2	16	50	1.55	3.47	16.61	17.16	17.75	18.39	19.81
HPI91855	R0.8	**1.6**	4	1.2	20	55	1.55	2.89	20.74	21.44	22.18	22.98	-
HPI91020	R1.0	**2.0**	4	1.5	3	45	1.95	9.74	3.16	3.24	3.32	3.41	3.60
HPI91856	R1.0	**2.0**	4	1.5	4	45	1.95	8.34	4.20	4.31	4.43	4.56	4.85
HPI91857	R1.0	**2.0**	4	1.5	6	45	1.95	6.46	6.26	6.45	6.64	6.86	7.33
HPI91858	R1.0	**2.0**	4	1.5	8	45	1.95	5.28	8.33	8.59	8.86	9.16	9.82
HPI91859	R1.0	**2.0**	4	1.5	10	45	1.95	4.46	10.40	10.73	11.08	11.46	12.30
HPI91860	R1.0	**2.0**	4	1.5	12	45	1.95	3.86	12.47	12.87	13.29	13.76	14.79
HPI91861	R1.0	**2.0**	4	1.5	13	45	1.95	3.62	13.50	13.94	14.40	14.91	16.03
HPI91862	R1.0	**2.0**	4	1.5	14	50	1.95	3.40	14.53	15.01	15.51	16.06	17.28
HPI91863	R1.0	**2.0**	4	1.5	16	50	1.95	3.04	16.60	17.15	17.73	18.36	19.76
HPI91864	R1.0	**2.0**	4	1.5	18	55	1.95	2.75	18.67	19.28	19.94	20.65	-
HPI91865	R1.0	**2.0**	4	1.5	20	55	1.95	2.51	20.74	21.42	22.16	22.95	-
HPI91866	R1.0	**2.0**	4	1.5	22	60	1.95	2.31	22.80	23.56	24.38	25.25	-
HPI91867	R1.0	**2.0**	4	1.5	25	65	1.95	2.06	25.90	26.77	27.70	28.70	-

NEXT PAGE ▶

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎


C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING

SERIES PLAIN SHANK **HPI91**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



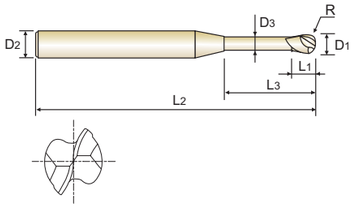



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | PLAIN | C COATING | P. 42-52

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI91868	R1.0	**2.0**	4	1.5	30	70	1.95	1.74	31.07	32.12	33.24	-	-
HPI91869	R1.0	**2.0**	4	1.5	35	70	1.95	1.51	36.24	37.47	38.79	-	-
HPI91870	R1.0	**2.0**	4	1.5	40	90	1.95	1.34	41.41	42.82	-	-	-
HPI91871	R1.0	**2.0**	4	2	5	40	1.95	7.28	5.23	5.38	5.54	5.71	6.09
HPI91872	R1.0	**2.0**	4	2	5	50	1.95	7.28	5.23	5.38	5.54	5.71	6.09
HPI91873	R1.0	**2.0**	6	1.5	4	50	1.95	10.73	4.20	4.31	4.43	4.56	4.85
HPI91874	R1.0	**2.0**	6	1.5	6	50	1.95	9.05	6.26	6.45	6.64	6.86	7.33
HPI91875	R1.0	**2.0**	6	1.5	8	50	1.95	7.82	8.33	8.59	8.86	9.16	9.82
HPI91876	R1.0	**2.0**	6	1.5	10	50	1.95	6.89	10.40	10.73	11.08	11.46	12.30
HPI91877	R1.0	**2.0**	6	1.5	16	60	1.95	5.07	16.60	17.15	17.73	18.36	19.76
HPI91878	R1.0	**2.0**	6	1.5	25	65	1.95	3.63	25.90	26.77	27.70	28.70	30.95
HPI91879	R1.0	**2.0**	6	2	5	50	1.95	9.82	5.23	5.38	5.54	5.71	6.09
HPI91025	R1.25	**2.5**	4	2.3	6	45	2.4	5.54	6.35	6.53	6.72	6.93	7.39
HPI91880	R1.25	**2.5**	4	2.3	8	45	2.4	4.41	8.42	8.67	8.94	9.23	9.87
HPI91881	R1.25	**2.5**	4	2.3	10	45	2.4	3.66	10.49	10.81	11.15	11.53	12.36
HPI91882	R1.25	**2.5**	4	2.3	15	50	2.4	2.57	15.66	16.16	16.70	17.28	-
HPI91883	R1.25	**2.5**	4	2.3	20	55	2.4	1.98	20.82	21.51	22.24	-	-
HPI91884	R1.25	**2.5**	4	2.3	25	65	2.4	1.61	25.99	26.85	27.78	-	-
HPI91885	R1.25	**2.5**	4	2.3	30	70	2.4	1.35	31.16	32.20	-	-	-
HPI91886	R1.25	**2.5**	4	2.3	35	70	2.4	1.17	36.33	37.55	-	-	-
HPI91030	R1.5	**3.0**	4	3	8	40	2.85	3.31	8.51	8.75	9.01	9.30	9.93
HPI91887	R1.5	**3.0**	6	2.5	6	60	2.85	8.22	6.44	6.61	6.80	7.00	7.44
HPI91888	R1.5	**3.0**	6	2.5	8	60	2.85	6.91	8.51	8.75	9.01	9.30	9.93
HPI91889	R1.5	**3.0**	6	2.5	10	60	2.85	5.96	10.58	10.89	11.23	11.60	12.41
HPI91890	R1.5	**3.0**	6	2.5	12	60	2.85	5.23	12.64	13.03	13.45	13.90	14.90
HPI91891	R1.5	**3.0**	6	2.5	14	60	2.85	4.67	14.71	15.17	15.66	16.20	17.39

NEXT PAGE ▶

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎


C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING

SERIES PLAIN SHANK HPI91

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



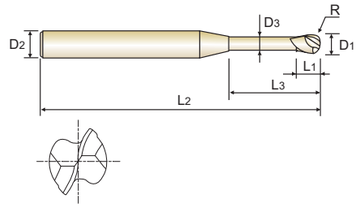



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | PLAIN | C COATING | P. 42-52

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI91892	R1.5	**3.0**	6	2.5	16	60	2.85	4.21	16.78	17.31	17.88	18.49	19.87
HPI91893	R1.5	**3.0**	6	2.5	20	65	2.85	3.52	20.91	21.59	22.31	23.09	24.85
HPI91894	R1.5	**3.0**	6	2.5	25	65	2.85	2.92	26.08	26.94	27.86	28.84	-
HPI91895	R1.5	**3.0**	6	2.5	30	70	2.85	2.50	31.25	32.29	33.40	34.59	-
HPI91896	R1.5	**3.0**	6	2.5	35	80	2.85	2.18	36.42	37.63	38.94	40.34	-
HPI91897	R1.5	**3.0**	6	2.5	40	90	2.85	1.94	41.59	42.98	44.48	-	-
HPI91898	R1.5	**3.0**	6	3	8	60	2.85	6.91	8.51	8.75	9.01	9.30	9.93
HPI91035	R1.75	**3.5**	6	2.8	15	60	3.35	3.93	15.74	16.22	16.75	17.31	18.57
HPI91899	R1.75	**3.5**	6	2.8	20	65	3.35	3.08	20.90	21.57	22.29	23.06	24.79
HPI91701	R1.75	**3.5**	6	2.8	25	65	3.35	2.54	26.07	26.92	27.83	28.81	-
HPI91702	R1.75	**3.5**	6	2.8	30	70	3.35	2.16	31.24	32.27	33.37	34.56	-
HPI91703	R1.75	**3.5**	6	2.8	35	80	3.35	1.87	36.41	37.62	38.91	-	-
HPI91704	R1.75	**3.5**	6	2.8	40	90	3.35	1.66	41.58	42.96	44.45	-	-
HPI91705	R1.75	**3.5**	6	2.8	45	90	3.35	1.49	46.75	48.31	-	-	-
HPI91040	R2.0	**4.0**	4	3	8	65	3.85	0.00	-	-	-	-	-
HPI91706	R2.0	**4.0**	6	3	8	65	3.85	5.70	8.49	8.72	8.96	9.22	9.81
HPI91707	R2.0	**4.0**	6	3	10	65	3.85	4.76	10.56	10.86	11.18	11.52	12.29
HPI91708	R2.0	**4.0**	6	3	12	65	3.85	4.08	12.63	13.00	13.39	13.82	14.78
HPI91709	R2.0	**4.0**	6	3	14	65	3.85	3.57	14.69	15.14	15.61	16.12	17.27
HPI91710	R2.0	**4.0**	6	3	15	65	3.85	3.36	15.73	16.21	16.72	17.27	18.51
HPI91711	R2.0	**4.0**	6	3	20	65	3.85	2.60	20.90	21.55	22.26	23.02	-
HPI91712	R2.0	**4.0**	6	3	25	70	3.85	2.12	26.06	26.90	27.80	28.77	-
HPI91713	R2.0	**4.0**	6	3	30	70	3.85	1.79	31.23	32.25	33.34	-	-
HPI91714	R2.0	**4.0**	6	3	35	80	3.85	1.55	36.40	37.60	38.88	-	-
HPI91715	R2.0	**4.0**	6	3	40	85	3.85	1.36	41.57	42.95	-	-	-
HPI91716	R2.0	**4.0**	6	3	45	90	3.85	1.22	46.74	48.30	-	-	-

NEXT PAGE ▶

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING


SERIES

PLAIN SHANK **HPI91**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



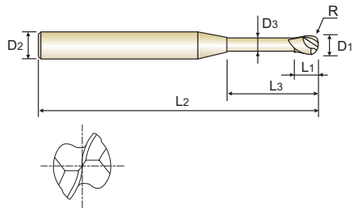



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | PLAIN | C COATING | P. 42-52

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI91717	R2.0	**4.0**	6	3	50	100	3.85	1.10	51.91	53.64	-	-	-
HPI91718	R2.0	**4.0**	6	4	10	40	3.85	4.76	10.56	10.86	11.18	11.52	12.29
HPI91719	R2.0	**4.0**	6	4	10	60	3.85	4.76	10.56	10.86	11.18	11.52	12.29
HPI91050	R2.5	**5.0**	6	3.5	10	70	4.85	2.97	10.54	10.82	11.12	11.45	-
HPI91720	R2.5	**5.0**	6	3.5	15	70	4.85	1.96	15.71	16.17	16.66	-	-
HPI91721	R2.5	**5.0**	6	3.5	20	70	4.85	1.46	20.88	21.52	-	-	-
HPI91722	R2.5	**5.0**	6	3.5	25	70	4.85	1.16	26.05	26.87	-	-	-
HPI91723	R2.5	**5.0**	6	3.5	30	80	4.85	0.97	31.22	-	-	-	-
HPI91724	R2.5	**5.0**	6	3.5	40	90	4.85	0.72	41.55	-	-	-	-
HPI91725	R2.5	**5.0**	6	5	12	45	4.85	2.46	12.61	12.96	13.34	13.75	-
HPI91726	R2.5	**5.0**	6	5	12	60	4.85	2.46	12.61	12.96	13.34	13.75	-
HPI91060	R3.0	**6.0**	6	6	10	70	5.85	0.00	-	-	-	-	-
HPI91727	R3.0	**6.0**	6	6	15	45	5.85	0.00	-	-	-	-	-
HPI91728	R3.0	**6.0**	6	6	15	60	5.85	0.00	-	-	-	-	-
HPI91729	R3.0	**6.0**	6	6	15	70	5.85	0.00	-	-	-	-	-
HPI91730	R3.0	**6.0**	6	6	20	70	5.85	0.00	-	-	-	-	-
HPI91731	R3.0	**6.0**	6	6	25	70	5.85	0.00	-	-	-	-	-
HPI91732	R3.0	**6.0**	6	6	30	80	5.85	0.00	-	-	-	-	-
HPI91733	R3.0	**6.0**	6	6	35	85	5.85	0.00	-	-	-	-	-
HPI91734	R3.0	**6.0**	6	6	40	90	5.85	0.00	-	-	-	-	-
HPI91735	R3.0	**6.0**	6	6	50	120	5.85	0.00	-	-	-	-	-
HPI91736	R3.0	**6.0**	6	6	60	120	5.85	0.00	-	-	-	-	-

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK


SERIES

PLAIN SHANK **HPI92**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



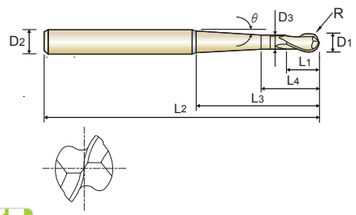



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | R +0.003 ~-0.007 | PLAIN | C COATING | P. 42-52

R0.05~R3 R3.5~R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Neck Taper Angle(°)	Under Neck Parallel Length	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3	θ°	L_4		0.5°	1°	1.5°	2°	3°
HPI92001	R0.05	**0.1**	4	0.07	0.5	50	0.085	**3°**	0.17	14.23	0.37	0.44	0.51	0.53	0.56
HPI92901	R0.05	**0.1**	4	0.07	0.75	50	0.085	**3°**	0.17	13.88	0.37	0.44	0.58	0.76	0.81
HPI920015	R0.075	**0.15**	4	0.1	1	50	0.135	**3°**	0.25	13.55	0.46	0.55	0.71	1.00	1.08
HPI92902	R0.075	**0.15**	4	0.1	1.5	50	0.135	**3°**	0.25	12.92	0.46	0.55	0.71	1.03	1.58
HPI92002	R0.1	**0.2**	4	0.15	1.5	50	0.17	**0.5°**	0.35	12.59	1.57	1.62	1.67	1.73	1.86
HPI92903	R0.1	**0.2**	4	0.15	1.5	50	0.17	**1°**	0.35	12.64	1.53	1.58	1.63	1.69	1.82
HPI92904	R0.1	**0.2**	4	0.15	1.5	50	0.17	**1.5°**	0.35	12.69	1.33	1.54	1.59	1.64	1.77
HPI92905	R0.1	**0.2**	4	0.15	1.5	50	0.17	**2°**	0.35	12.75	1.01	1.46	1.55	1.60	1.72
HPI92906	R0.1	**0.2**	4	0.15	2	50	0.17	**0.5°**	0.35	11.93	2.07	2.13	2.21	2.29	2.46
HPI92907	R0.1	**0.2**	4	0.15	2	50	0.17	**1°**	0.35	12.00	2.01	2.08	2.15	2.23	2.40
HPI92908	R0.1	**0.2**	4	0.15	2	50	0.17	**1.5°**	0.35	12.07	1.33	2.02	2.09	2.16	2.33
HPI92909	R0.1	**0.2**	4	0.15	2	50	0.17	**2°**	0.35	12.14	1.01	1.46	2.03	2.10	2.26
HPI92910	R0.1	**0.2**	4	0.15	3	50	0.17	**3°**	0.35	11.28	0.74	0.90	1.17	1.71	3.13
HPI92911	R0.1	**0.2**	4	0.15	3	50	0.17	**5°**	0.35	11.69	0.57	0.63	0.70	0.80	1.15
HPI92912	R0.1	**0.2**	4	0.15	5	50	0.17	**3°**	0.35	9.68	0.74	0.90	1.17	1.71	5.13
HPI92913	R0.1	**0.2**	4	0.15	5	50	0.17	**5°**	0.35	10.23	0.57	0.63	0.70	0.80	1.15
HPI92003	R0.15	**0.3**	4	0.2	2	50	0.27	**0.5°**	0.5	11.92	2.07	2.14	2.21	2.29	2.46
HPI92914	R0.15	**0.3**	4	0.2	2	50	0.27	**1°**	0.5	11.99	2.02	2.08	2.15	2.23	2.40
HPI92915	R0.15	**0.3**	4	0.2	2	50	0.27	**1.5°**	0.5	12.05	1.53	2.03	2.10	2.17	2.34
HPI92916	R0.15	**0.3**	4	0.2	2	50	0.27	**2°**	0.5	12.12	1.19	1.71	2.05	2.12	2.28
HPI92917	R0.15	**0.3**	4	0.2	2	50	0.27	**3°**	0.5	12.26	0.91	1.10	1.42	2.00	2.15
HPI92918	R0.15	**0.3**	4	0.2	3	50	0.27	**0.5°**	0.5	10.77	3.07	3.17	3.28	3.40	3.66
HPI92919	R0.15	**0.3**	4	0.2	3	50	0.27	**1°**	0.5	10.86	2.57	3.08	3.19	3.30	3.56
HPI92920	R0.15	**0.3**	4	0.2	3	50	0.27	**1.5°**	0.5	10.95	1.53	2.92	3.10	3.21	3.46
HPI92921	R0.15	**0.3**	4	0.2	3	50	0.27	**2°**	0.5	11.04	1.19	1.71	3.01	3.12	3.36
HPI92922	R0.15	**0.3**	4	0.2	3	50	0.27	**3°**	0.5	11.23	0.91	1.10	1.42	2.06	3.15

NEXT PAGE ▶

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK


SERIES

PLAIN SHANK **HPI92**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



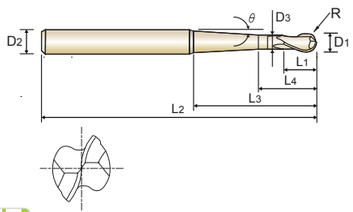



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | R +0.003 ~-0.007 | PLAIN | C COATING | P. 42-52

R0.05~R3 R3.5~R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Neck Taper Angle(°)	Under Neck Parallel Length	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D1	D2	L1	L3	L2	D3	θ°	L4		0.5°	1°	1.5°	2°	3°
HPI92923	R0.15	**0.3**	4	0.2	3	50	0.27	**5°**	0.5	11.62	0.73	0.80	0.89	1.02	1.45
HPI92924	R0.15	**0.3**	4	0.2	5	50	0.27	**3°**	0.5	9.61	0.91	1.10	1.42	2.06	5.15
HPI92925	R0.15	**0.3**	4	0.2	5	50	0.27	**5°**	0.5	10.14	0.73	0.80	0.89	1.02	1.45
HPI92926	R0.15	**0.3**	4	0.2	7	50	0.27	**3°**	0.5	8.39	0.91	1.10	1.42	2.06	7.15
HPI92927	R0.15	**0.3**	4	0.2	7	50	0.27	**5°**	0.5	8.99	0.73	0.80	0.89	1.02	1.45
HPI92004	R0.2	**0.4**	4	0.3	3	50	0.37	**0.5°**	0.7	10.73	3.07	3.17	3.28	3.40	3.66
HPI92928	R0.2	**0.4**	4	0.3	3	50	0.37	**1°**	0.7	10.81	2.92	3.09	3.20	3.31	3.56
HPI92929	R0.2	**0.4**	4	0.3	3	50	0.37	**1.5°**	0.7	10.90	1.81	3.01	3.12	3.23	3.47
HPI92930	R0.2	**0.4**	4	0.3	3	50	0.37	**2°**	0.7	10.98	1.44	2.06	3.03	3.14	3.38
HPI92931	R0.2	**0.4**	4	0.3	4	50	0.37	**0.5°**	0.7	9.76	4.07	4.21	4.35	4.51	4.86
HPI92932	R0.2	**0.4**	4	0.3	4	50	0.37	**1°**	0.7	9.86	2.92	4.09	4.24	4.39	4.73
HPI92933	R0.2	**0.4**	4	0.3	4	50	0.37	**1.5°**	0.7	9.96	1.81	3.42	4.12	4.26	4.59
HPI92934	R0.2	**0.4**	4	0.3	4	50	0.37	**2°**	0.7	10.06	1.44	2.06	3.92	4.14	4.46
HPI92935	R0.2	**0.4**	4	0.3	5	50	0.37	**3°**	0.7	9.52	1.14	1.38	1.77	2.56	5.19
HPI92936	R0.2	**0.4**	4	0.3	5	50	0.37	**5°**	0.7	10.04	0.95	1.04	1.16	1.32	1.87
HPI92937	R0.2	**0.4**	4	0.3	6	50	0.37	**0.5°**	0.7	8.26	6.07	6.28	6.50	6.74	7.27
HPI92938	R0.2	**0.4**	4	0.3	6	50	0.37	**1°**	0.7	8.37	2.92	6.09	6.31	6.54	7.05
HPI92939	R0.2	**0.4**	4	0.3	6	50	0.37	**1.5°**	0.7	8.49	1.81	3.42	6.12	6.34	6.84
HPI92940	R0.2	**0.4**	4	0.3	6	50	0.37	**2°**	0.7	8.61	1.44	2.06	3.92	6.14	6.62
HPI92941	R0.2	**0.4**	4	0.3	7	50	0.37	**3°**	0.7	8.30	1.14	1.38	1.77	2.56	7.19
HPI92942	R0.2	**0.4**	4	0.3	7	50	0.37	**5°**	0.7	8.88	0.95	1.04	1.16	1.32	1.87
HPI92005	R0.25	**0.5**	4	0.35	4	50	0.45	**0.5°**	0.85	9.67	4.12	4.25	4.40	4.55	4.90
HPI92943	R0.25	**0.5**	4	0.35	4	50	0.45	**1°**	0.85	9.76	4.01	4.14	4.28	4.43	4.77
HPI92944	R0.25	**0.5**	4	0.35	4	50	0.45	**1.5°**	0.85	9.86	2.58	4.03	4.17	4.32	4.65
HPI92945	R0.25	**0.5**	4	0.35	4	50	0.45	**2°**	0.85	9.96	2.00	2.88	4.05	4.20	4.52
HPI92946	R0.25	**0.5**	4	0.35	5	50	0.45	**0.5°**	0.85	8.85	5.12	5.29	5.47	5.66	6.10

NEXT PAGE ▶

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK


SERIES

PLAIN SHANK HPI92

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



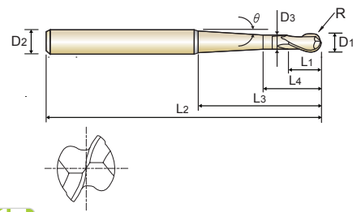



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | R +0.003 ~-0.007 | PLAIN | C COATING | P. 42-52

R0.05~R3 R3.5~R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Neck Taper Angle(°)	Under Neck Parallel Length	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D1	D2	L1	L3	L2	D3	θ°	L4		0.5°	1°	1.5°	2°	3°
HPI92947	R0.25	**0.5**	4	0.35	5	50	0.45	**1°**	0.85	8.96	4.31	5.14	5.32	5.51	5.93
HPI92948	R0.25	**0.5**	4	0.35	5	50	0.45	**1.5°**	0.85	9.06	2.58	4.91	5.17	5.35	5.77
HPI92949	R0.25	**0.5**	4	0.35	5	50	0.45	**2°**	0.85	9.18	2.00	2.88	5.02	5.20	5.60
HPI92006	R0.3	**0.6**	4	0.45	4	50	0.55	**0.5°**	1.05	9.61	4.12	4.25	4.40	4.55	4.90
HPI92950	R0.3	**0.6**	4	0.45	4	50	0.55	**1°**	1.05	9.70	4.02	4.15	4.29	4.44	4.78
HPI92951	R0.3	**0.6**	4	0.45	4	50	0.55	**1.5°**	1.05	9.79	2.86	4.05	4.18	4.33	4.66
HPI92952	R0.3	**0.6**	4	0.45	4	50	0.55	**3°**	1.05	10.08	1.77	2.14	2.75	3.98	4.30
HPI92953	R0.3	**0.6**	4	0.45	5	50	0.55	**0.5°**	1.05	8.78	5.12	5.29	5.47	5.66	6.10
HPI92954	R0.3	**0.6**	4	0.45	5	50	0.55	**1°**	1.05	8.88	4.66	5.15	5.33	5.52	5.94
HPI92955	R0.3	**0.6**	4	0.45	5	50	0.55	**1.5°**	1.05	8.98	2.86	5.01	5.18	5.37	5.78
HPI92956	R0.3	**0.6**	4	0.45	5	50	0.55	**2°**	1.05	9.09	2.25	3.23	5.04	5.22	5.62
HPI92957	R0.3	**0.6**	4	0.45	5	50	0.55	**3°**	1.05	9.31	1.77	2.14	2.75	3.98	5.30
HPI92958	R0.3	**0.6**	4	0.45	5	50	0.55	**5°**	1.05	9.79	1.45	1.59	1.78	2.02	2.88
HPI92959	R0.3	**0.6**	4	0.45	6	50	0.55	**0.5°**	1.05	8.08	6.12	6.32	6.54	6.78	7.30
HPI92960	R0.3	**0.6**	4	0.45	6	50	0.55	**1°**	1.05	8.19	4.66	6.15	6.36	6.59	7.10
HPI92961	R0.3	**0.6**	4	0.45	6	50	0.55	**1.5°**	1.05	8.30	2.86	5.41	6.18	6.41	6.90
HPI92962	R0.3	**0.6**	4	0.45	6	50	0.55	**2°**	1.05	8.41	2.25	3.23	6.01	6.22	6.70
HPI92963	R0.3	**0.6**	4	0.45	7	50	0.55	**3°**	1.05	8.08	1.77	2.14	2.75	3.98	7.30
HPI92964	R0.3	**0.6**	4	0.45	7	50	0.55	**5°**	1.05	8.63	1.45	1.59	1.78	2.02	2.88
HPI92965	R0.3	**0.6**	4	0.45	8	50	0.55	**0.5°**	1.05	6.97	8.12	8.39	8.69	9.00	9.71
HPI92966	R0.3	**0.6**	4	0.45	8	50	0.55	**1°**	1.05	7.08	4.66	8.15	8.44	8.74	9.43
HPI92967	R0.3	**0.6**	4	0.45	8	50	0.55	**1.5°**	1.05	7.20	2.86	5.41	8.18	8.48	9.14
HPI92968	R0.3	**0.6**	4	0.45	8	50	0.55	**2°**	1.05	7.32	2.25	3.23	6.16	8.22	8.86
HPI92008	R0.4	**0.8**	4	0.6	8	60	0.75	**0.5°**	1.4	6.78	8.13	8.40	8.69	9.00	9.70
HPI92969	R0.4	**0.8**	4	0.6	8	60	0.75	**1°**	1.4	6.89	5.26	8.17	8.45	8.75	9.43
HPI92970	R0.4	**0.8**	4	0.6	8	60	0.75	**1.5°**	1.4	7.01	3.33	6.26	8.21	8.50	9.16

NEXT PAGE ▶

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


SERIES


2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

PLAIN SHANK **HPI92**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



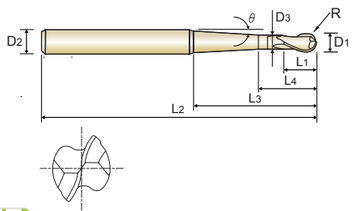



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | R +0.003 ~-0.007 | PLAIN | C COATING | P. 42-52

R0.05~R3 R3.5~R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Neck Taper Angle(°)	Under Neck Parallel Length	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D1	D2	L1	L3	L2	D3	θ°	L4		0.5°	1°	1.5°	2°	3°
HPI92971	R0.4	**0.8**	4	0.6	8	60	0.75	**2°**	1.4	7.12	2.69	3.83	7.26	8.26	8.89
HPI92972	R0.4	**0.8**	4	0.6	12	60	0.75	**0.5°**	1.4	5.28	12.13	12.54	12.98	13.45	14.51
HPI92973	R0.4	**0.8**	4	0.6	12	60	0.75	**1°**	1.4	5.38	5.26	12.17	12.59	13.05	14.08
HPI92974	R0.4	**0.8**	4	0.6	12	60	0.75	**1.5°**	1.4	5.50	3.33	6.26	12.21	12.65	13.65
HPI92975	R0.4	**0.8**	4	0.6	12	60	0.75	**2°**	1.4	5.61	2.69	3.83	7.26	12.26	13.22
HPI92010	R0.5	**1.0**	4	0.75	6	60	0.95	**0.5°**	2.75	7.71	6.17	6.37	6.58	6.81	7.32
HPI92976	R0.5	**1.0**	4	0.75	6	60	0.95	**1°**	2.75	7.78	6.06	6.26	6.46	6.69	7.19
HPI92977	R0.5	**1.0**	4	0.75	6	60	0.95	**1.5°**	2.75	7.85	5.31	6.14	6.35	6.57	7.06
HPI92978	R0.5	**1.0**	4	0.75	8	60	0.95	**0.5°**	2.75	6.57	8.17	8.44	8.73	9.03	9.73
HPI92979	R0.5	**1.0**	4	0.75	8	60	0.95	**1°**	2.75	6.66	7.86	8.26	8.54	8.84	9.51
HPI92980	R0.5	**1.0**	4	0.75	8	60	0.95	**1.5°**	2.75	6.75	5.31	8.07	8.35	8.64	9.30
HPI92981	R0.5	**1.0**	4	0.75	8	60	0.95	**2°**	2.75	6.84	4.45	6.43	8.16	8.44	9.09
HPI92982	R0.5	**1.0**	4	0.75	10	60	0.95	**0.5°**	2.75	5.73	10.17	10.51	10.87	11.26	12.13
HPI92983	R0.5	**1.0**	4	0.75	10	60	0.95	**1°**	2.75	5.82	7.86	10.26	10.61	10.99	11.84
HPI92984	R0.5	**1.0**	4	0.75	10	60	0.95	**1.5°**	2.75	5.91	5.31	10.00	10.35	10.72	11.55
HPI92985	R0.5	**1.0**	4	0.75	10	60	0.95	**2°**	2.75	6.01	4.45	6.43	10.09	10.44	11.25
HPI92986	R0.5	**1.0**	4	0.75	10	60	0.95	**3°**	2.75	6.22	3.77	4.59	5.95	8.67	10.66
HPI92987	R0.5	**1.0**	4	0.75	12	60	0.95	**0.5°**	2.75	5.08	12.17	12.58	13.02	13.48	14.54
HPI92988	R0.5	**1.0**	4	0.75	12	60	0.95	**1°**	2.75	5.17	7.86	12.26	12.68	13.14	14.16
HPI92989	R0.5	**1.0**	4	0.75	12	60	0.95	**1.5°**	2.75	5.26	5.31	10.11	12.35	12.79	13.79
HPI92990	R0.5	**1.0**	4	0.75	16	60	0.95	**0.5°**	2.75	4.13	16.17	16.72	17.30	17.93	19.35
HPI92991	R0.5	**1.0**	4	0.75	16	60	0.95	**1°**	2.75	4.22	7.86	16.26	16.83	17.44	18.81
HPI92992	R0.5	**1.0**	4	0.75	16	60	0.95	**1.5°**	2.75	4.31	5.31	10.11	16.35	16.94	18.28
HPI92993	R0.5	**1.0**	4	0.75	20	70	0.95	**0.5°**	2.75	3.49	20.17	20.86	21.59	22.38	24.16
HPI92994	R0.5	**1.0**	4	0.75	20	70	0.95	**1°**	2.75	3.57	7.86	20.26	20.97	21.74	23.46
HPI92995	R0.5	**1.0**	4	0.75	20	70	0.95	**1.5°**	2.75	3.65	5.31	10.11	20.35	21.09	22.76

NEXT PAGE ▶

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

◎ : Excellent ○ : Good

ISO	P													M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2		12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44		15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409		200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○										

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


SERIES


2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

PLAIN SHANK **HPI92**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



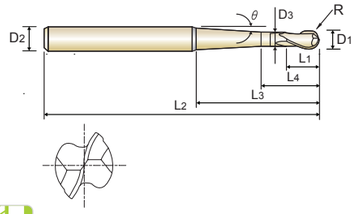



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | R +0.003 ~-0.007 | PLAIN | C COATING | P. 42-52

R0.05~R3 R3.5~R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Neck Taper Angle(°)	Under Neck Parallel Length	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D1	D2	L1	L3	L2	D3	θ°	L4		0.5°	1°	1.5°	2°	3°
HPI92996	R0.5	**1.0**	4	0.75	20	70	0.95	**2°**	2.75	3.74	4.45	6.43	12.36	20.44	22.06
HPI92997	R0.5	**1.0**	4	0.75	20	70	0.95	**3°**	2.75	3.93	3.77	4.59	5.95	8.67	20.66
HPI92998	R0.5	**1.0**	4	0.75	25	70	0.95	**0.5°**	2.75	2.91	25.17	26.03	26.95	27.95	-
HPI92999	R0.5	**1.0**	4	0.75	25	70	0.95	**1°**	2.75	2.99	7.86	25.26	26.15	27.11	-
HPI92801	R0.5	**1.0**	4	0.75	25	70	0.95	**1.5°**	2.75	3.06	5.31	10.11	25.35	26.28	28.37
HPI92802	R0.5	**1.0**	4	0.75	30	70	0.95	**0.5°**	2.75	2.50	30.17	31.21	32.31	33.51	-
HPI92803	R0.5	**1.0**	4	0.75	30	70	0.95	**1°**	2.75	2.57	7.86	30.26	31.33	32.49	-
HPI92804	R0.5	**1.0**	4	0.75	30	70	0.95	**1.5°**	2.75	2.64	5.31	10.11	30.35	31.47	-
HPI92805	R0.5	**1.0**	4	0.75	30	70	0.95	**2°**	2.75	2.71	4.45	6.43	12.36	30.44	-
HPI92896	R0.5	**1.0**	6	0.75	30	70	0.95	**3°**	2.75	4.26	3.77	4.59	5.95	8.67	30.66
HPI92015	R0.75	**1.5**	4	1.1	10	60	1.45	**0.5°**	3.1	5.18	10.18	10.50	10.86	11.24	12.09
HPI92806	R0.75	**1.5**	4	1.1	10	60	1.45	**1°**	3.1	5.27	8.31	10.26	10.61	10.98	11.81
HPI92807	R0.75	**1.5**	4	1.1	10	60	1.45	**1.5°**	3.1	5.36	5.71	10.02	10.36	10.72	11.53
HPI92808	R0.75	**1.5**	4	1.1	10	60	1.45	**2°**	3.1	5.45	4.84	6.88	10.11	10.46	11.25
HPI92809	R0.75	**1.5**	4	1.1	15	60	1.45	**0.5°**	3.1	3.84	15.18	15.68	16.22	16.80	18.10
HPI92810	R0.75	**1.5**	4	1.1	15	60	1.45	**1°**	3.1	3.92	8.31	15.26	15.79	16.35	17.62
HPI92811	R0.75	**1.5**	4	1.1	15	60	1.45	**1.5°**	3.1	4.01	5.71	10.66	15.36	15.91	17.14
HPI92812	R0.75	**1.5**	4	1.1	15	60	1.45	**2°**	3.1	4.10	4.84	6.88	13.01	15.46	16.65
HPI92813	R0.75	**1.5**	4	1.1	20	70	1.45	**0.5°**	3.1	3.05	20.18	20.85	21.58	22.36	24.11
HPI92814	R0.75	**1.5**	4	1.1	20	70	1.45	**1°**	3.1	3.12	8.31	20.26	20.97	21.73	23.43
HPI92815	R0.75	**1.5**	4	1.1	20	70	1.45	**1.5°**	3.1	3.20	5.71	10.66	20.36	21.09	22.74
HPI92816	R0.75	**1.5**	4	1.1	20	70	1.45	**2°**	3.1	3.28	4.84	6.88	13.01	20.46	22.06
HPI92817	R0.75	**1.5**	4	1.1	25	70	1.45	**0.5°**	3.1	2.53	25.18	26.03	26.94	27.92	-
HPI92818	R0.75	**1.5**	4	1.1	25	70	1.45	**1°**	3.1	2.59	8.31	25.26	26.15	27.10	-
HPI92819	R0.75	**1.5**	4	1.1	30	70	1.45	**0.5°**	3.1	2.16	30.18	31.20	32.30	33.48	-
HPI92820	R0.75	**1.5**	4	1.1	30	70	1.45	**1°**	3.1	2.22	8.31	30.26	31.33	32.48	-

NEXT PAGE ▶

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎


C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

SERIES PLAIN SHANK **HPI92**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



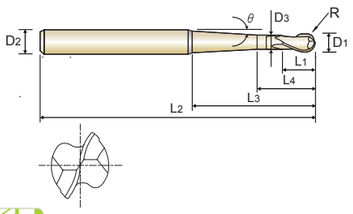



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | R +0.003 ~-0.007 | PLAIN | C COATING | P. 42-52

R0.05~R3 R3.5~R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Neck Taper Angle(°)	Under Neck Parallel Length	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3	θ°	L_4		0.5°	1°	1.5°	2°	3°
HPI92020	R1.0	**2.0**	4	1.5	12	60	1.95	**0.5°**	3.5	3.93	12.18	12.57	12.99	13.44	14.45
HPI92821	R1.0	**2.0**	4	1.5	12	60	1.95	**1°**	3.5	4.01	8.86	12.27	12.68	13.12	14.10
HPI92822	R1.0	**2.0**	4	1.5	12	60	1.95	**1.5°**	3.5	4.09	6.18	11.36	12.37	12.80	13.76
HPI92823	R1.0	**2.0**	4	1.5	12	60	1.95	**2°**	3.5	4.17	5.29	7.43	12.07	12.48	13.41
HPI92824	R1.0	**2.0**	4	1.5	16	60	1.95	**0.5°**	3.5	3.11	16.18	16.71	17.28	17.89	19.26
HPI92825	R1.0	**2.0**	4	1.5	16	60	1.95	**1°**	3.5	3.18	8.86	16.27	16.83	17.42	18.75
HPI92826	R1.0	**2.0**	4	1.5	16	60	1.95	**1.5°**	3.5	3.25	6.18	11.36	16.37	16.95	18.24
HPI92827	R1.0	**2.0**	4	1.5	16	60	1.95	**2°**	3.5	3.33	5.29	7.43	13.86	16.48	17.74
HPI92828	R1.0	**2.0**	4	1.5	20	70	1.95	**0.5°**	3.5	2.57	20.18	20.85	21.57	22.34	-
HPI92829	R1.0	**2.0**	4	1.5	20	70	1.95	**1°**	3.5	2.63	8.86	20.27	20.97	21.72	-
HPI92830	R1.0	**2.0**	4	1.5	20	70	1.95	**1.5°**	3.5	2.70	6.18	11.36	20.37	21.10	-
HPI92831	R1.0	**2.0**	4	1.5	20	70	1.95	**2°**	3.5	2.77	5.29	7.43	13.86	20.48	-
HPI92832	R1.0	**2.0**	4	1.5	25	70	1.95	**0.5°**	3.5	2.11	25.18	26.02	26.93	27.90	-
HPI92833	R1.0	**2.0**	4	1.5	25	70	1.95	**1°**	3.5	2.17	8.86	25.27	26.15	27.09	-
HPI92834	R1.0	**2.0**	4	1.5	25	70	1.95	**1.5°**	3.5	2.23	6.18	11.36	25.37	26.29	-
HPI92835	R1.0	**2.0**	4	1.5	30	70	1.95	**0.5°**	3.5	1.79	30.18	31.20	32.29	-	-
HPI92836	R1.0	**2.0**	4	1.5	30	70	1.95	**1°**	3.5	1.84	8.86	30.27	31.33	-	-
HPI92837	R1.0	**2.0**	4	1.5	35	80	1.95	**0.5°**	3.5	1.56	35.18	36.37	37.65	-	-
HPI92838	R1.0	**2.0**	4	1.5	40	80	1.95	**0.5°**	3.5	1.38	40.18	41.55	-	-	-
HPI92839	R1.0	**2.0**	4	1.5	50	90	1.95	**0.5°**	3.5	1.12	50.18	51.89	-	-	-
HPI92840	R1.0	**2.0**	6	1.5	25	70	1.95	**2°**	3.5	3.98	5.29	7.43	13.86	25.48	27.47
HPI92841	R1.0	**2.0**	6	1.5	30	70	1.95	**1.5°**	3.5	3.37	6.18	11.36	30.37	31.48	33.95
HPI92842	R1.0	**2.0**	6	1.5	30	70	1.95	**2°**	3.5	3.46	5.29	7.43	13.86	30.48	32.87
HPI92843	R1.0	**2.0**	6	1.5	35	80	1.95	**1°**	3.5	2.90	8.86	35.27	36.51	37.84	-
HPI92844	R1.0	**2.0**	6	1.5	35	80	1.95	**1.5°**	3.5	2.98	6.18	11.36	35.37	36.66	-
HPI92845	R1.0	**2.0**	6	1.5	40	80	1.95	**1°**	3.5	2.59	8.86	40.27	41.69	43.22	-

NEXT PAGE ▶

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎


C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

SERIES PLAIN SHANK HPI92

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



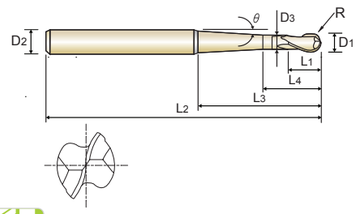



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | R +0.003 ~-0.007 | PLAIN | C COATING | P. 42-52

R0.05~R3 R3.5~R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Neck Taper Angle(°)	Under Neck Parallel Length	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3	θ°	L_4		0.5°	1°	1.5°	2°	3°
HPI92846	R1.0	**2.0**	6	1.5	40	80	1.95	**1.5°**	3.5	2.66	6.18	11.36	40.37	41.85	-
HPI92847	R1.0	**2.0**	6	1.5	40	80	1.95	**2°**	3.5	2.74	5.29	7.43	13.86	40.48	-
HPI92848	R1.0	**2.0**	6	1.5	50	90	1.95	**1°**	3.5	2.14	8.86	50.27	52.05	53.97	-
HPI92849	R1.0	**2.0**	6	1.5	50	90	1.95	**1.5°**	3.5	2.20	6.18	11.36	50.37	52.22	-
HPI92850	R1.0	**2.0**	6	1.5	50	90	1.95	**2°**	3.5	2.27	5.29	7.43	13.86	50.48	-
HPI92030	R1.5	**3.0**	6	2.5	15	70	2.85	**0.5°**	4.5	4.51	15.39	15.87	16.39	16.95	18.21
HPI92851	R1.5	**3.0**	6	2.5	15	70	2.85	**1°**	4.5	4.59	15.04	15.51	16.01	16.56	17.78
HPI92852	R1.5	**3.0**	6	2.5	15	70	2.85	**1.5°**	4.5	4.67	10.30	15.14	15.64	16.17	17.35
HPI92853	R1.5	**3.0**	6	2.5	15	70	2.85	**2°**	4.5	4.76	8.36	11.79	15.26	15.77	16.93
HPI92854	R1.5	**3.0**	6	2.5	20	70	2.85	**0.5°**	4.5	3.60	20.39	21.05	21.75	22.51	24.22
HPI92855	R1.5	**3.0**	6	2.5	20	70	2.85	**1°**	4.5	3.67	16.09	20.51	21.19	21.93	23.59
HPI92856	R1.5	**3.0**	6	2.5	20	70	2.85	**1.5°**	4.5	3.75	10.30	19.09	20.64	21.35	22.96
HPI92857	R1.5	**3.0**	6	2.5	20	70	2.85	**2°**	4.5	3.84	8.36	11.79	20.08	20.77	22.33
HPI92858	R1.5	**3.0**	6	2.5	25	70	2.85	**0.5°**	4.5	2.99	25.39	26.22	27.12	28.08	-
HPI92859	R1.5	**3.0**	6	2.5	25	70	2.85	**1°**	4.5	3.06	16.09	25.51	26.38	27.31	29.40
HPI92860	R1.5	**3.0**	6	2.5	25	70	2.85	**1.5°**	4.5	3.14	10.30	19.09	25.64	26.54	28.57
HPI92861	R1.5	**3.0**	6	2.5	30	70	2.85	**0.5°**	4.5	2.56	30.39	31.40	32.48	33.64	-
HPI92862	R1.5	**3.0**	6	2.5	30	70	2.85	**1°**	4.5	2.63	16.09	30.51	31.56	32.68	-
HPI92863	R1.5	**3.0**	6	2.5	30	70	2.85	**1.5°**	4.5	2.69	10.30	19.09	30.64	31.73	-
HPI92864	R1.5	**3.0**	6	2.5	30	70	2.85	**2°**	4.5	2.77	8.36	11.79	22.08	30.77	-
HPI92865	R1.5	**3.0**	6	2.5	40	80	2.85	**0.5°**	4.5	1.99	40.39	41.75	43.20	-	-
HPI92866	R1.5	**3.0**	6	2.5	40	80	2.85	**1°**	4.5	2.04	16.09	40.51	41.92	43.43	-
HPI92867	R1.5	**3.0**	6	2.5	40	80	2.85	**1.5°**	4.5	2.10	10.30	19.09	40.64	42.10	-
HPI92868	R1.5	**3.0**	6	2.5	50	90	2.85	**0.5°**	4.5	1.62	50.39	52.09	53.92	-	-
HPI92869	R1.5	**3.0**	6	2.5	50	90	2.85	**1°**	4.5	1.67	16.09	50.51	52.28	-	-
HPI92870	R1.5	**3.0**	6	2.5	50	90	2.85	**1.5°**	4.5	1.72	10.30	19.09	50.64	-	-

NEXT PAGE ▶

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎


C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

SERIES PLAIN SHANK **HPI92**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



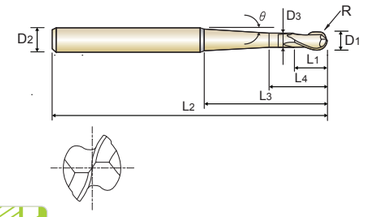



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | R +0.003 ~-0.007 | PLAIN | C COATING | P. 42-52

R0.05~R3 R3.5~R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Neck Taper Angle(°)	Under Neck Parallel Length	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3	θ°	L_4		0.5°	1°	1.5°	2°	3°
HPI92040	R2.0	**4.0**	6	3	20	80	3.85	**1°**	5	2.72	16.59	20.51	21.18	21.90	-
HPI92871	R2.0	**4.0**	6	3	30	80	3.85	**1°**	5	1.89	16.59	30.51	31.54	-	-
HPI92872	R2.0	**4.0**	6	3	40	80	3.85	**1°**	5	1.44	16.59	40.51	-	-	-
HPI92873	R2.0	**4.0**	6	3	50	90	3.85	**1°**	5	1.17	16.59	50.51	-	-	-
HPI92874	R2.0	**4.0**	6	3	61.1	110	3.85	**1°**	5	0.96	16.59	-	-	-	-
HPI92897	R2.5	**5.0**	8	10	30	80	4.85	**1°**	13	2.66	30.07	31.03	32.06	33.17	-
HPI92898	R2.5	**5.0**	8	10	40	90	4.85	**1°**	13	2.06	32.09	41.03	42.42	43.92	-
HPI92899	R2.5	**5.0**	8	10	60	110	4.85	**1°**	13	1.42	32.09	61.03	-	-	-
HPI92701	R2.5	**5.0**	8	10	90	140	4.85	**1°**	13	0.97	32.09	-	-	-	-
HPI92702	R2.5	**5.0**	8	10	74	150	4.75	**1.5°**	13	1.20	25.41	48.31	-	-	-
HPI92703	R2.5	**5.0**	8	10	100	150	4.85	**0.5°**	13	0.85	100.64	-	-	-	-
HPI92704	R3.0	**6.0**	8	12	30	80	5.85	**1°**	15	1.91	30.19	31.14	32.15	-	-
HPI92705	R3.0	**6.0**	8	12	40	90	5.85	**1°**	15	1.45	35.59	41.14	-	-	-
HPI92706	R3.0	**6.0**	8	12	45	95	5.85	**1°**	15	1.30	35.59	46.14	-	-	-
HPI92707	R3.0	**6.0**	8	12	50	100	5.85	**1°**	15	1.18	35.59	51.14	-	-	-
HPI92708	R3.0	**6.0**	8	12	120	200	5.85	**0.5°**	15	0.49	-	-	-	-	-
HPI92709	R3.0	**6.0**	10	12	30	80	5.85	**3°**	15	3.60	19.11	23.14	29.84	30.99	33.27
HPI92710	R3.0	**6.0**	10	12	50	100	5.85	**1.5°**	15	2.23	25.29	47.58	51.61	53.43	-
HPI92711	R3.0	**6.0**	10	12	60	110	5.85	**1°**	15	1.85	35.59	61.14	63.24	-	-
HPI92712	R3.0	**6.0**	10	12	70	120	5.85	**1°**	15	1.61	35.59	71.14	73.60	-	-
HPI92713	R3.0	**6.0**	10	12	80	130	5.85	**1°**	15	1.42	35.59	81.14	-	-	-
HPI92714	R3.0	**6.0**	10	12	96	200	5.75	**1.5°**	15	1.23	28.16	53.31	-	-	-
HPI92715	R3.0	**6.0**	10	12	120	200	5.85	**1°**	15	0.97	35.59	-	-	-	-
HPI92070	R3.5	**7.0**	10	14	40	90	6.7	**3°**	17	2.25	23.13	28.03	36.20	40.94	-
HPI92875	R3.5	**7.0**	10	14	45	95	6.7	**1°**	17	1.87	45.09	46.54	48.09	-	-
HPI92876	R3.5	**7.0**	10	14	60	110	6.7	**1.5°**	17	1.47	32.34	60.04	-	-	-

NEXT PAGE ▶

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎


C-COATED SOLID CARBIDE END MILLS


2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

SERIES PLAIN SHANK HPI92

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



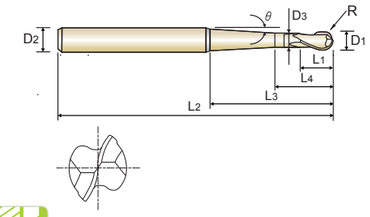



CARBIDE | 2 | 30° | R +0.001 ~-0.005 | R +0.003 ~-0.007 | PLAIN | C COATING | P. 42-52

R0.05~R3 R3.5~R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Neck Taper Angle(°)	Under Neck Parallel Length	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3	θ°	L_4		0.5°	1°	1.5°	2°	3°
HPI92080	R4.0	**8.0**	10	14	35	95	7.7	**3°**	17	1.80	23.03	27.78	35.08	-	-
HPI92877	R4.0	**8.0**	10	14	50	110	7.7	**1°**	17	1.19	47.18	51.50	-	-	-
HPI92878	R4.0	**8.0**	10	14	50	110	7.7	**1.5°**	17	1.22	32.09	50.35	-	-	-
HPI92879	R4.0	**8.0**	10	14	55	115	7.7	**1°**	17	1.08	47.18	56.50	-	-	-
HPI92880	R4.0	**8.0**	10	14	60	120	7.7	**1°**	17	1.00	47.18	-	-	-	-
HPI92881	R4.0	**8.0**	10	14	70	130	7.7	**1°**	17	0.86	47.18	-	-	-	-
HPI92882	R4.0	**8.0**	10	14	120	200	7.7	**0.5°**	17	0.49	-	-	-	-	-
HPI92883	R4.0	**8.0**	12	14	80	140	7.7	**1°**	17	1.43	47.18	81.50	-	-	-
HPI92884	R4.0	**8.0**	12	14	98	200	7.7	**1.5°**	17	1.22	32.09	60.17	-	-	-
HPI92885	R4.0	**8.0**	12	14	120	200	7.7	**1°**	17	0.98	47.18	-	-	-	-
HPI92100	R5.0	**10.0**	12	18	35	105	9.7	**3°**	21	1.82	27.63	33.28	35.83	-	-
HPI92886	R5.0	**10.0**	12	18	55	125	9.7	**1.5°**	21	1.12	37.59	55.53	-	-	-
HPI92887	R5.0	**10.0**	12	18	60	130	9.7	**1°**	21	1.01	54.18	61.71	-	-	-
HPI92888	R5.0	**10.0**	12	18	65	135	9.7	**1°**	21	0.93	54.18	-	-	-	-
HPI92889	R5.0	**10.0**	12	18	75	140	9.7	**1°**	21	0.81	54.18	-	-	-	-
HPI92890	R5.0	**10.0**	12	18	86	200	9.7	**1°**	21	0.71	54.18	-	-	-	-
HPI92891	R5.0	**10.0**	12	18	120	200	9.7	**0.5°**	21	0.49	-	-	-	-	-
HPI92892	R5.0	**10.0**	16	18	120	200	9.7	**1.5°**	21	1.47	37.59	70.17	-	-	-
HPI92120	R6.0	**12.0**	16	22	60	140	11.7	**3°**	25	2.08	32.23	38.78	49.69	60.86	-
HPI92893	R6.0	**12.0**	16	22	80	160	11.7	**1.5°**	25	1.49	43.09	80.01	-	-	-
HPI92894	R6.0	**12.0**	16	22	106	200	11.7	**1.5°**	25	1.14	43.09	80.17	-	-	-
HPI92895	R6.0	**12.0**	16	22	120	200	11.7	**1°**	25	0.99	61.18	-	-	-	-

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE CORNER RADIUS for RIB PROCESSING


SERIES

PLAIN SHANK **HPI89**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



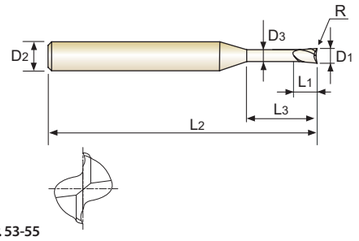



CARBIDE | 2 | 35° | R ±0.005 | PLAIN | C COATING | P. 53-55

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI89002	R0.02	**0.2**	4	0.15	0.5	45	0.17	13.99	0.61	0.65	0.68	0.72	0.82
HPI89901	R0.05	**0.2**	4	0.15	0.5	45	0.17	14.04	0.61	0.64	0.68	0.72	0.81
HPI89902	R0.02	**0.2**	4	0.15	1	45	0.17	13.16	1.14	1.20	1.27	1.35	1.54
HPI89903	R0.05	**0.2**	4	0.15	1	45	0.17	13.21	1.14	1.20	1.27	1.34	1.52
HPI89904	R0.02	**0.2**	4	0.15	1.5	45	0.17	12.42	1.67	1.76	1.86	1.97	2.25
HPI89905	R0.05	**0.2**	4	0.15	1.5	45	0.17	12.46	1.66	1.75	1.85	1.96	2.23
HPI89906	R0.02	**0.2**	4	0.15	2	45	0.17	11.76	2.19	2.31	2.45	2.60	2.96
HPI89907	R0.05	**0.2**	4	0.15	2	45	0.17	11.80	2.19	2.31	2.44	2.59	2.95
HPI89003	R0.02	**0.3**	4	0.25	1	45	0.27	13.12	1.14	1.20	1.27	1.35	1.54
HPI89908	R0.05	**0.3**	4	0.25	1	45	0.27	13.16	1.14	1.20	1.27	1.34	1.52
HPI89909	R0.02	**0.3**	4	0.25	1.5	45	0.27	12.36	1.67	1.76	1.86	1.97	2.25
HPI89910	R0.05	**0.3**	4	0.25	1.5	45	0.27	12.41	1.66	1.75	1.85	1.96	2.23
HPI89911	R0.02	**0.3**	4	0.25	2	45	0.27	11.69	2.19	2.31	2.45	2.60	2.96
HPI89912	R0.05	**0.3**	4	0.25	2	45	0.27	11.73	2.19	2.31	2.44	2.59	2.95
HPI89913	R0.02	**0.3**	4	0.25	2.5	45	0.27	11.09	2.72	2.87	3.03	3.22	3.67
HPI89914	R0.05	**0.3**	4	0.25	2.5	45	0.27	11.12	2.72	2.86	3.03	3.21	3.66
HPI89915	R0.02	**0.3**	4	0.25	3	45	0.27	10.54	3.24	3.42	3.62	3.84	4.38
HPI89916	R0.05	**0.3**	4	0.25	3	45	0.27	10.57	3.24	3.42	3.61	3.83	4.37
HPI89004	R0.02	**0.4**	4	0.3	1	45	0.37	13.07	1.14	1.20	1.27	1.35	1.54
HPI89917	R0.05	**0.4**	4	0.3	1	45	0.37	13.12	1.14	1.20	1.27	1.34	1.52
HPI89918	R0.1	**0.4**	4	0.3	1	45	0.37	13.20	1.14	1.19	1.26	1.33	1.50
HPI89919	R0.02	**0.4**	4	0.3	1.5	45	0.37	12.30	1.67	1.76	1.86	1.97	2.25
HPI89920	R0.05	**0.4**	4	0.3	1.5	45	0.37	12.35	1.66	1.75	1.85	1.96	2.23
HPI89921	R0.02	**0.4**	4	0.3	2	45	0.37	11.62	2.19	2.31	2.45	2.60	2.96
HPI89922	R0.05	**0.4**	4	0.3	2	45	0.37	11.66	2.19	2.31	2.44	2.59	2.95
HPI89923	R0.1	**0.4**	4	0.3	2	45	0.37	11.72	2.19	2.30	2.43	2.58	2.92

NEXT PAGE ▶

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
±0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P													M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2		12	13	14.1	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	44		15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	409		200	240	180	180	260	160	250	130	230	
Recommend					○			○	○		○	○											

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE CORNER RADIUS for RIB PROCESSING


SERIES

PLAIN SHANK HPI89

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



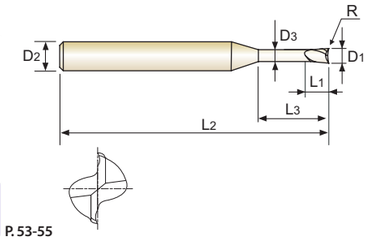



CARBIDE | 2 | 35° | R ±0.005 | PLAIN | C COATING | P. 53-55

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI89924	R0.02	**0.4**	4	0.3	2.5	45	0.37	11.01	2.72	2.87	3.03	3.22	3.67
HPI89925	R0.05	**0.4**	4	0.3	2.5	45	0.37	11.04	2.72	2.86	3.03	3.21	3.66
HPI89926	R0.02	**0.4**	4	0.3	3	45	0.37	10.46	3.24	3.42	3.62	3.84	4.38
HPI89927	R0.05	**0.4**	4	0.3	3	45	0.37	10.49	3.24	3.42	3.61	3.83	4.37
HPI89928	R0.1	**0.4**	4	0.3	3	45	0.37	10.54	3.24	3.41	3.61	3.82	4.35
HPI89929	R0.02	**0.4**	4	0.3	4	45	0.37	9.50	4.30	4.53	4.79	5.09	5.80
HPI89930	R0.05	**0.4**	4	0.3	4	45	0.37	9.53	4.30	4.53	4.79	5.08	5.79
HPI89931	R0.1	**0.4**	4	0.3	4	45	0.37	9.57	4.29	4.52	4.78	5.07	5.77
HPI89005	R0.02	**0.5**	4	0.4	1	45	0.45	12.96	1.20	1.27	1.34	1.42	1.62
HPI89932	R0.05	**0.5**	4	0.4	1	45	0.45	13.01	1.20	1.26	1.33	1.41	1.60
HPI89933	R0.1	**0.5**	4	0.4	1	45	0.45	13.09	1.20	1.26	1.32	1.40	1.58
HPI89934	R0.02	**0.5**	4	0.4	2	45	0.45	11.50	2.25	2.37	2.51	2.67	3.04
HPI89935	R0.05	**0.5**	4	0.4	2	45	0.45	11.54	2.25	2.37	2.51	2.66	3.03
HPI89936	R0.1	**0.5**	4	0.4	2	45	0.45	11.60	2.25	2.37	2.50	2.65	3.01
HPI89937	R0.02	**0.5**	4	0.4	3	45	0.45	10.33	3.30	3.48	3.69	3.91	4.46
HPI89938	R0.05	**0.5**	4	0.4	3	45	0.45	10.36	3.30	3.48	3.68	3.91	4.45
HPI89939	R0.1	**0.5**	4	0.4	3	45	0.45	10.41	3.30	3.48	3.67	3.89	4.43
HPI89940	R0.02	**0.5**	4	0.4	4	45	0.45	9.37	4.36	4.59	4.86	5.16	5.88
HPI89941	R0.05	**0.5**	4	0.4	4	45	0.45	9.40	4.35	4.59	4.86	5.15	5.87
HPI89942	R0.1	**0.5**	4	0.4	4	45	0.45	9.44	4.35	4.59	4.85	5.14	5.85
HPI89943	R0.02	**0.5**	4	0.4	5	45	0.45	8.58	5.41	5.70	6.04	6.41	7.31
HPI89944	R0.05	**0.5**	4	0.4	5	45	0.45	8.60	5.41	5.70	6.03	6.40	7.30
HPI89945	R0.1	**0.5**	4	0.4	5	45	0.45	8.63	5.40	5.70	6.02	6.39	7.27
HPI89946	R0.02	**0.5**	4	0.4	6	45	0.45	7.90	6.46	6.81	7.21	7.65	8.73
HPI89947	R0.05	**0.5**	4	0.4	6	45	0.45	7.92	6.46	6.81	7.20	7.65	8.72
HPI89948	R0.1	**0.5**	4	0.4	6	45	0.45	7.95	6.46	6.81	7.20	7.63	8.70

NEXT PAGE ▶

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
±0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P													M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2		12	13	14.1	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	44		15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	409		200	240	180	180	260	160	250	130	230	
Recommend					○			○	○		○	○											

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE CORNER RADIUS for RIB PROCESSING


SERIES

PLAIN SHANK **HPI89**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



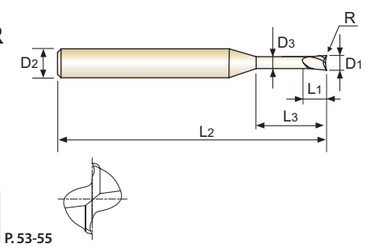



CARBIDE | 2 | 35° | R ±0.005 | PLAIN | C COATING | P. 53-55

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI89006	R0.02	**0.6**	4	0.5	2	45	0.55	11.42	2.25	2.37	2.51	2.67	3.04
HPI89949	R0.05	**0.6**	4	0.5	2	45	0.55	11.46	2.25	2.37	2.51	2.66	3.03
HPI89950	R0.1	**0.6**	4	0.5	2	45	0.55	11.52	2.25	2.37	2.50	2.65	3.01
HPI89951	R0.02	**0.6**	4	0.5	4	45	0.55	9.27	4.36	4.59	4.86	5.16	5.88
HPI89952	R0.05	**0.6**	4	0.5	4	45	0.55	9.29	4.35	4.59	4.86	5.15	5.87
HPI89953	R0.1	**0.6**	4	0.5	4	45	0.55	9.34	4.35	4.59	4.85	5.14	5.85
HPI89954	R0.02	**0.6**	4	0.5	6	45	0.55	7.80	6.46	6.81	7.21	7.65	8.73
HPI89955	R0.05	**0.6**	4	0.5	6	45	0.55	7.81	6.46	6.81	7.20	7.65	8.72
HPI89956	R0.1	**0.6**	4	0.5	6	45	0.55	7.85	6.46	6.81	7.20	7.63	8.70
HPI89957	R0.02	**0.6**	4	0.5	8	50	0.55	6.72	8.56	9.03	9.56	10.15	11.41
HPI89958	R0.05	**0.6**	4	0.5	8	50	0.55	6.74	8.56	9.03	9.55	10.14	11.40
HPI89959	R0.1	**0.6**	4	0.5	8	50	0.55	6.76	8.56	9.03	9.54	10.13	11.39
HPI89960	R0.02	**0.6**	4	0.5	10	50	0.55	5.91	10.67	11.25	11.91	12.64	13.74
HPI89961	R0.05	**0.6**	4	0.5	10	50	0.55	5.92	10.67	11.25	11.90	12.63	13.74
HPI89962	R0.1	**0.6**	4	0.5	10	50	0.55	5.94	10.66	11.25	11.89	12.62	13.73
HPI89007	R0.02	**0.7**	4	0.55	2	45	0.65	11.34	2.25	2.37	2.51	2.67	3.04
HPI89963	R0.05	**0.7**	4	0.55	2	45	0.65	11.38	2.25	2.37	2.51	2.66	3.03
HPI89964	R0.1	**0.7**	4	0.55	2	45	0.65	11.44	2.25	2.37	2.50	2.65	3.01
HPI89965	R0.02	**0.7**	4	0.55	4	45	0.65	9.16	4.36	4.59	4.86	5.16	5.88
HPI89966	R0.05	**0.7**	4	0.55	4	45	0.65	9.19	4.35	4.59	4.86	5.15	5.87
HPI89967	R0.1	**0.7**	4	0.55	4	45	0.65	9.23	4.35	4.59	4.85	5.14	5.85
HPI89968	R0.02	**0.7**	4	0.55	6	45	0.65	7.68	6.46	6.81	7.21	7.65	8.73
HPI89969	R0.05	**0.7**	4	0.55	6	45	0.65	7.70	6.46	6.81	7.20	7.65	8.72
HPI89970	R0.1	**0.7**	4	0.55	6	45	0.65	7.73	6.46	6.81	7.20	7.63	8.70
HPI89008	R0.02	**0.8**	4	0.65	2	45	0.75	11.25	2.25	2.37	2.51	2.67	3.04
HPI89971	R0.05	**0.8**	4	0.65	2	45	0.75	11.29	2.25	2.37	2.51	2.66	3.03

NEXT PAGE ▶

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
±0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P													M		K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE CORNER RADIUS for RIB PROCESSING


SERIES

PLAIN SHANK HPI89

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



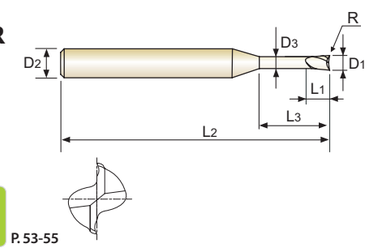



CARBIDE | 2 | 35° | R ±0.005 | PLAIN | C COATING | P. 53-55

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI89972	R0.1	**0.8**	4	0.65	2	45	0.75	11.36	2.25	2.37	2.50	2.65	3.01
HPI89973	R0.2	**0.8**	4	0.65	2	45	0.75	11.50	2.24	2.36	2.48	2.62	2.96
HPI89974	R0.02	**0.8**	4	0.65	4	45	0.75	9.05	4.36	4.59	4.86	5.16	5.88
HPI89975	R0.05	**0.8**	4	0.65	4	45	0.75	9.08	4.35	4.59	4.86	5.15	5.87
HPI89976	R0.1	**0.8**	4	0.65	4	45	0.75	9.12	4.35	4.59	4.85	5.14	5.85
HPI89977	R0.2	**0.8**	4	0.65	4	45	0.75	9.21	4.35	4.57	4.83	5.12	5.81
HPI89978	R0.02	**0.8**	4	0.65	6	45	0.75	7.57	6.46	6.81	7.21	7.65	8.73
HPI89979	R0.05	**0.8**	4	0.65	6	45	0.75	7.59	6.46	6.81	7.20	7.65	8.72
HPI89980	R0.1	**0.8**	4	0.65	6	45	0.75	7.62	6.46	6.81	7.20	7.63	8.70
HPI89981	R0.2	**0.8**	4	0.65	6	45	0.75	7.68	6.45	6.79	7.18	7.61	8.65
HPI89982	R0.02	**0.8**	4	0.65	8	50	0.75	6.50	8.56	9.03	9.56	10.15	11.29
HPI89983	R0.05	**0.8**	4	0.65	8	50	0.75	6.51	8.56	9.03	9.55	10.14	11.29
HPI89984	R0.1	**0.8**	4	0.65	8	50	0.75	6.54	8.56	9.03	9.54	10.13	11.28
HPI89985	R0.2	**0.8**	4	0.65	8	50	0.75	6.58	8.56	9.01	9.53	10.10	11.26
HPI89986	R0.05	**0.8**	4	0.65	12	50	0.75	5.08	12.77	13.47	14.25	15.11	15.96
HPI89987	R0.1	**0.8**	4	0.65	12	50	0.75	5.09	12.77	13.46	14.24	15.11	15.95
HPI89988	R0.2	**0.8**	4	0.65	12	50	0.75	5.12	12.76	13.45	14.22	15.09	15.93
HPI89009	R0.1	**0.9**	4	0.7	4	45	0.85	9.01	4.35	4.59	4.85	5.14	5.85
HPI89989	R0.1	**0.9**	4	0.7	8	50	0.85	6.42	8.56	9.03	9.54	10.13	11.22
HPI89010	R0.1	**1.0**	4	0.8	4	50	0.95	8.89	4.35	4.59	4.85	5.14	5.85
HPI89990	R0.2	**1.0**	4	0.8	4	50	0.95	8.98	4.35	4.57	4.83	5.12	5.81
HPI89991	R0.1	**1.0**	4	0.8	6	50	0.95	7.37	6.46	6.81	7.20	7.63	8.70
HPI89992	R0.2	**1.0**	4	0.8	6	50	0.95	7.44	6.45	6.79	7.18	7.61	8.65
HPI89993	R0.3	**1.0**	4	0.8	6	50	0.95	7.50	6.45	6.78	7.16	7.58	8.61
HPI89994	R0.1	**1.0**	4	0.8	8	50	0.95	6.30	8.56	9.03	9.54	10.13	11.16
HPI89995	R0.2	**1.0**	4	0.8	8	50	0.95	6.34	8.56	9.01	9.53	10.10	11.15

NEXT PAGE ▶

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
±0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P													M		K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE CORNER RADIUS for RIB PROCESSING


SERIES

PLAIN SHANK **HPI89**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



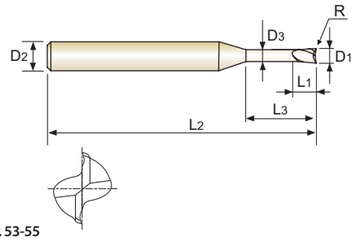



P. 53-55

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI89996	R0.1	**1.0**	4	0.8	10	50	0.95	5.50	10.66	11.25	11.89	12.62	13.50
HPI89997	R0.2	**1.0**	4	0.8	10	50	0.95	5.53	10.66	11.23	11.88	12.60	13.48
HPI89998	R0.3	**1.0**	4	0.8	10	50	0.95	5.57	10.65	11.22	11.86	12.57	13.47
HPI89999	R0.1	**1.0**	4	0.8	12	55	0.95	4.87	12.77	13.46	14.24	15.00	15.84
HPI89801	R0.2	**1.0**	4	0.8	12	55	0.95	4.90	12.76	13.45	14.22	14.99	15.82
HPI89802	R0.1	**1.0**	4	0.8	16	60	0.95	3.97	16.98	17.90	18.92	19.42	20.51
HPI89803	R0.2	**1.0**	4	0.8	16	60	0.95	3.99	16.97	17.89	18.92	19.41	20.49
HPI89804	R0.3	**1.0**	4	0.8	16	60	0.95	4.01	16.97	17.88	18.90	19.40	20.47
HPI89805	R0.1	**1.0**	4	0.8	20	60	0.95	3.35	21.19	22.34	23.23	23.85	25.18
HPI89806	R0.2	**1.0**	4	0.8	20	60	0.95	3.37	21.18	22.33	23.23	23.84	25.16
HPI89807	R0.3	**1.0**	4	0.8	20	60	0.95	3.38	21.17	22.32	23.22	23.83	25.15
HPI89015	R0.1	**1.5**	4	1.35	4	50	1.45	8.21	4.23	4.37	4.53	4.69	5.06
HPI89808	R0.2	**1.5**	4	1.35	4	50	1.45	8.31	4.22	4.36	4.51	4.68	5.04
HPI89809	R0.1	**1.5**	4	1.35	8	50	1.45	5.64	8.36	8.65	8.96	9.29	10.04
HPI89810	R0.2	**1.5**	4	1.35	8	50	1.45	5.68	8.36	8.64	8.95	9.28	10.01
HPI89811	R0.3	**1.5**	4	1.35	8	50	1.45	5.73	8.36	8.64	8.94	9.26	9.99
HPI89812	R0.2	**1.5**	4	1.35	12	55	1.45	4.32	12.49	12.92	13.38	13.88	14.99
HPI89813	R0.1	**1.5**	4	1.35	15	55	1.45	3.64	15.60	16.14	16.72	17.34	18.74
HPI89814	R0.2	**1.5**	4	1.35	15	55	1.45	3.66	15.59	16.13	16.71	17.33	18.71
HPI89815	R0.3	**1.5**	4	1.35	15	55	1.45	3.68	15.59	16.12	16.70	17.31	18.69
HPI89816	R0.1	**1.5**	4	1.35	20	60	1.45	2.90	20.77	21.49	22.26	23.09	-
HPI89817	R0.2	**1.5**	4	1.35	20	60	1.45	2.91	20.76	21.48	22.25	23.07	-
HPI89818	R0.3	**1.5**	4	1.35	20	60	1.45	2.93	20.76	21.47	22.24	23.06	-
HPI89020	R0.2	**2.0**	4	1.7	6	50	1.95	5.93	6.29	6.50	6.73	6.98	7.53
HPI89819	R0.5	**2.0**	4	1.7	6	50	1.95	6.12	6.28	6.48	6.70	6.93	7.45
HPI89820	R0.2	**2.0**	4	1.7	8	50	1.95	4.92	8.36	8.64	8.95	9.28	10.01

NEXT PAGE ▶

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
±0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P															M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel						Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE CORNER RADIUS for RIB PROCESSING


SERIES

PLAIN SHANK HPI89

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



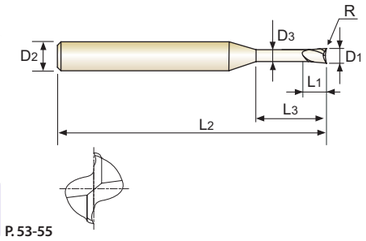



P. 53-55

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI89821	R0.3	**2.0**	4	1.7	8	50	1.95	4.96	8.36	8.64	8.94	9.26	9.99
HPI89822	R0.5	**2.0**	4	1.7	8	50	1.95	5.05	8.35	8.62	8.92	9.23	9.94
HPI89823	R0.8	**2.0**	4	1.7	8	50	1.95	5.18	8.34	8.60	8.88	9.19	9.87
HPI89824	R0.2	**2.0**	4	1.7	12	55	1.95	3.66	12.49	12.92	13.38	13.88	14.99
HPI89825	R0.5	**2.0**	4	1.7	12	55	1.95	3.73	12.48	12.90	13.35	13.83	14.91
HPI89826	R0.2	**2.0**	4	1.7	16	55	1.95	2.92	16.63	17.20	17.81	18.48	-
HPI89827	R0.3	**2.0**	4	1.7	16	55	1.95	2.93	16.62	17.19	17.80	18.46	-
HPI89828	R0.5	**2.0**	4	1.7	16	55	1.95	2.96	16.62	17.18	17.78	18.43	-
HPI89829	R0.8	**2.0**	4	1.7	16	55	1.95	3.01	16.61	17.16	17.75	18.39	19.81
HPI89830	R0.2	**2.0**	4	1.7	20	60	1.95	2.42	20.76	21.48	22.25	23.07	-
HPI89831	R0.3	**2.0**	4	1.7	20	60	1.95	2.43	20.76	21.47	22.24	23.06	-
HPI89832	R0.5	**2.0**	4	1.7	20	60	1.95	2.45	20.75	21.46	22.22	23.03	-
HPI89833	R0.8	**2.0**	4	1.7	20	60	1.95	2.49	20.74	21.44	22.18	22.98	-
HPI89834	R0.2	**2.0**	4	1.7	25	65	1.95	2.00	25.93	26.83	27.79	28.82	-
HPI89835	R0.5	**2.0**	4	1.7	25	65	1.95	2.02	25.92	26.81	27.76	28.78	-
HPI89836	R0.2	**2.0**	4	1.7	30	70	1.95	1.70	31.10	32.18	33.33	-	-
HPI89837	R0.5	**2.0**	4	1.7	30	70	1.95	1.72	31.09	32.16	33.30	-	-
HPI89030	R0.2	**3.0**	6	2.5	8	55	2.85	6.26	8.55	8.84	9.16	9.49	10.24
HPI89838	R0.3	**3.0**	6	2.5	8	55	2.85	6.30	8.55	8.84	9.14	9.48	10.22
HPI89839	R0.5	**3.0**	6	2.5	8	55	2.85	6.40	8.54	8.82	9.12	9.45	10.17
HPI89840	R0.2	**3.0**	6	2.5	12	60	2.85	4.85	12.69	13.12	13.59	14.09	15.22
HPI89841	R0.5	**3.0**	6	2.5	12	60	2.85	4.93	12.68	13.10	13.56	14.05	15.14
HPI89842	R0.2	**3.0**	6	2.5	16	60	2.85	3.96	16.82	17.40	18.02	18.69	20.19
HPI89843	R0.3	**3.0**	6	2.5	16	60	2.85	3.98	16.82	17.39	18.01	18.67	20.17
HPI89844	R0.5	**3.0**	6	2.5	16	60	2.85	4.01	16.81	17.38	17.99	18.64	20.12
HPI89845	R0.2	**3.0**	6	2.5	20	65	2.85	3.34	20.96	21.68	22.45	23.29	25.16

NEXT PAGE ▶

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
±0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P															M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel						Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎


C-COATED SOLID CARBIDE END MILLS

2 FLUTE CORNER RADIUS for RIB PROCESSING

SERIES

PLAIN SHANK **HPI89**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining

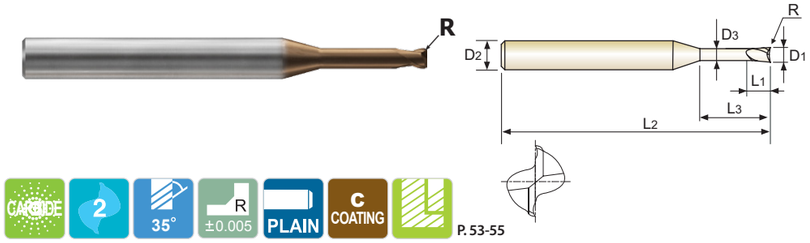

CARBIDE | 2 | 35° | R ±0.005 | PLAIN | C COATING | P. 53-55

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D1	D2	L1	L3	L2	D3		0.5°	1°	1.5°	2°	3°
HPI89846	R0.3	**3.0**	6	2.5	20	65	2.85	3.36	20.95	21.67	22.44	23.27	25.14
HPI89847	R0.5	**3.0**	6	2.5	20	65	2.85	3.38	20.95	21.66	22.42	23.24	25.09
HPI89848	R0.2	**3.0**	6	2.5	30	75	2.85	2.41	31.29	32.38	33.54	34.79	-
HPI89849	R0.3	**3.0**	6	2.5	30	75	2.85	2.41	31.29	32.37	33.53	34.77	-
HPI89850	R0.5	**3.0**	6	2.5	30	75	2.85	2.43	31.28	32.36	33.51	34.74	-
HPI89851	R0.2	**3.0**	6	2.5	35	80	2.85	2.11	36.46	37.72	39.08	40.54	-
HPI89852	R0.5	**3.0**	6	2.5	35	80	2.85	2.13	36.45	37.70	39.05	40.49	-

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
±0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P													M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎


C-COATED SOLID CARBIDE END MILLS

2 FLUTE SQUARE for RIB PROCESSING

SERIES

PLAIN SHANK **HPI88**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining

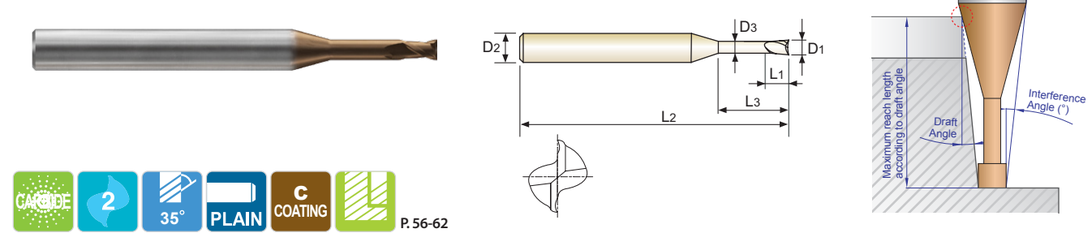


CARBIDE | 2 | 35° | PLAIN | C COATING | P. 56-62

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	D1	D2	L1	L3	L2	D3		0.5°	1°	1.5°	2°	3°
HPI88001	**0.1**	4	0.08	0.3	45	0.085	14.38	0.36	0.38	0.40	0.43	0.49
HPI88901	**0.1**	4	0.08	0.5	45	0.085	14.03	0.57	0.60	0.64	0.68	0.77
HPI88902	**0.1**	4	0.08	0.75	45	0.085	13.61	0.83	0.88	0.93	0.99	1.13
HPI88903	**0.1**	4	0.08	1	45	0.085	13.21	1.10	1.16	1.22	1.30	1.48
HPI880015	**0.15**	4	0.12	0.3	45	0.135	14.37	0.36	0.38	0.40	0.43	0.49
HPI88904	**0.15**	4	0.12	0.5	45	0.135	14.01	0.57	0.60	0.64	0.68	0.77
HPI88905	**0.15**	4	0.12	0.75	45	0.135	13.59	0.83	0.88	0.93	0.99	1.13
HPI88906	**0.15**	4	0.12	1	45	0.135	13.19	1.10	1.16	1.22	1.30	1.48
HPI88907	**0.15**	4	0.12	1.5	45	0.135	12.46	1.62	1.71	1.81	1.92	2.19
HPI88002	**0.2**	4	0.15	0.5	45	0.17	13.95	0.62	0.65	0.69	0.73	0.83
HPI88908	**0.2**	4	0.15	0.75	45	0.17	13.53	0.88	0.93	0.98	1.04	1.19
HPI88909	**0.2**	4	0.15	1	45	0.17	13.13	1.14	1.20	1.27	1.35	1.54
HPI88910	**0.2**	4	0.15	1.5	45	0.17	12.39	1.67	1.76	1.86	1.98	2.26
HPI88911	**0.2**	4	0.15	2	45	0.17	11.73	2.19	2.31	2.45	2.60	2.97
HPI88912	**0.2**	4	0.15	2.5	45	0.17	11.14	2.72	2.87	3.04	3.22	3.68
HPI88913	**0.2**	4	0.15	3	45	0.17	10.61	3.25	3.42	3.62	3.85	4.39
HPI88003	**0.3**	4	0.25	1	45	0.27	13.08	1.14	1.20	1.27	1.35	1.54
HPI88914	**0.3**	4	0.25	1.5	45	0.27	12.33	1.67	1.76	1.86	1.98	2.26
HPI88915	**0.3**	4	0.25	2	45	0.27	11.67	2.19	2.31	2.45	2.60	2.97
HPI88916	**0.3**	4	0.25	2.5	45	0.27	11.06	2.72	2.87	3.04	3.22	3.68
HPI88917	**0.3**	4	0.25	3	45	0.27	10.52	3.25	3.42	3.62	3.85	4.39
HPI88004	**0.4**	4	0.3	1	45	0.37	13.04	1.14	1.20	1.27	1.35	1.54
HPI88918	**0.4**	4	0.3	1.5	45	0.37	12.27	1.67	1.76	1.86	1.98	2.26
HPI88919	**0.4**	4	0.3	2	45	0.37	11.59	2.19	2.31	2.45	2.60	2.97
HPI88920	**0.4**	4	0.3	2.5	45	0.37	10.98	2.72	2.87	3.04	3.22	3.68
HPI88921	**0.4**	4	0.3	3	45	0.37	10.44	3.25	3.42	3.62	3.85	4.39

NEXT PAGE ▶

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P													M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE SQUARE for RIB PROCESSING


SERIES

PLAIN SHANK **HPI88**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



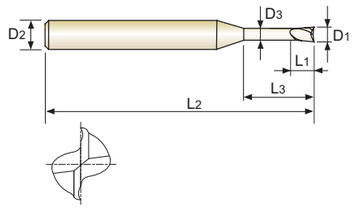




P. 56-62

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI88922	**0.4**	4	0.3	3.5	45	0.37	9.94	3.77	3.98	4.21	4.47	5.10
HPI88923	**0.4**	4	0.3	4	45	0.37	9.49	4.30	4.53	4.80	5.09	5.81
HPI88924	**0.4**	4	0.3	5	45	0.37	8.69	5.35	5.64	5.97	6.34	7.24
HPI88925	**0.4**	4	0.3	6	45	0.37	8.02	6.40	6.75	7.15	7.59	8.66
HPI88926	**0.4**	4	0.3	8	45	0.37	6.95	8.51	8.97	9.50	10.08	11.48
HPI88927	**0.4**	4	0.3	10	45	0.37	6.13	10.61	11.19	11.84	12.58	13.82
HPI88005	**0.5**	4	0.4	1	45	0.45	12.93	1.20	1.27	1.34	1.42	1.62
HPI88928	**0.5**	4	0.4	1.5	45	0.45	12.16	1.73	1.82	1.93	2.05	2.34
HPI88929	**0.5**	4	0.4	2	45	0.45	11.47	2.25	2.38	2.52	2.67	3.05
HPI88930	**0.5**	4	0.4	2.5	45	0.45	10.86	2.78	2.93	3.10	3.29	3.76
HPI88931	**0.5**	4	0.4	3	45	0.45	10.31	3.31	3.49	3.69	3.92	4.47
HPI88932	**0.5**	4	0.4	3.5	45	0.45	9.81	3.83	4.04	4.28	4.54	5.18
HPI88933	**0.5**	4	0.4	4	45	0.45	9.35	4.36	4.60	4.86	5.16	5.89
HPI88934	**0.5**	4	0.4	4.5	45	0.45	8.94	4.88	5.15	5.45	5.79	6.60
HPI88935	**0.5**	4	0.4	5	45	0.45	8.56	5.41	5.71	6.04	6.41	7.32
HPI88936	**0.5**	4	0.4	6	45	0.45	7.89	6.46	6.82	7.21	7.66	8.74
HPI88937	**0.5**	4	0.4	7	45	0.45	7.32	7.51	7.93	8.39	8.91	10.16
HPI88938	**0.5**	4	0.4	8	50	0.45	6.82	8.57	9.04	9.56	10.15	11.47
HPI88939	**0.5**	4	0.4	9	50	0.45	6.39	9.62	10.15	10.74	11.40	12.64
HPI88940	**0.5**	4	0.4	10	50	0.45	6.01	10.67	11.26	11.91	12.65	13.80
HPI88006	**0.6**	4	0.5	1.5	45	0.55	12.09	1.73	1.82	1.93	2.05	2.34
HPI88941	**0.6**	4	0.5	2	45	0.55	11.39	2.25	2.38	2.52	2.67	3.05
HPI88942	**0.6**	4	0.5	3	45	0.55	10.21	3.31	3.49	3.69	3.92	4.47
HPI88943	**0.6**	4	0.5	4	45	0.55	9.25	4.36	4.60	4.86	5.16	5.89
HPI88944	**0.6**	4	0.5	5	45	0.55	8.45	5.41	5.71	6.04	6.41	7.32
HPI88945	**0.6**	4	0.5	6	45	0.55	7.78	6.46	6.82	7.21	7.66	8.74

NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE SQUARE for RIB PROCESSING


SERIES

PLAIN SHANK HPI88

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



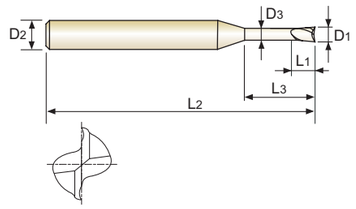




P. 56-62

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI88007	**0.7**	4	0.55	2	45	0.65	11.31	2.25	2.38	2.52	2.67	3.05
HPI88946	**0.7**	4	0.55	4	45	0.65	9.14	4.36	4.60	4.86	5.16	5.89
HPI88947	**0.7**	4	0.55	6	45	0.65	7.67	6.46	6.82	7.21	7.66	8.74
HPI88948	**0.7**	4	0.55	8	50	0.65	6.60	8.57	9.04	9.56	10.15	11.35
HPI88949	**0.7**	4	0.55	10	50	0.65	5.80	10.67	11.26	11.91	12.65	13.69
HPI88008	**0.8**	4	0.65	3	45	0.75	10.01	3.31	3.49	3.69	3.92	4.47
HPI88950	**0.8**	4	0.65	4	45	0.75	9.03	4.36	4.60	4.86	5.16	5.89
HPI88951	**0.8**	4	0.65	5	45	0.75	8.23	5.41	5.71	6.04	6.41	7.32
HPI88952	**0.8**	4	0.65	6	45	0.75	7.55	6.46	6.82	7.21	7.66	8.74
HPI88953	**0.8**	4	0.65	8	50	0.75	6.49	8.57	9.04	9.56	10.15	11.29
HPI88954	**0.8**	4	0.65	10	50	0.75	5.69	10.67	11.26	11.91	12.65	13.63
HPI88955	**0.8**	4	0.65	12	50	0.75	5.06	12.77	13.48	14.26	15.12	15.97
HPI88010	**1.0**	4	0.8	2	50	0.95	11.04	2.25	2.38	2.52	2.67	3.05
HPI88956	**1.0**	4	0.8	3	50	0.95	9.79	3.31	3.49	3.69	3.92	4.47
HPI88957	**1.0**	4	0.8	4	50	0.95	8.80	4.36	4.60	4.86	5.16	5.89
HPI88958	**1.0**	4	0.8	5	50	0.95	7.99	5.41	5.71	6.04	6.41	7.32
HPI88959	**1.0**	4	0.8	6	50	0.95	7.31	6.46	6.82	7.21	7.66	8.74
HPI88960	**1.0**	4	0.8	7	50	0.95	6.74	7.51	7.93	8.39	8.91	10.01
HPI88961	**1.0**	4	0.8	8	50	0.95	6.25	8.57	9.04	9.56	10.15	11.18
HPI88962	**1.0**	4	0.8	9	50	0.95	5.83	9.62	10.15	10.74	11.40	12.35
HPI88963	**1.0**	4	0.8	10	50	0.95	5.46	10.67	11.26	11.91	12.65	13.52
HPI88964	**1.0**	4	0.8	12	50	0.95	4.85	12.77	13.48	14.26	15.01	15.85
HPI88965	**1.0**	4	0.8	14	50	0.95	4.36	14.88	15.70	16.61	17.22	18.19
HPI88966	**1.0**	4	0.8	16	60	0.95	3.96	16.98	17.92	18.93	19.43	20.53
HPI88967	**1.0**	4	0.8	18	60	0.95	3.62	19.09	20.13	21.09	21.65	22.86
HPI88968	**1.0**	4	0.8	20	60	0.95	3.34	21.19	22.35	23.24	23.86	25.20

NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE SQUARE for RIB PROCESSING


SERIES

PLAIN SHANK **HPI88**

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



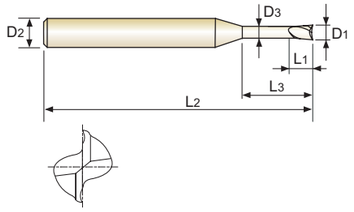






P. 56-62

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI88969	**1.0**	4	0.8	22	60	0.95	3.10	23.29	24.57	25.40	26.07	27.53
HPI88012	**1.2**	4	1	6	50	1.15	7.05	6.30	6.52	6.75	7.01	7.57
HPI88970	**1.2**	4	1	8	50	1.15	6.00	8.37	8.66	8.97	9.31	10.06
HPI88971	**1.2**	4	1	10	50	1.15	5.22	10.43	10.80	11.19	11.61	12.55
HPI88972	**1.2**	4	1	12	50	1.15	4.62	12.50	12.94	13.40	13.91	15.03
HPI88973	**1.2**	4	1	16	60	1.15	3.76	16.64	17.21	17.84	18.50	20.01
HPI88014	**1.4**	4	1.1	6	50	1.35	6.77	6.30	6.52	6.75	7.01	7.57
HPI88974	**1.4**	4	1.1	12	50	1.35	4.39	12.50	12.94	13.40	13.91	15.03
HPI88015	**1.5**	4	1.2	4	50	1.45	8.12	4.23	4.38	4.54	4.71	5.09
HPI88975	**1.5**	4	1.2	6	50	1.45	6.63	6.30	6.52	6.75	7.01	7.57
HPI88976	**1.5**	4	1.2	8	50	1.45	5.60	8.37	8.66	8.97	9.31	10.06
HPI88977	**1.5**	4	1.2	10	50	1.45	4.84	10.43	10.80	11.19	11.61	12.55
HPI88978	**1.5**	4	1.2	12	50	1.45	4.27	12.50	12.94	13.40	13.91	15.03
HPI88979	**1.5**	4	1.2	14	60	1.45	3.81	14.57	15.08	15.62	16.21	17.52
HPI88980	**1.5**	4	1.2	16	60	1.45	3.45	16.64	17.21	17.84	18.50	20.01
HPI88981	**1.5**	4	1.2	18	60	1.45	3.14	18.70	19.35	20.05	20.80	22.49
HPI88982	**1.5**	4	1.2	20	60	1.45	2.89	20.77	21.49	22.27	23.10	-
HPI88983	**1.5**	4	1.2	25	70	1.45	2.41	25.94	26.84	27.81	28.85	-
HPI88984	**1.5**	4	1.2	30	70	1.45	2.06	31.11	32.19	33.35	34.60	-
HPI88985	**1.5**	4	1.2	35	80	1.45	1.80	36.27	37.54	38.89	-	-
HPI88016	**1.6**	4	1.3	6	50	1.55	6.48	6.30	6.52	6.75	7.01	7.57
HPI88986	**1.6**	4	1.3	8	50	1.55	5.45	8.37	8.66	8.97	9.31	10.06
HPI88018	**1.8**	4	1.4	6	50	1.75	6.16	6.30	6.52	6.75	7.01	7.57
HPI88987	**1.8**	4	1.4	8	50	1.75	5.15	8.37	8.66	8.97	9.31	10.06
HPI88988	**1.8**	4	1.4	10	50	1.75	4.43	10.43	10.80	11.19	11.61	12.55
HPI88989	**1.8**	4	1.4	12	50	1.75	3.88	12.50	12.94	13.40	13.91	15.03

NEXT PAGE ▶

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE SQUARE for RIB PROCESSING


SERIES

PLAIN SHANK HPI88

- Improvement of tool life by applying new coating
- Application of tight tolerances for precision machining



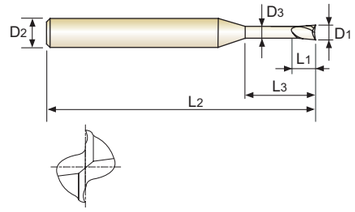






P. 56-62

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI88990	**1.8**	4	1.4	14	50	1.75	3.46	14.57	15.08	15.62	16.21	17.52
HPI88991	**1.8**	4	1.4	16	60	1.75	3.12	16.64	17.21	17.84	18.50	20.01
HPI88992	**1.8**	4	1.4	18	60	1.75	2.84	18.70	19.35	20.05	20.80	-
HPI88020	**2.0**	4	1.6	4	50	1.95	7.28	4.23	4.38	4.54	4.71	5.09
HPI88993	**2.0**	4	1.6	6	50	1.95	5.81	6.30	6.52	6.75	7.01	7.57
HPI88994	**2.0**	4	1.6	8	50	1.95	4.83	8.37	8.66	8.97	9.31	10.06
HPI88995	**2.0**	4	1.6	10	50	1.95	4.14	10.43	10.80	11.19	11.61	12.55
HPI88996	**2.0**	4	1.6	12	50	1.95	3.62	12.50	12.94	13.40	13.91	15.03
HPI88997	**2.0**	4	1.6	14	60	1.95	3.21	14.57	15.08	15.62	16.21	17.52
HPI88998	**2.0**	4	1.6	16	60	1.95	2.89	16.64	17.21	17.84	18.50	-
HPI88999	**2.0**	4	1.6	18	60	1.95	2.62	18.70	19.35	20.05	20.80	-
HPI88801	**2.0**	4	1.6	20	60	1.95	2.40	20.77	21.49	22.27	23.10	-
HPI88802	**2.0**	4	1.6	25	70	1.95	1.99	25.94	26.84	27.81	-	-
HPI88803	**2.0**	4	1.6	30	70	1.95	1.69	31.11	32.19	33.35	-	-
HPI88804	**2.0**	4	1.6	35	80	1.95	1.48	36.27	37.54	-	-	-
HPI88805	**2.0**	4	1.6	40	90	1.95	1.31	41.44	42.89	-	-	-
HPI88806	**2.0**	4	1.6	50	100	1.95	1.06	51.78	53.58	-	-	-
HPI88025	**2.5**	4	2	8	50	2.4	3.91	8.46	8.76	9.07	9.41	10.18
HPI88807	**2.5**	4	2	12	50	2.4	2.87	12.60	13.04	13.51	14.01	-
HPI88808	**2.5**	4	2	16	60	2.4	2.26	16.73	17.31	17.94	18.61	-
HPI88809	**2.5**	4	2	20	60	2.4	1.87	20.87	21.59	22.37	-	-
HPI88810	**2.5**	4	2	30	70	2.4	1.30	31.20	32.29	-	-	-
HPI88811	**2.5**	4	2	40	90	2.4	1.00	41.54	-	-	-	-
HPI88812	**2.5**	4	2	50	100	2.4	0.81	51.88	-	-	-	-
HPI88030	**3.0**	6	4.5	8	50	2.85	6.17	8.56	8.86	9.18	9.52	10.29
HPI88813	**3.0**	6	4.5	12	50	2.85	4.80	12.69	13.14	13.61	14.12	15.27

NEXT PAGE ▶

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

C-COATED SOLID CARBIDE END MILLS


2 FLUTE SQUARE for RIB PROCESSING


SERIES

PLAIN SHANK **HPI88**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining



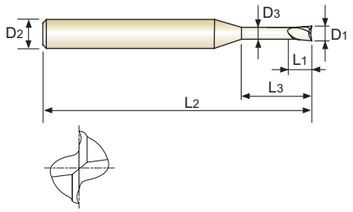




P. 56-62

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	D_1	D_2	L_1	L_3	L_2	D_3		0.5°	1°	1.5°	2°	3°
HPI88814	3.0	6	4.5	16	60	2.85	3.92	16.83	17.41	18.04	18.72	20.24
HPI88815	3.0	6	4.5	20	60	2.85	3.32	20.96	21.69	22.48	23.32	25.21
HPI88816	3.0	6	4.5	25	70	2.85	2.78	26.13	27.04	28.02	29.07	-
HPI88817	3.0	6	4.5	30	70	2.85	2.39	31.30	32.39	33.56	34.82	-
HPI88040	4.0	6	6	12	60	3.85	3.57	12.69	13.14	13.61	14.12	15.27
HPI88818	4.0	6	6	16	60	3.85	2.86	16.83	17.41	18.04	18.72	-
HPI88819	4.0	6	6	20	70	3.85	2.38	20.96	21.69	22.48	23.32	-
HPI88820	4.0	6	6	30	80	3.85	1.68	31.30	32.39	33.56	-	-
HPI88821	4.0	6	6	40	90	3.85	1.30	41.64	43.09	-	-	-
HPI88822	4.0	6	6	50	100	3.85	1.06	51.97	53.78	-	-	-
HPI88050	5.0	6	7.5	20	70	4.85	1.29	20.96	21.69	-	-	-
HPI88823	5.0	6	7.5	30	80	4.85	0.89	31.30	-	-	-	-
HPI88824	5.0	6	7.5	40	90	4.85	0.68	41.64	-	-	-	-
HPI88825	5.0	6	7.5	50	100	4.85	0.55	51.97	-	-	-	-
HPI88060	6.0	6	9	20	70	5.85	0.00	-	-	-	-	-
HPI88826	6.0	6	9	30	80	5.85	0.00	-	-	-	-	-
HPI88827	6.0	6	9	40	90	5.85	0.00	-	-	-	-	-
HPI88828	6.0	6	9	50	100	5.85	0.00	-	-	-	-	-

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4



Enforced Cutting Edge

◎ : Excellent ○ : Good


ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○		○	○									

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	○	◎


HPI90 SERIES 2 FLUTE BALL NOSE

RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)																
						0.2	0.3	0.4	0.5	0.6	0.8	1.0	1.5	2.0	2.5	3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0
P	5	Non-alloy steel	0.05D	0.02D	Vc	31	46	67	82	98	129	160	242	319	320	319	324	299	268	288	299	268	288	288
					fz	0.012	0.015	0.019	0.024	0.029	0.039	0.048	0.054	0.057	0.074	0.091	0.120	0.156	0.174	0.189	0.199	0.212	0.238	0.264
					RPM	49178	49178	53277	52458	51911	51228	50818	51365	50818	40685	33879	25819	19016	14207	11475	9508	7104	5737	4590
					FEED	1180	1475	2025	2518	3011	3995	4878	5548	5794	5979	6166	6196	5933	4944	4337	3784	3012	2732	2424
	8~9	Low alloy steel	0.05D	0.02D	Vc	31	46	67	82	98	129	160	242	319	320	319	324	299	268	288	299	268	288	288
					Fz	0.012	0.015	0.019	0.024	0.029	0.039	0.048	0.054	0.057	0.074	0.091	0.120	0.156	0.174	0.189	0.199	0.212	0.238	0.264
					RPM	49178	49178	53277	52458	51911	51228	50818	51365	50818	40685	33879	25819	19016	14207	11475	9508	7104	5737	4590
					FEED	1180	1475	2025	2518	3011	3995	4878	5548	5794	5979	6166	6196	5933	4944	4337	3784	3012	2732	2424
	11.1	High alloyed steel, and tool steel	0.05D	0.02D	Vc	31	46	67	82	98	129	160	242	319	320	319	324	299	268	288	299	268	288	288
					fz	0.012	0.015	0.019	0.024	0.029	0.039	0.048	0.054	0.057	0.074	0.091	0.120	0.156	0.174	0.189	0.199	0.212	0.238	0.264
					RPM	49178	49178	53277	52458	51911	51228	50818	51365	50818	40685	33879	25819	19016	14207	11475	9508	7104	5737	4590
					FEED	1180	1475	2025	2518	3011	3995	4878	5548	5794	5979	6166	6196	5933	4944	4337	3784	3012	2732	2424
	11.2		0.05D	0.02D	Vc	31	46	67	82	98	129	160	232	309	309	309	309	288	263	278	288	257	278	278
					fz	0.011	0.014	0.017	0.021	0.025	0.033	0.042	0.047	0.050	0.066	0.083	0.111	0.138	0.153	0.164	0.174	0.187	0.206	0.227
					RPM	49178	49178	53277	52458	51911	51228	50818	49178	49178	39295	32786	24589	18360	13934	11065	9180	6830	5532	4426
					FEED	1082	1377	1812	2203	2596	3381	4268	4623	4918	5180	5443	5459	5068	4264	3630	3195	2554	2279	2010
H	38.1	Hardened steel	0.05D	0.02D	Vc	31	46	67	82	98	129	160	232	309	309	309	309	288	263	278	288	257	278	278
					fz	0.011	0.014	0.017	0.021	0.025	0.033	0.042	0.047	0.050	0.066	0.083	0.111	0.138	0.153	0.164	0.174	0.187	0.206	0.227
					RPM	49178	49178	53277	52458	51911	51228	50818	49178	49178	39295	32786	24589	18360	13934	11065	9180	6830	5532	4426
					FEED	1082	1377	1812	2203	2596	3381	4268	4623	4918	5180	5443	5459	5068	4264	3630	3195	2554	2279	2010
	38.2		0.05D	0.02D	Vc	29	41	57	72	88	118	144	211	258	257	258	257	242	211	232	242	216	232	232
					fz	0.010	0.013	0.017	0.021	0.024	0.033	0.042	0.047	0.050	0.063	0.075	0.100	0.125	0.141	0.150	0.160	0.170	0.189	0.208
					RPM	45900	43714	45081	45900	46447	47130	45900	44807	40983	32754	27322	20491	15410	11202	9221	7704	5737	4610	3688
					FEED	918	1136	1533	1928	2230	3111	3855	4212	4098	4098	4098	4098	3852	3159	2767	2466	1951	1743	1535
	39.1		0.05D	0.02D	Vc	26	41	52	67	77	103	129	180	227	227	227	227	216	196	206	211	196	206	206
					fz	0.010	0.012	0.015	0.019	0.023	0.030	0.038	0.042	0.045	0.056	0.067	0.090	0.113	0.125	0.134	0.144	0.155	0.169	0.188
					RPM	40983	43714	40983	42621	40983	40983	40983	38250	36064	28840	24043	18032	13770	10382	8197	6721	5191	4098	3278
					FEED	820	1050	1230	1619	1885	2459	3115	3213	3246	3233	3222	3246	3112	2596	2197	1935	1609	1385	1233
	39.2		0.05D	0.02D	Vc	21	36	46	57	67	93	113	160	206	206	206	206	185	170	180	185	170	180	180
					fz	0.010	0.012	0.015	0.019	0.023	0.030	0.037	0.041	0.044	0.055	0.067	0.088	0.111	0.122	0.132	0.142	0.142	0.143	0.143
					RPM	32786	38250	36884	36064	35519	36884	36064	33879	32786	26265	21858	16392	11803	9017	7172	5902	4508	3586	2869
					FEED	656	918	1106	1371	1634	2213	2669	2778	2885	2907	2929	2885	2620	2200	1893	1676	1280	1026	821
	39.3		0.05D	0.02D	Vc	21	31	41	52	62	82	113	144	185	185	185	185	170	155	170	170	154	165	165
					fz	0.009	0.011	0.014	0.017	0.022	0.029	0.033	0.039	0.040	0.051	0.061	0.079	0.100	0.109	0.119	0.130	0.131	0.133	0.129
					RPM	32786	32786	32786	32786	32786	32786	36064	30600	29507	23587	19672	14754	10819	8197	6762	5410	4098	3278	2622
					FEED	590	721	918	1114	1443	1901	2380	2387	2361	2380	2400	2331	2164	1787	1609	1407	1073	872	677
	40	Chilled Cast Iron	0.05D	0.02D	Vc	31	46	67	82	98	129	160	232	309	309	309	309	288	263	278	288	257	278	278
					fz	0.011	0.014	0.017	0.021	0.025	0.033	0.042	0.047	0.050	0.066	0.083	0.111	0.138	0.153	0.164	0.174	0.187	0.206	0.227
					RPM	49178	49178	53277	52458	51911	51228	50818	49178	49178	39295	32786	24589	18360	13934	11065	9180	6830	5532	4426
					FEED	1082	1377	1812	2203	2596	3381	4268	4623	4918	5180	5443	5459	5068	4264	3630	3195	2554	2279	2010
	41	Hardened Cast Iron	0.05D	0.02D	Vc	29	41	57	72	88	118	144	211	258	257	258	257	242	211	232	242	216	232	232
					fz	0.010	0.013	0.017	0.021	0.024	0.033	0.042	0.047	0.050	0.063	0.075	0.100	0.125	0.141	0.150	0.160	0.170	0.189	0.208
					RPM	45900	43714	45081	45900	46447	47130	45900	44807	40983	32754	27322	20491	15410	11202	9221	7704	5737	4610	3688
					FEED	918	1136	1533	1928	2230	3111	3855	4212	4098	4098	4098	4098	3852	3159	2767	2466	1951	1743	1535



HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

ISO	VDI 3323	Material Description	Para-meter	Diameter (Ø)																	
				0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3
				L.B.S	0.3	0.5	0.75	1	1.25	1.5	1.75	2	2.5	3	5	0.5	0.6	0.75	1	1.25	1.5	1.75
P	5	Non-alloy steel	Vc	31	31	31	31	28	28	28	28	25	25	9	46	46	46	46	46	46	42
			fz	0.012	0.012	0.012	0.012	0.011	0.011	0.011	0.011	0.010	0.010	0.007	0.015	0.015	0.015	0.015	0.015	0.015	0.014
			RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260
			FEED	1180	1180	1180	1180	974	974	974	974	787	787	207	1475	1475	1475	1475	1475	1475	1239
			Ap	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.003	0.001	0.006	0.006	0.006	0.005	0.005	0.005	0.005
	8-9	Low alloy steel	Vc	31	31	31	31	28	28	28	28	25	25	9	46	46	46	46	46	46	42
			fz	0.012	0.012	0.012	0.012	0.011	0.011	0.011	0.011	0.010	0.010	0.007	0.015	0.015	0.015	0.015	0.015	0.015	0.014
			RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260
			FEED	1180	1180	1180	1180	974	974	974	974	787	787	207	1475	1475	1475	1475	1475	1475	1239
			Ap	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.003	0.001	0.006	0.006	0.006	0.005	0.005	0.005	0.005
	11.1	High alloyed steel, and tool steel	Vc	31	31	31	31	28	28	28	28	25	25	9	46	46	46	46	46	46	42
			fz	0.012	0.012	0.012	0.012	0.011	0.011	0.011	0.011	0.010	0.010	0.007	0.015	0.015	0.015	0.015	0.015	0.015	0.014
			RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260
			FEED	1180	1180	1180	1180	974	974	974	974	787	787	207	1475	1475	1475	1475	1475	1475	1239
			Ap	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.003	0.001	0.006	0.006	0.006	0.005	0.005	0.005	0.005
	11.2		Vc	31	31	31	31	28	28	28	28	25	25	9	46	46	46	46	46	46	42
			fz	0.011	0.011	0.011	0.011	0.010	0.010	0.010	0.010	0.009	0.009	0.007	0.014	0.014	0.014	0.014	0.014	0.014	0.013
			RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260
			FEED	1082	1082	1082	1082	885	885	885	885	708	708	207	1377	1377	1377	1377	1377	1377	1151
			Ap	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.001	0.005	0.005	0.005	0.005	0.005	0.005	0.004
H	38.1	Hardened steel	Vc	31	31	31	31	28	28	28	28	25	25	9	46	46	46	46	46	46	42
			fz	0.011	0.011	0.011	0.011	0.010	0.010	0.010	0.010	0.009	0.009	0.007	0.014	0.014	0.014	0.014	0.014	0.014	0.013
			RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260
			FEED	1082	1082	1082	1082	885	885	885	885	708	708	207	1377	1377	1377	1377	1377	1377	1151
			Ap	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.001	0.005	0.005	0.005	0.005	0.005	0.005	0.004
	38.2		Vc	29	29	29	29	26	26	26	26	23	23	9	41	41	41	41	41	41	37
			fz	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.008	0.008	0.006	0.013	0.013	0.013	0.013	0.013	0.013	0.012
			RPM	45900	45900	45900	45900	41310	41310	41310	41310	36720	36720	13770	43714	43714	43714	43714	43714	43714	39343
			FEED	918	918	918	918	744	744	744	744	588	588	165	1137	1137	1137	1137	1137	1137	944
			Ap	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.001	0.005	0.005	0.005	0.005	0.005	0.005	0.004
	39.1		Vc	26	26	26	26	23	23	23	23	21	21	8	41	41	41	41	41	41	37
			fz	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.008	0.008	0.006	0.012	0.012	0.012	0.012	0.012	0.012	0.011
			RPM	40983	40983	40983	40983	36885	36885	36885	36885	32786	32786	12295	43714	43714	43714	43714	43714	43714	39343
			FEED	820	820	820	820	664	664	664	664	525	525	148	1049	1049	1049	1049	1049	1049	866
			Ap	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.001	0.005	0.005	0.005	0.004	0.004	0.004	0.004
	39.2		Vc	21	21	21	21	19	19	19	19	16	16	6	36	36	36	36	36	36	32
			fz	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.008	0.008	0.006	0.012	0.012	0.012	0.012	0.012	0.012	0.011
			RPM	32786	32786	32786	32786	29507	29507	29507	29507	26229	26229	9836	38250	38250	38250	38250	38250	38250	34425
			FEED	656	656	656	656	531	531	531	531	420	420	118	918	918	918	918	918	918	757
			Ap	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.001	0.005	0.005	0.005	0.004	0.004	0.004	0.004
	39.3		Vc	21	21	21	21	19	19	19	19	16	16	6	31	31	31	31	31	31	28
			fz	0.009	0.009	0.009	0.009	0.008	0.008	0.008	0.008	0.007	0.007	0.005	0.011	0.011	0.011	0.011	0.011	0.011	0.010
			RPM	32786	32786	32786	32786	29507	29507	29507	29507	26229	26229	9836	32786	32786	32786	32786	32786	32786	29507
			FEED	590	590	590	590	472	472	472	472	367	367	98	721	721	721	721	721	721	590
			Ap	0.003	0.003	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.001	0.004	0.004	0.004	0.004	0.004	0.004	0.003
	40	Chilled Cast Iron	Vc	31	31	31	31	28	28	28	28	25	25	9	46	46	46	46	46	46	42
			fz	0.011	0.011	0.011	0.011	0.010	0.010	0.010	0.010	0.009	0.009	0.007	0.014	0.014	0.014	0.014	0.014	0.014	0.013
			RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260
			FEED	1082	1082	1082	1082	885	885	885	885	708	708	207	1377	1377	1377	1377	1377	1377	1151
			Ap	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.001	0.005	0.005	0.005	0.005	0.005	0.005	0.004
	41	Hardened Cast Iron	Vc	29	29	29	29	26	26	26	26	23	23	9	41	41	41	41	41	41	37
			fz	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.008	0.008	0.006	0.013	0.013	0.013	0.013	0.013	0.013	0.012
			RPM	45900	45900	45900	45900	41310	41310	41310	41310	36720	36720	13770	43714	43714	43714	43714	43714	43714	39343
			FEED	918	918	918	918	744	744	744	744	588	588	165	1137	1137	1137	1137	1137	1137	944
			Ap	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.001	0.005	0.005	0.005	0.005	0.005	0.005	0.004

NEXT PAGE ▶

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

VDI 3323	Para-meter	Diameter (Ø)																								
		0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.5
	L.B.S	2	2.25	2.5	3	3.5	4	5	7	0.5	0.8	1	1.5	2	2.5	3	3.5	4	4.5	5	6	7	1
5	Vc	42	42	42	42	37	37	28	14	67	67	67	67	67	60	60	60	60	54	54	54	40	82
	fz	0.014	0.014	0.014	0.014	0.012	0.012	0.011	0.009	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.024
	RPM	44260	44260	44260	44260	39342	39342	29507	14753	53277	53277	53277	53277	53277	47949	47949	47949	47949	42622	42622	42622	31966	52458
	FEED	1239	1239	1239	1239	944	944	649	266	2025	2025	2025	2025	2025	1630	1630	1630	1630	1279	1279	1279	831	2518
	Ap	0.005	0.005	0.004	0.004	0.004	0.004	0.003	0.002	0.008	0.008	0.008	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.004	0.010
8-9	Vc	42	42	42	42	37	37	28	14	67	67	67	67	67	60	60	60	60	54	54	54	40	82
	fz	0.014	0.014	0.014	0.014	0.012	0.012	0.011	0.009	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.024
	RPM	44260	44260	44260	44260	39342	39342	29507	14753	53277	53277	53277	53277	53277	47949	47949	47949	47949	42622	42622	42622	31966	52458
	FEED	1239	1239	1239	1239	944	944	649	266	2025	2025	2025	2025	2025	1630	1630	1630	1630	1279	1279	1279	831	2518
	Ap	0.005	0.005	0.004	0.004	0.004	0.004	0.003	0.002	0.008	0.008	0.008	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.004	0.010
11.1	Vc	42	42	42	42	37	37	28	14	67	67	67	67	67	60	60	60	60	54	54	54	40	82
	fz	0.014	0.014	0.014	0.014	0.012	0.012	0.011	0.009	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.024
	RPM	44260	44260	44260	44260	39342	39342	29507	14753	53277	53277	53277	53277	53277	47949	47949	47949	47949	42622	42622	42622	31966	52458
	FEED	1239	1239	1239	1239	944	944	649	266	2025	2025	2025	2025	2025	1630	1630	1630	1630	1279	1279	1279	831	2518
	Ap	0.005	0.005	0.004	0.004	0.004	0.004	0.003	0.002	0.008	0.008	0.008	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.004	0.010
11.2	Vc	42	42	42	42	37	37	28	14	67	67	67	67	67	60	60	60	60	54	54	54	40	82
	fz	0.013	0.013	0.013	0.013	0.011	0.011	0.010	0.008	0.017	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.015	0.014	0.014	0.014	0.012	0.021
	RPM	44260	44260	44260	44260	39342	39342	29507	14753	53277	53277	53277	53277	53277	47949	47949	47949	47949	42622	42622	42622	31966	52458
	FEED	1151	1151	1151	1151	866	866	590	236	1811	1811	1811	1811	1811	1438	1438	1438	1438	1193	1193	1193	767	2203
	Ap	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.001	0.007	0.007	0.007	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.005	0.004	0.003	0.009
38.1	Vc	42	42	42	42	37	37	28	14	67	67	67	67	67	60	60	60	60	54	54	54	40	82
	fz	0.013	0.013	0.013	0.013	0.011	0.011	0.010	0.008	0.017	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.015	0.014	0.014	0.014	0.012	0.021
	RPM	44260	44260	44260	44260	39342	39342	29507	14753	53277	53277	53277	53277	53277	47949	47949	47949	47949	42622	42622	42622	31966	52458
	FEED	1151	1151	1151	1151	866	866	590	236	1811	1811	1811	1811	1811	1438	1438	1438	1438	1193	1193	1193	767	2203
	Ap	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.001	0.007	0.007	0.007	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.005	0.004	0.003	0.009
38.2	Vc	37	37	37	37	33	33	25	12	57	57	57	57	57	51	51	51	51	45	45	45	34	72
	fz	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.008	0.017	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.015	0.014	0.014	0.014	0.012	0.021
	RPM	39343	39343	39343	39343	34971	34971	26228	13114	45081	45081	45081	45081	45081	40573	40573	40573	40573	36065	36065	36065	27049	45900
	FEED	944	944	944	944	699	699	472	210	1533	1533	1533	1533	1533	1217	1217	1217	1217	1010	1010	1010	649	1928
	Ap	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.001	0.007	0.007	0.007	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.005	0.004	0.003	0.009
39.1	Vc	37	37	37	37	33	33	25	12	52	52	52	52	52	46	46	46	46	41	41	41	31	67
	fz	0.011	0.011	0.011	0.011	0.010	0.010	0.008	0.007	0.015	0.015	0.015	0.015	0.015	0.014	0.014	0.014	0.014	0.012	0.012	0.012	0.011	0.019
	RPM	39343	39343	39343	39343	34971	34971	26228	13114	40983	40983	40983	40983	40983	36885	36885	36885	36885	32786	32786	32786	24590	42621
	FEED	866	866	866	866	699	699	420	184	1229	1229	1229	1229	1229	1033	1033	1033	1033	787	787	787	541	1620
	Ap	0.004	0.004	0.003	0.003	0.003	0.003	0.002	0.001	0.006	0.006	0.006	0.006	0.006	0.005	0.005	0.004	0.004	0.004	0.004	0.004	0.003	0.008
39.2	Vc	32	32	32	32	29	29	22	11	46	46	46	46	46	42	42	42	42	37	37	37	28	57
	fz	0.011	0.011	0.011	0.011	0.010	0.010	0.008	0.007	0.015	0.015	0.015	0.015	0.015	0.014	0.014	0.014	0.014	0.012	0.012	0.012	0.011	0.019
	RPM	34425	34425	34425	34425	30600	30600	22950	11475	36884	36884	36884	36884	36884	33196	33196	33196	33196	29507	29507	29507	22130	36064
	FEED	757	757	757	757	612	612	367	161	1107	1107	1107	1107	1107	929	929	929	929	708	708	708	487	1370
	Ap	0.004	0.004	0.003	0.003	0.003	0.003	0.002	0.001	0.006	0.006	0.006	0.006	0.006	0.005	0.005	0.005	0.004	0.004	0.004	0.004	0.003	0.008
39.3	Vc	28	28	28	28	25	25	19	9	41	41	41	41	41	37	37	37	37	33	33	33	25	52
	fz	0.010	0.010	0.010	0.010	0.009	0.009	0.008	0.007	0.014	0.014	0.014	0.014	0.014	0.013	0.013	0.013	0.013	0.011	0.011	0.011	0.010	0.017
	RPM	29507	29507	29507	29507	26229	26229	19672	9836	32786	32786	32786	32786	32786	29507	29507	29507	29507	26229	26229	26229	19672	32786
	FEED	590	590	590	590	472	472	315	138	918	918	918	918	918	767	767	767	767	577	577	577	393	1115
	Ap	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.001	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.007
40	Vc	42	42	42	42	37	37	28	14	67	67	67	67	67	60	60	60	60	54	54	54	40	82
	fz	0.013	0.013	0.013	0.013	0.011	0.011	0.010	0.008	0.017	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.015	0.014	0.014	0.014	0.012	0.021
	RPM	44260	44260	44260	44260	39342	39342	29507	14753	53277	53277	53277	53277	53277	47949	47949	47949	47949	42622	42622	42622	31966	52458
	FEED	1151	1151	1151	1151	866	866	590	236	1811	1811	1811	1811	1811	1438	1438	1438	1438	1193	1193	1193	767	2203
	Ap	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.001	0.007	0.007	0.007	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.005	0.004	0.003	0.009
41	Vc	37	37	37	37	33	33	25	12	57	57	57	57	57	51	51	51	51	45	45	45	34	72
	fz	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.008	0.017	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.015	0.014	0.014	0.014	0.012	0.021
	RPM	39343	39343	39343	39343	34971	34971	26228	13114	45081	45081	45081	45081	45081	40573	40573	40573	40573	36065	36065	36065	27049	45900
	FEED	944	944	944	944	699	699	472	210	1533	1533	1533	1533	1533	1217	1217	1217	1217	1010	1010	1010	649	1928
	Ap	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.001	0.007	0.007	0.007	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.005	0.004	0.003	0.009

NEXT PAGE ▶

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

ISO	VDI 3323	Para-meter	Diameter (Ø)																				
			0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		L.B.S	1.25	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6	8	10	1	1.5	2	2.5	3	3.5	4	4.5
P	5	Vc	82	82	82	82	74	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88
		fz	0.024	0.024	0.024	0.024	0.022	0.022	0.022	0.022	0.022	0.019	0.019	0.017	0.017	0.029	0.029	0.029	0.029	0.029	0.026	0.026	0.026
		RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720
		FEED	2518	2518	2518	2518	2077	2077	2077	2077	2077	1595	1595	1070	1070	3011	3011	3011	3011	3011	2429	2429	2429
		Ap	0.010	0.010	0.009	0.009	0.008	0.008	0.008	0.007	0.007	0.007	0.007	0.007	0.005	0.012	0.012	0.011	0.011	0.011	0.010	0.010	0.010
	8-9	Vc	82	82	82	82	74	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88
		fz	0.024	0.024	0.024	0.024	0.022	0.022	0.022	0.022	0.022	0.019	0.019	0.017	0.017	0.029	0.029	0.029	0.029	0.029	0.026	0.026	0.026
		RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720
		FEED	2518	2518	2518	2518	2077	2077	2077	2077	2077	1595	1595	1070	1070	3011	3011	3011	3011	3011	2429	2429	2429
		Ap	0.010	0.010	0.009	0.009	0.008	0.008	0.008	0.007	0.007	0.007	0.007	0.007	0.005	0.012	0.012	0.011	0.011	0.011	0.010	0.010	0.010
	11.1	Vc	82	82	82	82	74	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88
		fz	0.024	0.024	0.024	0.024	0.022	0.022	0.022	0.022	0.022	0.019	0.019	0.017	0.017	0.029	0.029	0.029	0.029	0.029	0.026	0.026	0.026
		RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720
		FEED	2518	2518	2518	2518	2077	2077	2077	2077	2077	1595	1595	1070	1070	3011	3011	3011	3011	3011	2429	2429	2429
		Ap	0.010	0.010	0.009	0.009	0.008	0.008	0.008	0.007	0.007	0.007	0.007	0.007	0.005	0.012	0.012	0.011	0.011	0.011	0.010	0.010	0.010
	11.2	Vc	82	82	82	82	74	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88
		fz	0.021	0.021	0.021	0.021	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.015	0.015	0.025	0.025	0.025	0.025	0.025	0.023	0.023	0.023
		RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720
		FEED	2203	2203	2203	2203	1794	1794	1794	1794	1794	1427	1427	944	944	2596	2596	2596	2596	2596	2149	2149	2149
		Ap	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.004	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.008
H	38.1	Vc	82	82	82	82	74	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88
		fz	0.021	0.021	0.021	0.021	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.015	0.015	0.025	0.025	0.025	0.025	0.025	0.023	0.023	0.023
		RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720
		FEED	2203	2203	2203	2203	1794	1794	1794	1794	1794	1427	1427	944	944	2596	2596	2596	2596	2596	2149	2149	2149
		Ap	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.004	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.008
	38.2	Vc	72	72	72	72	65	65	65	65	65	58	58	43	43	88	88	88	88	88	79	79	79
		fz	0.021	0.021	0.021	0.021	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.015	0.015	0.024	0.024	0.024	0.024	0.024	0.022	0.022	0.022
		RPM	45900	45900	45900	45900	41310	41310	41310	41310	41310	36720	36720	27540	27540	46447	46447	46447	46447	46447	41802	41802	41802
		FEED	1928	1928	1928	1928	1570	1570	1570	1570	1570	1248	1248	826	826	2229	2229	2229	2229	2229	1839	1839	1839
		Ap	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.004	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.008
	39.1	Vc	67	67	67	67	60	60	60	60	60	54	54	40	40	77	77	77	77	77	70	70	70
		fz	0.019	0.019	0.019	0.019	0.017	0.017	0.017	0.017	0.017	0.015	0.015	0.013	0.013	0.023	0.023	0.023	0.023	0.023	0.021	0.021	0.021
		RPM	42621	42621	42621	42621	38359	38359	38359	38359	38359	34097	34097	25573	25573	40983	40983	40983	40983	40983	36885	36885	36885
		FEED	1620	1620	1620	1620	1304	1304	1304	1304	1304	1023	1023	665	665	1885	1885	1885	1885	1885	1549	1549	1549
		Ap	0.008	0.008	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.004	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.008
	39.2	Vc	57	57	57	57	51	51	51	51	51	45	45	34	34	67	67	67	67	67	60	60	60
		fz	0.019	0.019	0.019	0.019	0.017	0.017	0.017	0.017	0.017	0.015	0.015	0.013	0.013	0.023	0.023	0.023	0.023	0.023	0.021	0.021	0.021
		RPM	36064	36064	36064	36064	32458	32458	32458	32458	32458	28851	28851	21638	21638	35519	35519	35519	35519	35519	31967	31967	31967
		FEED	1370	1370	1370	1370	1104	1104	1104	1104	1104	866	866	563	563	1634	1634	1634	1634	1634	1343	1343	1343
		Ap	0.008	0.008	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.004	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.008
	39.3	Vc	52	52	52	52	46	46	46	46	46	41	41	31	31	62	62	62	62	62	56	56	56
		fz	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.015	0.015	0.014	0.014	0.012	0.012	0.022	0.022	0.022	0.022	0.022	0.020	0.020	0.020
		RPM	32786	32786	32786	32786	29507	29507	29507	29507	29507	26229	26229	19672	19672	32786	32786	32786	32786	32786	29507	29507	29507
		FEED	1115	1115	1115	1115	885	885	885	885	885	734	734	472	472	1443	1443	1443	1443	1443	1180	1180	1180
		Ap	0.007	0.007	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.004	0.003	0.008	0.008	0.007	0.007	0.007	0.006	0.006	0.006
	40	Vc	82	82	82	82	74	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88
		fz	0.021	0.021	0.021	0.021	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.015	0.015	0.025	0.025	0.025	0.025	0.025	0.023	0.023	0.023
		RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720
		FEED	2203	2203	2203	2203	1794	1794	1794	1794	1794	1427	1427	944	944	2596	2596	2596	2596	2596	2149	2149	2149
		Ap	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.004	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.008
	41	Vc	72	72	72	72	65	65	65	65	65	58	58	43	43	88	88	88	88	88	79	79	79
		fz	0.021	0.021	0.021	0.021	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.015	0.015	0.024	0.024	0.024	0.024	0.024	0.022	0.022	0.022
		RPM	45900	45900	45900	45900	41310	41310	41310	41310	41310	36720	36720	27540	27540	46447	46447	46447	46447	46447	41802	41802	41802
		FEED	1928	1928	1928	1928	1570	1570	1570	1570	1570	1248	1248	826	826	2229	2229	2229	2229	2229	1839	1839	1839
		Ap	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.004	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.008

NEXT PAGE ▶

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

VDI 3323	Para-meter	Diameter (Ø)																					
		0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9
	L.B.S	5	5.5	6	7	8	9	10	12	2	4	6	8	2	3	4	5	6	7	8	10	12	2
5	Vc	88	88	88	78	78	78	59	59	114	103	103	91	129	129	129	116	116	116	116	103	103	145
	fz	0.026	0.026	0.026	0.023	0.023	0.023	0.020	0.020	0.029	0.026	0.026	0.023	0.039	0.039	0.039	0.035	0.035	0.035	0.035	0.031	0.031	0.039
	RPM	46720	46720	46720	41529	41529	41529	31147	31147	51911	46720	46720	41529	51228	51228	51228	46105	46105	46105	46105	40982	40982	51228
	FEED	2429	2429	2429	1910	1910	1910	1246	1246	3011	2429	2429	1910	3996	3996	3996	3227	3227	3227	3227	2541	2541	3996
	Ap	0.008	0.008	0.008	0.008	0.008	0.008	0.006	0.006	0.014	0.011	0.010	0.010	0.016	0.014	0.014	0.013	0.013	0.011	0.011	0.011	0.010	0.018
8-9	Vc	88	88	88	78	78	78	59	59	114	103	103	91	129	129	129	116	116	116	116	103	103	145
	fz	0.026	0.026	0.026	0.023	0.023	0.023	0.020	0.020	0.029	0.026	0.026	0.023	0.039	0.039	0.039	0.035	0.035	0.035	0.035	0.031	0.031	0.039
	RPM	46720	46720	46720	41529	41529	41529	31147	31147	51911	46720	46720	41529	51228	51228	51228	46105	46105	46105	46105	40982	40982	51228
	FEED	2429	2429	2429	1910	1910	1910	1246	1246	3011	2429	2429	1910	3996	3996	3996	3227	3227	3227	3227	2541	2541	3996
	Ap	0.008	0.008	0.008	0.008	0.008	0.008	0.006	0.006	0.014	0.011	0.010	0.010	0.016	0.014	0.014	0.013	0.013	0.011	0.011	0.011	0.010	0.018
11.1	Vc	88	88	88	78	78	78	59	59	114	103	103	91	129	129	129	116	116	116	116	103	103	145
	fz	0.026	0.026	0.026	0.023	0.023	0.023	0.020	0.020	0.029	0.026	0.026	0.023	0.039	0.039	0.039	0.035	0.035	0.035	0.035	0.031	0.031	0.039
	RPM	46720	46720	46720	41529	41529	41529	31147	31147	51911	46720	46720	41529	51228	51228	51228	46105	46105	46105	46105	40982	40982	51228
	FEED	2429	2429	2429	1910	1910	1910	1246	1246	3011	2429	2429	1910	3996	3996	3996	3227	3227	3227	3227	2541	2541	3996
	Ap	0.008	0.008	0.008	0.008	0.008	0.008	0.006	0.006	0.014	0.011	0.010	0.010	0.016	0.014	0.014	0.013	0.013	0.011	0.011	0.011	0.010	0.018
11.2	Vc	88	88	88	78	78	78	59	59	114	103	103	91	129	129	129	116	116	116	116	103	103	145
	fz	0.023	0.023	0.023	0.020	0.020	0.020	0.018	0.018	0.025	0.023	0.023	0.020	0.033	0.033	0.033	0.030	0.030	0.030	0.030	0.026	0.026	0.033
	RPM	46720	46720	46720	41529	41529	41529	31147	31147	51911	46720	46720	41529	51228	51228	51228	46105	46105	46105	46105	40982	40982	51228
	FEED	2149	2149	2149	1661	1661	1661	1121	1121	2596	2149	2149	1661	3381	3381	3381	2766	2766	2766	2766	2131	2131	3381
	Ap	0.007	0.007	0.007	0.007	0.007	0.007	0.005	0.005	0.012	0.010	0.008	0.008	0.014	0.012	0.012	0.011	0.011	0.010	0.010	0.010	0.009	0.015
38.1	Vc	88	88	88	78	78	78	59	59	114	103	103	91	129	129	129	116	116	116	116	103	103	145
	fz	0.023	0.023	0.023	0.020	0.020	0.020	0.018	0.018	0.025	0.023	0.023	0.020	0.033	0.033	0.033	0.030	0.030	0.030	0.030	0.026	0.026	0.033
	RPM	46720	46720	46720	41529	41529	41529	31147	31147	51911	46720	46720	41529	51228	51228	51228	46105	46105	46105	46105	40982	40982	51228
	FEED	2149	2149	2149	1661	1661	1661	1121	1121	2596	2149	2149	1661	3381	3381	3381	2766	2766	2766	2766	2131	2131	3381
	Ap	0.007	0.007	0.007	0.007	0.007	0.007	0.005	0.005	0.012	0.010	0.008	0.008	0.014	0.012	0.012	0.011	0.011	0.010	0.010	0.010	0.009	0.015
38.2	Vc	79	79	79	70	70	70	53	53	102	92	92	82	118	118	118	107	107	107	107	95	95	133
	fz	0.022	0.022	0.022	0.019	0.019	0.019	0.017	0.017	0.024	0.022	0.022	0.019	0.033	0.033	0.033	0.030	0.030	0.030	0.030	0.026	0.026	0.033
	RPM	41802	41802	41802	37158	37158	37158	27868	27868	46447	41802	41802	37158	47130	47130	47130	42417	42417	42417	42417	37704	37704	47130
	FEED	1839	1839	1839	1412	1412	1412	948	948	2229	1839	1839	1412	3111	3111	3111	2545	2545	2545	2545	1961	1961	3111
	Ap	0.007	0.007	0.007	0.007	0.007	0.007	0.005	0.005	0.012	0.010	0.008	0.008	0.014	0.012	0.012	0.011	0.011	0.010	0.010	0.010	0.009	0.015
39.1	Vc	70	70	70	62	62	62	46	46	90	81	81	72	103	103	103	93	93	93	93	82	82	116
	fz	0.021	0.021	0.021	0.018	0.018	0.018	0.016	0.016	0.023	0.021	0.021	0.018	0.030	0.030	0.030	0.027	0.027	0.027	0.027	0.024	0.024	0.030
	RPM	36885	36885	36885	32786	32786	32786	24590	24590	40983	36885	36885	32786	40983	40983	40983	36885	36885	36885	36885	32786	32786	40983
	FEED	1549	1549	1549	1180	1180	1180	787	787	1885	1549	1549	1180	2459	2459	2459	1992	1992	1992	1992	1574	1574	2459
	Ap	0.007	0.007	0.007	0.007	0.006	0.006	0.005	0.005	0.011	0.009	0.008	0.008	0.013	0.012	0.012	0.010	0.010	0.009	0.009	0.009	0.008	0.014
39.2	Vc	60	60	60	54	54	54	40	40	78	70	70	62	93	93	93	83	83	83	83	74	74	104
	fz	0.021	0.021	0.021	0.018	0.018	0.018	0.016	0.016	0.023	0.021	0.021	0.018	0.030	0.030	0.030	0.027	0.027	0.027	0.027	0.024	0.024	0.030
	RPM	31967	31967	31967	28415	28415	28415	21311	21311	35519	31967	31967	28415	36884	36884	36884	33196	33196	33196	33196	29507	29507	36884
	FEED	1343	1343	1343	1023	1023	1023	682	682	1634	1343	1343	1023	2213	2213	2213	1793	1793	1793	1793	1416	1416	2213
	Ap	0.007	0.007	0.007	0.007	0.006	0.006	0.005	0.005	0.011	0.009	0.008	0.008	0.013	0.012	0.012	0.010	0.010	0.009	0.009	0.009	0.008	0.014
39.3	Vc	56	56	56	49	49	49	37	37	72	65	65	58	82	82	82	74	74	74	74	66	66	93
	fz	0.020	0.020	0.020	0.018	0.018	0.018	0.015	0.015	0.022	0.020	0.020	0.018	0.029	0.029	0.029	0.026	0.026	0.026	0.026	0.023	0.023	0.029
	RPM	29507	29507	29507	26229	26229	26229	19672	19672	32786	29507	29507	26229	32786	32786	32786	29507	29507	29507	29507	26229	26229	32786
	FEED	1180	1180	1180	944	944	944	590	590	1443	1180	1180	944	1902	1902	1902	1534	1534	1534	1534	1207	1207	1902
	Ap	0.005	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.009	0.007	0.006	0.006	0.010	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.007	0.012
40	Vc	88	88	88	78	78	78	59	59	114	103	103	91	129	129	129	116	116	116	116	103	103	145
	fz	0.023	0.023	0.023	0.020	0.020	0.020	0.018	0.018	0.025	0.023	0.023	0.020	0.033	0.033	0.033	0.030	0.030	0.030	0.030	0.026	0.026	0.033
	RPM	46720	46720	46720	41529	41529	41529	31147	31147	51911	46720	46720	41529	51228	51228	51228	46105	46105	46105	46105	40982	40982	51228
	FEED	2149	2149	2149	1661	1661	1661	1121	1121	2596	2149	2149	1661	3381	3381	3381	2766	2766	2766	2766	2131	2131	3381
	Ap	0.007	0.007	0.007	0.007	0.007	0.007	0.005	0.005	0.012	0.010	0.008	0.008	0.014	0.012	0.012	0.011	0.011	0.010	0.010	0.010	0.009	0.015
41	Vc	79	79	79	70	70	70	53	53	102	92	92	82	118	118	118	107	107	107	107	95	95	133
	fz	0.022	0.022	0.022	0.019	0.019	0.019	0.017	0.017	0.024	0.022	0.022	0.019	0.033	0.033	0.033	0.030	0.030	0.030	0.030	0.026	0.026	0.033
	RPM	41802	41802	41802	37158	37158	37158	27868	27868	46447	41802	41802	37158	47130	47130	47130	42417	42417	42417	42417	37704	37704	47130
	FEED	1839	1839	1839	1412	1412	1412	948	948	2229	1839	1839	1412	3111	3111	3111	2545	2545	2545	2545	1961	1961	3111
	Ap	0.007	0.007	0.007	0.007	0.007	0.007	0.005	0.005	0.012	0.010	0.008	0.008	0.014	0.012	0.012	0.011	0.011	0.010	0.010	0.010	0.009	0.015

NEXT PAGE ▶

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

ISO	VDI 3323	Para-meter	Diameter (Ø)																				
			0.9	0.9	0.9	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
		L.B.S	4	6	8	2	2.5	3	4	5	6	7	8	9	10	12	13	14	16	18	20	22	25
P	5	Vc	145	130	130	160	160	160	160	160	144	144	144	144	144	128	128	128	96	96	96	48	48
		fz	0.039	0.035	0.035	0.048	0.048	0.048	0.048	0.048	0.043	0.043	0.043	0.043	0.043	0.038	0.038	0.038	0.034	0.034	0.034	0.029	0.029
		RPM	51228	46105	46105	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	40654	40654	40654	30491	30491	30491	15245	15245
		FEED	3996	3227	3227	4879	4879	4879	4879	4879	3933	3933	3933	3933	3933	3090	3090	3090	2073	2073	2073	884	884
		Ap	0.016	0.014	0.013	0.020	0.020	0.020	0.018	0.018	0.016	0.016	0.016	0.014	0.014	0.014	0.014	0.013	0.013	0.010	0.010	0.005	0.005
	8-9	Vc	145	130	130	160	160	160	160	160	144	144	144	144	144	128	128	128	96	96	96	48	48
		fz	0.039	0.035	0.035	0.048	0.048	0.048	0.048	0.048	0.043	0.043	0.043	0.043	0.043	0.038	0.038	0.038	0.034	0.034	0.034	0.029	0.029
		RPM	51228	46105	46105	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	40654	40654	40654	30491	30491	30491	15245	15245
		FEED	3996	3227	3227	4879	4879	4879	4879	4879	3933	3933	3933	3933	3933	3090	3090	3090	2073	2073	2073	884	884
		Ap	0.016	0.014	0.013	0.020	0.020	0.020	0.018	0.018	0.016	0.016	0.016	0.014	0.014	0.014	0.014	0.013	0.013	0.010	0.010	0.005	0.005
	11.1	Vc	145	130	130	160	160	160	160	160	144	144	144	144	144	128	128	128	96	96	96	48	48
		fz	0.039	0.035	0.035	0.048	0.048	0.048	0.048	0.048	0.043	0.043	0.043	0.043	0.043	0.038	0.038	0.038	0.034	0.034	0.034	0.029	0.029
		RPM	51228	46105	46105	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	40654	40654	40654	30491	30491	30491	15245	15245
		FEED	3996	3227	3227	4879	4879	4879	4879	4879	3933	3933	3933	3933	3933	3090	3090	3090	2073	2073	2073	884	884
		Ap	0.016	0.014	0.013	0.020	0.020	0.020	0.018	0.018	0.016	0.016	0.016	0.014	0.014	0.014	0.014	0.013	0.013	0.010	0.010	0.005	0.005
	11.2	Vc	145	130	130	160	160	160	160	160	144	144	144	144	144	128	128	128	96	96	96	48	48
		fz	0.033	0.030	0.030	0.042	0.042	0.042	0.042	0.042	0.038	0.038	0.038	0.038	0.038	0.034	0.034	0.034	0.029	0.029	0.029	0.025	0.025
		RPM	51228	46105	46105	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	40654	40654	40654	30491	30491	30491	15245	15245
		FEED	3381	2766	2766	4269	4269	4269	4269	4269	3476	3476	3476	3476	3476	2764	2764	2764	1768	1768	1768	762	762
		Ap	0.014	0.012	0.011	0.017	0.017	0.017	0.015	0.015	0.014	0.014	0.014	0.012	0.012	0.012	0.012	0.011	0.011	0.009	0.009	0.004	0.004
H	38.1	Vc	145	130	130	160	160	160	160	160	144	144	144	144	144	128	128	128	96	96	96	48	48
		fz	0.033	0.030	0.030	0.042	0.042	0.042	0.042	0.042	0.038	0.038	0.038	0.038	0.038	0.034	0.034	0.034	0.029	0.029	0.029	0.025	0.025
		RPM	51228	46105	46105	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	40654	40654	40654	30491	30491	30491	15245	15245
		FEED	3381	2766	2766	4269	4269	4269	4269	4269	3476	3476	3476	3476	3476	2764	2764	2764	1768	1768	1768	762	762
		Ap	0.014	0.012	0.011	0.017	0.017	0.017	0.015	0.015	0.014	0.014	0.014	0.012	0.012	0.012	0.012	0.011	0.011	0.009	0.009	0.004	0.004
	38.2	Vc	133	120	120	144	144	144	144	144	130	130	130	130	130	115	115	115	87	87	87	43	43
		fz	0.033	0.030	0.030	0.042	0.042	0.042	0.042	0.042	0.038	0.038	0.038	0.038	0.038	0.034	0.034	0.034	0.029	0.029	0.029	0.025	0.025
		RPM	47130	42417	42417	45900	45900	45900	45900	45900	41310	41310	41310	41310	41310	36720	36720	36720	27540	27540	27540	13770	13770
		FEED	3111	2545	2545	3856	3856	3856	3856	3856	3140	3140	3140	3140	3140	2497	2497	2497	1597	1597	1597	689	689
		Ap	0.014	0.012	0.011	0.017	0.017	0.017	0.015	0.015	0.014	0.014	0.014	0.012	0.012	0.012	0.012	0.011	0.011	0.009	0.009	0.004	0.004
	39.1	Vc	116	104	104	129	129	129	129	129	116	116	116	116	116	103	103	103	77	77	77	39	39
		fz	0.030	0.027	0.027	0.038	0.038	0.038	0.038	0.038	0.034	0.034	0.034	0.034	0.034	0.030	0.030	0.030	0.027	0.027	0.027	0.023	0.023
		RPM	40983	36885	36885	40983	40983	40983	40983	40983	36885	36885	36885	36885	36885	32786	32786	32786	24590	24590	24590	12295	12295
		FEED	2459	1992	1992	3115	3115	3115	3115	3115	2508	2508	2508	2508	2508	1967	1967	1967	1328	1328	1328	566	566
		Ap	0.013	0.012	0.010	0.016	0.016	0.016	0.014	0.014	0.013	0.013	0.013	0.011	0.011	0.011	0.011	0.010	0.010	0.008	0.008	0.004	0.004
	39.2	Vc	104	94	94	113	113	113	113	113	102	102	102	102	102	91	91	91	68	68	68	34	34
		fz	0.030	0.027	0.027	0.037	0.037	0.037	0.037	0.037	0.033	0.033	0.033	0.033	0.033	0.030	0.030	0.030	0.026	0.026	0.026	0.022	0.022
		RPM	36884	33196	33196	36064	36064	36064	36064	36064	32458	32458	32458	32458	32458	28851	28851	28851	21638	21638	21638	10819	10819
		FEED	2213	1793	1793	2669	2669	2669	2669	2669	2142	2142	2142	2142	2142	1731	1731	1731	1125	1125	1125	476	476
		Ap	0.013	0.012	0.010	0.016	0.016	0.016	0.014	0.014	0.013	0.013	0.013	0.011	0.011	0.011	0.011	0.010	0.010	0.008	0.008	0.004	0.004
	39.3	Vc	93	83	83	113	113	113	113	113	102	102	102	102	102	91	91	91	68	68	68	34	34
		fz	0.029	0.026	0.026	0.033	0.033	0.033	0.033	0.033	0.030	0.030	0.030	0.030	0.030	0.026	0.026	0.026	0.023	0.023	0.023	0.020	0.020
		RPM	32786	29507	29507	36064	36064	36064	36064	36064	32458	32458	32458	32458	32458	28851	28851	28851	21638	21638	21638	10819	10819
		FEED	1902	1534	1534	2380	2380	2380	2380	2380	1947	1947	1947	1947	1947	1500	1500	1500	995	995	995	433	433
		Ap	0.011	0.009	0.008	0.013	0.013	0.013	0.012	0.012	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.008	0.008	0.007	0.007	0.003	0.003
	40	Vc	145	130	130	160	160	160	160	160	144	144	144	144	144	128	128	128	96	96	96	48	48
		fz	0.033	0.030	0.030	0.042	0.042	0.042	0.042	0.042	0.038	0.038	0.038	0.038	0.038	0.034	0.034	0.034	0.029	0.029	0.029	0.025	0.025
		RPM	51228	46105	46105	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	40654	40654	40654	30491	30491	30491	15245	15245
		FEED	3381	2766	2766	4269	4269	4269	4269	4269	3476	3476	3476	3476	3476	2764	2764	2764	1768	1768	1768	762	762
		Ap	0.014	0.012	0.011	0.017	0.017	0.017	0.015	0.015	0.014	0.014	0.014	0.012	0.012	0.012	0.012	0.011	0.011	0.009	0.009	0.004	0.004
	41	Vc	133	120	120	144	144	144	144	144	130	130	130	130	130	115	115	115	87	87	87	43	43
		fz	0.033	0.030	0.030	0.042	0.042	0.042	0.042	0.042	0.038	0.038	0.038	0.038	0.038	0.034	0.034	0.034	0.029	0.029	0.029	0.025	0.025
		RPM	47130	42417	42417	45900	45900	45900	45900	45900	41310	41310	41310	41310	41310	36720	36720	36720	27540	27540	27540	13770	13770
		FEED	3111	2545	2545	3856	3856	3856	3856	3856	3140	3140	3140	3140	3140	2497	2497	2497	1597	1597	1597	689	689
		Ap	0.014	0.012	0.011	0.017	0.017	0.017	0.015	0.015	0.014	0.014	0.014	0.012	0.012	0.012	0.012	0.011	0.011	0.009	0.009	0.004	0.004

NEXT PAGE ▶

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

VDI 3323	Para-meter	Diameter (Ø)																					
		1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.4	1.4	1.4	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	L.B.S	30	2.4	4	6	8	10	12	14	16	8	12	16	3	3.8	4	6	8	10	12	14	15	16
5	Vc	48	196	196	196	176	176	176	157	157	197	197	175	242	242	242	242	218	218	218	218	218	194
	fz	0.029	0.051	0.051	0.051	0.046	0.046	0.046	0.041	0.041	0.048	0.048	0.042	0.054	0.054	0.054	0.054	0.049	0.049	0.049	0.049	0.049	0.043
	RPM	15245	51911	51911	51911	46720	46720	46720	41529	41529	44814	44814	39834	51365	51365	51365	51365	46229	46229	46229	46229	46229	41092
	FEED	884	5295	5295	5295	4298	4298	4298	3405	3405	4302	4302	3346	5547	5547	5547	5547	4530	4530	4530	4530	4530	3534
	Ap	0.005	0.024	0.022	0.022	0.019	0.017	0.017	0.017	0.016	0.022	0.020	0.020	0.030	0.030	0.030	0.027	0.024	0.024	0.024	0.021	0.021	0.021
8-9	Vc	48	196	196	196	176	176	176	157	157	197	197	175	242	242	242	242	218	218	218	218	218	194
	fz	0.029	0.051	0.051	0.051	0.046	0.046	0.046	0.041	0.041	0.048	0.048	0.042	0.054	0.054	0.054	0.054	0.049	0.049	0.049	0.049	0.049	0.043
	RPM	15245	51911	51911	51911	46720	46720	46720	41529	41529	44814	44814	39834	51365	51365	51365	51365	46229	46229	46229	46229	46229	41092
	FEED	884	5295	5295	5295	4298	4298	4298	3405	3405	4302	4302	3346	5547	5547	5547	5547	4530	4530	4530	4530	4530	3534
	Ap	0.005	0.024	0.022	0.022	0.019	0.017	0.017	0.017	0.016	0.022	0.020	0.020	0.030	0.030	0.030	0.027	0.024	0.024	0.024	0.021	0.021	0.021
11.1	Vc	48	196	196	196	176	176	176	157	157	197	197	175	242	242	242	242	218	218	218	218	218	194
	fz	0.029	0.051	0.051	0.051	0.046	0.046	0.046	0.041	0.041	0.048	0.048	0.042	0.054	0.054	0.054	0.054	0.049	0.049	0.049	0.049	0.049	0.043
	RPM	15245	51911	51911	51911	46720	46720	46720	41529	41529	44814	44814	39834	51365	51365	51365	51365	46229	46229	46229	46229	46229	41092
	FEED	884	5295	5295	5295	4298	4298	4298	3405	3405	4302	4302	3346	5547	5547	5547	5547	4530	4530	4530	4530	4530	3534
	Ap	0.005	0.024	0.022	0.022	0.019	0.017	0.017	0.017	0.016	0.022	0.020	0.020	0.030	0.030	0.030	0.027	0.024	0.024	0.024	0.021	0.021	0.021
11.2	Vc	48	185	185	185	167	167	167	148	148	189	189	168	232	232	232	232	209	209	209	209	209	185
	fz	0.025	0.045	0.045	0.045	0.041	0.041	0.041	0.036	0.036	0.041	0.041	0.037	0.047	0.047	0.047	0.047	0.042	0.042	0.042	0.042	0.042	0.038
	RPM	15245	49178	49178	49178	44260	44260	44260	39342	39342	42971	42971	38197	49178	49178	49178	49178	44260	44260	44260	44260	44260	39342
	FEED	762	4426	4426	4426	3585	3585	3585	2833	2833	3558	3558	2811	4623	4623	4623	4623	3718	3718	3718	3718	3718	2990
	Ap	0.004	0.020	0.018	0.018	0.016	0.014	0.014	0.014	0.013	0.019	0.017	0.017	0.026	0.026	0.026	0.023	0.020	0.020	0.020	0.018	0.018	0.018
38.1	Vc	48	185	185	185	167	167	167	148	148	189	189	168	232	232	232	232	209	209	209	209	209	185
	fz	0.025	0.045	0.045	0.045	0.041	0.041	0.041	0.036	0.036	0.041	0.041	0.037	0.047	0.047	0.047	0.047	0.042	0.042	0.042	0.042	0.042	0.038
	RPM	15245	49178	49178	49178	44260	44260	44260	39342	39342	42971	42971	38197	49178	49178	49178	49178	44260	44260	44260	44260	44260	39342
	FEED	762	4426	4426	4426	3585	3585	3585	2833	2833	3558	3558	2811	4623	4623	4623	4623	3718	3718	3718	3718	3718	2990
	Ap	0.004	0.020	0.018	0.018	0.016	0.014	0.014	0.014	0.013	0.019	0.017	0.017	0.026	0.026	0.026	0.023	0.020	0.020	0.020	0.018	0.018	0.018
38.2	Vc	43	165	165	165	148	148	148	132	132	172	172	153	211	211	211	211	190	190	190	190	190	169
	fz	0.025	0.045	0.045	0.045	0.041	0.041	0.041	0.036	0.036	0.041	0.041	0.037	0.047	0.047	0.047	0.047	0.042	0.042	0.042	0.042	0.042	0.038
	RPM	13770	43714	43714	43714	39343	39343	39343	34971	34971	39084	39084	34742	44807	44807	44807	44807	40326	40326	40326	40326	40326	35846
	FEED	689	3934	3934	3934	3226	3226	3226	2518	2518	3205	3205	2571	4212	4212	4212	4212	3387	3387	3387	3387	3387	2724
	Ap	0.004	0.020	0.018	0.018	0.016	0.014	0.014	0.014	0.013	0.019	0.017	0.017	0.026	0.026	0.026	0.023	0.020	0.020	0.020	0.018	0.018	0.018
39.1	Vc	39	149	149	149	134	134	134	119	119	147	147	130	180	180	180	180	162	162	162	162	162	144
	fz	0.023	0.039	0.039	0.039	0.035	0.035	0.035	0.031	0.031	0.037	0.037	0.033	0.042	0.042	0.042	0.042	0.038	0.038	0.038	0.038	0.038	0.034
	RPM	12295	39616	39616	39616	35654	35654	35654	31693	31693	33354	33354	29648	38250	38250	38250	38250	34425	34425	34425	34425	34425	30600
	FEED	566	3090	3090	3090	2496	2496	2496	1965	1965	2468	2468	1957	3213	3213	3213	3213	2616	2616	2616	2616	2616	2081
	Ap	0.004	0.019	0.017	0.017	0.015	0.013	0.013	0.013	0.012	0.018	0.016	0.016	0.024	0.024	0.024	0.022	0.019	0.019	0.019	0.017	0.017	0.017
39.2	Vc	34	134	134	134	121	121	121	107	107	130	130	115	160	160	160	160	144	144	144	144	144	128
	fz	0.022	0.040	0.040	0.040	0.036	0.036	0.036	0.032	0.032	0.037	0.037	0.033	0.041	0.041	0.041	0.041	0.037	0.037	0.037	0.037	0.037	0.033
	RPM	10819	35519	35519	35519	31967	31967	31967	28415	28415	29466	29466	26192	33879	33879	33879	33879	30491	30491	30491	30491	30491	27103
	FEED	476	2842	2842	2842	2302	2302	2302	1819	1819	2180	2180	1729	2778	2778	2778	2778	2256	2256	2256	2256	2256	1789
	Ap	0.004	0.019	0.017	0.017	0.015	0.013	0.013	0.013	0.012	0.018	0.016	0.016	0.024	0.024	0.024	0.022	0.019	0.019	0.019	0.017	0.017	0.017
39.3	Vc	34	118	118	118	107	107	107	95	95	117	117	104	144	144	144	144	130	130	130	130	130	115
	fz	0.020	0.038	0.038	0.038	0.034	0.034	0.034	0.030	0.030	0.035	0.035	0.031	0.039	0.039	0.039	0.039	0.035	0.035	0.035	0.035	0.035	0.031
	RPM	10819	31420	31420	31420	28278	28278	28278	25136	25136	26601	26601	23646	30600	30600	30600	30600	27540	27540	27540	27540	27540	24480
	FEED	433	2388	2388	2388	1923	1923	1923	1508	1508	1862	1862	1466	2387	2387	2387	2387	1928	1928	1928	1928	1928	1518
	Ap	0.003	0.016	0.014	0.014	0.012	0.011	0.011	0.011	0.010	0.015	0.013	0.013	0.020	0.020	0.020	0.018	0.016	0.016	0.016	0.014	0.014	0.014
40	Vc	48	185	185	185	167	167	167	148	148	189	189	168	232	232	232	232	209	209	209	209	209	185
	fz	0.025	0.045	0.045	0.045	0.041	0.041	0.041	0.036	0.036	0.041	0.041	0.037	0.047	0.047	0.047	0.047	0.042	0.042	0.042	0.042	0.042	0.038
	RPM	15245	49178	49178	49178	44260	44260	44260	39342	39342	42971	42971	38197	49178	49178	49178	49178	44260	44260	44260	44260	44260	39342
	FEED	762	4426	4426	4426	3585	3585	3585	2833	2833	3558	3558	2811	4623	4623	4623	4623	3718	3718	3718	3718	3718	2990
	Ap	0.004	0.020	0.018	0.018	0.016	0.014	0.014	0.014	0.013	0.019	0.017	0.017	0.026	0.026	0.026	0.023	0.020	0.020	0.020	0.018	0.018	0.018
41	Vc	43	165	165	165	148	148	148	132	132	172	172	153	211	211	211	211	190	190	190	190	190	169
	fz	0.025	0.045	0.045	0.045	0.041	0.041	0.041	0.036	0.036	0.041	0.041	0.037	0.047	0.047	0.047	0.047	0.042	0.042	0.042	0.042	0.042	0.038
	RPM	13770	43714	43714	43714	39343	39343	39343	34971	34971	39084	39084	34742	44807	44807	44807	44807	40326	40326	40326	40326	40326	35846
	FEED	689	3934	3934	3934	3226	3226	3226	2518	2518	3205	3205	2571	4212	4212	4212	4212	3387	3387	3387	3387	3387	2724
	Ap	0.004	0.020	0.018	0.018	0.016	0.014	0.014	0.014	0.013	0.019	0.017	0.017	0.026	0.026	0.026	0.023	0.020	0.020	0.020	0.018	0.018	0.018

NEXT PAGE ▶

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

ISO	VDI 3323	Para-meter	Diameter (Ø)																				
			1.5	1.5	1.5	1.5	1.5	1.6	1.6	1.6	1.6	2	2	2	2	2	2	2	2	2	2	2	2
		L.B.S	18	20	22	25	30	8	12	16	20	3	4	6	8	10	12	13	14	16	18	20	22
P	5	Vc	194	194	194	145	145	258	232	232	206	319	319	319	319	319	287	287	287	287	287	287	255
		fz	0.043	0.043	0.043	0.038	0.038	0.055	0.050	0.050	0.044	0.057	0.057	0.057	0.057	0.057	0.051	0.051	0.051	0.051	0.051	0.051	0.046
		RPM	41092	41092	41092	30819	30819	51228	46105	46105	40982	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	45736	40654
		FEED	3534	3534	3534	2342	2342	5635	4611	4611	3606	5793	5793	5793	5793	5793	4665	4665	4665	4665	4665	4665	3740
		Ap	0.021	0.020	0.020	0.015	0.015	0.029	0.026	0.022	0.022	0.040	0.040	0.040	0.036	0.036	0.032	0.032	0.032	0.032	0.028	0.028	0.028
	8-9	Vc	194	194	194	145	145	258	232	232	206	319	319	319	319	319	287	287	287	287	287	287	255
		fz	0.043	0.043	0.043	0.038	0.038	0.055	0.050	0.050	0.044	0.057	0.057	0.057	0.057	0.057	0.051	0.051	0.051	0.051	0.051	0.051	0.046
		RPM	41092	41092	41092	30819	30819	51228	46105	46105	40982	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	45736	40654
		FEED	3534	3534	3534	2342	2342	5635	4611	4611	3606	5793	5793	5793	5793	5793	4665	4665	4665	4665	4665	4665	3740
		Ap	0.021	0.020	0.020	0.015	0.015	0.029	0.026	0.022	0.022	0.040	0.040	0.040	0.036	0.036	0.032	0.032	0.032	0.032	0.028	0.028	0.028
	11.1	Vc	194	194	194	145	145	258	232	232	206	319	319	319	319	319	287	287	287	287	287	287	255
		fz	0.043	0.043	0.043	0.038	0.038	0.055	0.050	0.050	0.044	0.057	0.057	0.057	0.057	0.057	0.051	0.051	0.051	0.051	0.051	0.051	0.046
		RPM	41092	41092	41092	30819	30819	51228	46105	46105	40982	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	45736	40654
		FEED	3534	3534	3534	2342	2342	5635	4611	4611	3606	5793	5793	5793	5793	5793	4665	4665	4665	4665	4665	4665	3740
		Ap	0.021	0.020	0.020	0.015	0.015	0.029	0.026	0.022	0.022	0.040	0.040	0.040	0.036	0.036	0.032	0.032	0.032	0.032	0.028	0.028	0.028
	11.2	Vc	185	185	185	139	139	247	222	222	198	309	309	309	309	309	278	278	278	278	278	278	247
		fz	0.038	0.038	0.038	0.033	0.033	0.048	0.043	0.043	0.038	0.050	0.050	0.050	0.050	0.050	0.045	0.045	0.045	0.045	0.045	0.045	0.040
		RPM	39342	39342	39342	29507	29507	49178	44260	44260	39342	49178	49178	49178	49178	49178	44260	44260	44260	44260	44260	44260	39342
		FEED	2990	2990	2990	1947	1947	4721	3806	3806	2990	4918	4918	4918	4918	4918	3983	3983	3983	3983	3983	3983	3147
		Ap	0.018	0.017	0.017	0.013	0.013	0.024	0.022	0.019	0.019	0.034	0.034	0.034	0.031	0.031	0.027	0.027	0.027	0.027	0.024	0.024	0.024
H	38.1	Vc	185	185	185	139	139	247	222	222	198	309	309	309	309	309	278	278	278	278	278	278	247
		fz	0.038	0.038	0.038	0.033	0.033	0.048	0.043	0.043	0.038	0.050	0.050	0.050	0.050	0.050	0.045	0.045	0.045	0.045	0.045	0.045	0.040
		RPM	39342	39342	39342	29507	29507	49178	44260	44260	39342	49178	49178	49178	49178	49178	44260	44260	44260	44260	44260	44260	39342
		FEED	2990	2990	2990	1947	1947	4721	3806	3806	2990	4918	4918	4918	4918	4918	3983	3983	3983	3983	3983	3983	3147
		Ap	0.018	0.017	0.017	0.013	0.013	0.024	0.022	0.019	0.019	0.034	0.034	0.034	0.031	0.031	0.027	0.027	0.027	0.027	0.024	0.024	0.024
	38.2	Vc	169	169	169	127	127	225	202	202	180	258	258	258	258	258	232	232	232	232	232	232	206
		fz	0.038	0.038	0.038	0.033	0.033	0.048	0.043	0.043	0.038	0.050	0.050	0.050	0.050	0.050	0.045	0.045	0.045	0.045	0.045	0.045	0.040
		RPM	35846	35846	35846	26884	26884	44671	40204	40204	35737	40983	40983	40983	40983	40983	36885	36885	36885	36885	36885	36885	32786
		FEED	2724	2724	2724	1774	1774	4288	3458	3458	2716	4098	4098	4098	4098	4098	3320	3320	3320	3320	3320	3320	2623
		Ap	0.018	0.017	0.017	0.013	0.013	0.024	0.022	0.019	0.019	0.034	0.034	0.034	0.031	0.031	0.027	0.027	0.027	0.027	0.024	0.024	0.024
	39.1	Vc	144	144	144	108	108	192	172	172	153	227	227	227	227	227	204	204	204	204	204	204	181
		fz	0.034	0.034	0.034	0.029	0.029	0.043	0.039	0.039	0.034	0.045	0.045	0.045	0.045	0.045	0.041	0.041	0.041	0.041	0.041	0.041	0.036
		RPM	30600	30600	30600	22950	22950	38114	34303	34303	30491	36064	36064	36064	36064	36064	32458	32458	32458	32458	32458	32458	28851
		FEED	2081	2081	2081	1331	1331	3278	2676	2676	2073	3246	3246	3246	3246	3246	2662	2662	2662	2662	2662	2662	2077
		Ap	0.017	0.016	0.016	0.012	0.012	0.023	0.020	0.018	0.018	0.032	0.032	0.032	0.029	0.029	0.026	0.026	0.026	0.026	0.022	0.022	0.022
	39.2	Vc	128	128	128	96	96	170	153	153	136	206	206	206	206	206	185	185	185	185	185	185	165
		fz	0.033	0.033	0.033	0.029	0.029	0.043	0.039	0.039	0.034	0.044	0.044	0.044	0.044	0.044	0.040	0.040	0.040	0.040	0.040	0.040	0.035
		RPM	27103	27103	27103	20327	20327	33811	30430	30430	27049	32786	32786	32786	32786	32786	29507	29507	29507	29507	29507	29507	26229
		FEED	1789	1789	1789	1179	1179	2908	2374	2374	1839	2885	2885	2885	2885	2885	2361	2361	2361	2361	2361	2361	1836
		Ap	0.017	0.016	0.016	0.012	0.012	0.023	0.020	0.018	0.018	0.032	0.032	0.032	0.029	0.029	0.026	0.026	0.026	0.026	0.022	0.022	0.022
	39.3	Vc	115	115	115	87	87	153	138	138	123	185	185	185	185	185	167	167	167	167	167	167	148
		fz	0.031	0.031	0.031	0.027	0.027	0.039	0.035	0.035	0.031	0.040	0.040	0.040	0.040	0.040	0.036	0.036	0.036	0.036	0.036	0.036	0.032
		RPM	24480	24480	24480	18360	18360	30532	27479	27479	24426	29507	29507	29507	29507	29507	26556	26556	26556	26556	26556	26556	23606
		FEED	1518	1518	1518	991	991	2381	1924	1924	1514	2361	2361	2361	2361	2361	1912	1912	1912	1912	1912	1912	1511
		Ap	0.014	0.013	0.013	0.010	0.010	0.019	0.017	0.015	0.015	0.026	0.026	0.026	0.023	0.023	0.021	0.021	0.021	0.021	0.018	0.018	0.018
	40	Vc	185	185	185	139	139	247	222	222	198	309	309	309	309	309	278	278	278	278	278	278	247
		fz	0.038	0.038	0.038	0.033	0.033	0.048	0.043	0.043	0.038	0.050	0.050	0.050	0.050	0.050	0.045	0.045	0.045	0.045	0.045	0.045	0.040
		RPM	39342	39342	39342	29507	29507	49178	44260	44260	39342	49178	49178	49178	49178	49178	44260	44260	44260	44260	44260	44260	39342
		FEED	2990	2990	2990	1947	1947	4721	3806	3806	2990	4918	4918	4918	4918	4918	3983	3983	3983	3983	3983	3983	3147
		Ap	0.018	0.017	0.017	0.013	0.013	0.024	0.022	0.019	0.019	0.034	0.034	0.034	0.031	0.031	0.027	0.027	0.027	0.027	0.024	0.024	0.024
	41	Vc	169	169	169	127	127	225	202	202	180	258	258	258	258	258	232	232	232	232	232	232	206
		fz	0.038	0.038	0.038	0.033	0.033	0.048	0.043	0.043	0.038	0.050	0.050	0.050	0.050	0.050	0.045	0.045	0.045	0.045	0.045	0.045	0.040
		RPM	35846	35846	35846	26884	26884	44671	40204	40204	35737	40983	40983	40983	40983	40983	36885	36885	36885	36885	36885	36885	32786
		FEED	2724	2724	2724	1774	1774	4288	3458	3458	2716	4098	4098	4098	4098	4098	3320	3320	3320	3320	3320	3320	2623
		Ap	0.018	0.017	0.017	0.013	0.013	0.024	0.022	0.019	0.019	0.034	0.034	0.034	0.031	0.031	0.027	0.027	0.027	0.027	0.024	0.024	0.024

NEXT PAGE ▶

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

VDI 3323	Para-meter	Diameter (Ø)																					
		2	2	2	2	2	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	3	3	3	3	3	3	3	3	3
	L.B.S	25	30	35	40	50	6	8	10	15	20	25	30	35	6	8	10	12	14	15	16	20	25
5	Vc	255	255	192	192	96	320	320	320	288	288	288	256	256	319	319	319	319	319	319	287	287	287
	fz	0.046	0.046	0.040	0.040	0.034	0.074	0.074	0.074	0.066	0.066	0.066	0.059	0.059	0.091	0.091	0.091	0.091	0.091	0.091	0.082	0.082	0.082
	RPM	40654	40654	30491	30491	15245	40685	40685	40685	36617	36617	36617	32548	32548	33879	33879	33879	33879	33879	33879	30491	30491	30491
	FEED	3740	3740	2439	2439	1037	6021	6021	6021	4833	4833	4833	3841	3841	6166	6166	6166	6166	6166	6166	5001	5001	5001
	Ap	0.028	0.026	0.020	0.020	0.010	0.050	0.045	0.045	0.040	0.040	0.035	0.035	0.033	0.060	0.060	0.054	0.054	0.054	0.054	0.048	0.048	0.042
8-9	Vc	255	255	192	192	96	320	320	320	288	288	288	256	256	319	319	319	319	319	319	287	287	287
	fz	0.046	0.046	0.040	0.040	0.034	0.074	0.074	0.074	0.066	0.066	0.066	0.059	0.059	0.091	0.091	0.091	0.091	0.091	0.091	0.082	0.082	0.082
	RPM	40654	40654	30491	30491	15245	40685	40685	40685	36617	36617	36617	32548	32548	33879	33879	33879	33879	33879	33879	30491	30491	30491
	FEED	3740	3740	2439	2439	1037	6021	6021	6021	4833	4833	4833	3841	3841	6166	6166	6166	6166	6166	6166	5001	5001	5001
	Ap	0.028	0.026	0.020	0.020	0.010	0.050	0.045	0.045	0.040	0.040	0.035	0.035	0.033	0.060	0.060	0.054	0.054	0.054	0.054	0.048	0.048	0.042
11.1	Vc	255	255	192	192	96	320	320	320	288	288	288	256	256	319	319	319	319	319	319	287	287	287
	fz	0.046	0.046	0.040	0.040	0.034	0.074	0.074	0.074	0.066	0.066	0.066	0.059	0.059	0.091	0.091	0.091	0.091	0.091	0.091	0.082	0.082	0.082
	RPM	40654	40654	30491	30491	15245	40685	40685	40685	36617	36617	36617	32548	32548	33879	33879	33879	33879	33879	33879	30491	30491	30491
	FEED	3740	3740	2439	2439	1037	6021	6021	6021	4833	4833	4833	3841	3841	6166	6166	6166	6166	6166	6166	5001	5001	5001
	Ap	0.028	0.026	0.020	0.020	0.010	0.050	0.045	0.045	0.040	0.040	0.035	0.035	0.033	0.060	0.060	0.054	0.054	0.054	0.054	0.048	0.048	0.042
11.2	Vc	247	247	185	185	93	309	309	309	278	278	278	247	247	309	309	309	309	309	309	278	278	278
	fz	0.040	0.040	0.035	0.035	0.030	0.066	0.066	0.066	0.059	0.059	0.059	0.053	0.053	0.083	0.083	0.083	0.083	0.083	0.083	0.075	0.075	0.075
	RPM	39342	39342	29507	29507	14753	39295	39295	39295	35366	35366	35366	31436	31436	32786	32786	32786	32786	32786	32786	29507	29507	29507
	FEED	3147	3147	2065	2065	885	5187	5187	5187	4173	4173	4173	3332	3332	5442	5442	5442	5442	5442	5442	4426	4426	4426
	Ap	0.024	0.022	0.017	0.017	0.009	0.043	0.038	0.038	0.034	0.034	0.030	0.030	0.028	0.051	0.051	0.046	0.046	0.046	0.046	0.041	0.041	0.036
38.1	Vc	247	247	185	185	93	309	309	309	278	278	278	247	247	309	309	309	309	309	309	278	278	278
	fz	0.040	0.040	0.035	0.035	0.030	0.066	0.066	0.066	0.059	0.059	0.059	0.053	0.053	0.083	0.083	0.083	0.083	0.083	0.083	0.075	0.075	0.075
	RPM	39342	39342	29507	29507	14753	39295	39295	39295	35366	35366	35366	31436	31436	32786	32786	32786	32786	32786	32786	29507	29507	29507
	FEED	3147	3147	2065	2065	885	5187	5187	5187	4173	4173	4173	3332	3332	5442	5442	5442	5442	5442	5442	4426	4426	4426
	Ap	0.024	0.022	0.017	0.017	0.009	0.043	0.038	0.038	0.034	0.034	0.030	0.030	0.028	0.051	0.051	0.046	0.046	0.046	0.046	0.041	0.041	0.036
38.2	Vc	206	206	155	155	77	257	257	257	232	232	232	206	206	258	258	258	258	258	258	232	232	232
	fz	0.040	0.040	0.035	0.035	0.030	0.063	0.063	0.063	0.056	0.056	0.056	0.050	0.050	0.075	0.075	0.075	0.075	0.075	0.075	0.068	0.068	0.068
	RPM	32786	32786	24590	24590	12295	32754	32754	32754	29479	29479	29479	26203	26203	27322	27322	27322	27322	27322	27322	24590	24590	24590
	FEED	2623	2623	1721	1721	738	4127	4127	4127	3302	3302	3302	2620	2620	4098	4098	4098	4098	4098	4098	3344	3344	3344
	Ap	0.024	0.022	0.017	0.017	0.009	0.043	0.038	0.038	0.034	0.034	0.030	0.030	0.028	0.051	0.051	0.046	0.046	0.046	0.046	0.041	0.041	0.036
39.1	Vc	181	181	136	136	68	227	227	227	204	204	204	181	181	227	227	227	227	227	227	204	204	204
	fz	0.036	0.036	0.032	0.032	0.027	0.056	0.056	0.056	0.050	0.050	0.050	0.045	0.045	0.067	0.067	0.067	0.067	0.067	0.067	0.060	0.060	0.060
	RPM	28851	28851	21638	21638	10819	28840	28840	28840	25956	25956	25956	23072	23072	24043	24043	24043	24043	24043	24043	21639	21639	21639
	FEED	2077	2077	1385	1385	584	3230	3230	3230	2596	2596	2596	2076	2076	3222	3222	3222	3222	3222	3222	2597	2597	2597
	Ap	0.022	0.021	0.016	0.016	0.008	0.040	0.036	0.036	0.032	0.032	0.028	0.028	0.026	0.048	0.048	0.043	0.043	0.043	0.043	0.038	0.038	0.034
39.2	Vc	165	165	124	124	62	206	206	206	186	186	186	165	165	206	206	206	206	206	206	185	185	185
	fz	0.035	0.035	0.031	0.031	0.026	0.055	0.055	0.055	0.050	0.050	0.050	0.044	0.044	0.067	0.067	0.067	0.067	0.067	0.067	0.060	0.060	0.060
	RPM	26229	26229	19672	19672	9836	26265	26265	26265	23639	23639	23639	21012	21012	21858	21858	21858	21858	21858	21858	19672	19672	19672
	FEED	1836	1836	1220	1220	511	2889	2889	2889	2364	2364	2364	1849	1849	2929	2929	2929	2929	2929	2929	2361	2361	2361
	Ap	0.022	0.021	0.016	0.016	0.008	0.040	0.036	0.036	0.032	0.032	0.028	0.028	0.026	0.048	0.048	0.043	0.043	0.043	0.043	0.038	0.038	0.034
39.3	Vc	148	148	111	111	56	185	185	185	167	167	167	148	148	185	185	185	185	185	185	167	167	167
	fz	0.032	0.032	0.028	0.028	0.024	0.051	0.051	0.051	0.045	0.045	0.045	0.040	0.040	0.061	0.061	0.061	0.061	0.061	0.061	0.055	0.055	0.055
	RPM	23606	23606	17704	17704	8852	23587	23587	23587	21228	21228	21228	18870	18870	19672	19672	19672	19672	19672	19672	17705	17705	17705
	FEED	1511	1511	991	991	425	2406	2406	2406	1911	1911	1911	1510	1510	2400	2400	2400	2400	2400	2400	1948	1948	1948
	Ap	0.018	0.017	0.013	0.013	0.007	0.033	0.029	0.029	0.026	0.026	0.023	0.023	0.021	0.039	0.039	0.035	0.035	0.035	0.035	0.031	0.031	0.027
40	Vc	247	247	185	185	93	309	309	309	278	278	278	247	247	309	309	309	309	309	309	278	278	278
	fz	0.040	0.040	0.035	0.035	0.030	0.066	0.066	0.066	0.059	0.059	0.059	0.053	0.053	0.083	0.083	0.083	0.083	0.083	0.083	0.075	0.075	0.075
	RPM	39342	39342	29507	29507	14753	39295	39295	39295	35366	35366	35366	31436	31436	32786	32786	32786	32786	32786	32786	29507	29507	29507
	FEED	3147	3147	2065	2065	885	5187	5187	5187	4173	4173	4173	3332	3332	5442	5442	5442	5442	5442	5442	4426	4426	4426
	Ap	0.024	0.022	0.017	0.017	0.009	0.043	0.038	0.038	0.034	0.034	0.030	0.030	0.028	0.051	0.051	0.046	0.046	0.046	0.046	0.041	0.041	0.036
41	Vc	206	206	155	155	77	257	257	257	232	232	232	206	206	258	258	258	258	258	258	232	232	232
	fz	0.040	0.040	0.035	0.035	0.030	0.063	0.063	0.063	0.056	0.056	0.056	0.050	0.050	0.075	0.075	0.075	0.075	0.075	0.075	0.068	0.068	0.068
	RPM	32786	32786	24590	24590	12295	32754	32754	32754	29479	29479	29479	26203	26203	27322	27322	27322	27322	27322	27322	24590	24590	24590
	FEED	2623	2623	1721	1721	738	4127	4127	4127	3302	3302	3302	2620	2620	4098	4098	4098	4098	4098	4098	3344	3344	3344
	Ap	0.024	0.022	0.017	0.017	0.009	0.043	0.038	0.038	0.034	0.034	0.030	0.030	0.028	0.051	0.051	0.046	0.046	0.046	0.046	0.041	0.041	0.036

NEXT PAGE ▶

HPI91, HPI92 SERIES — 2 FLUTE BALL NOSE for RIB PROCESSING




Vc = m/min. RPM = rev./min. fz = mm/tooth FEED = mm/min. Ap = mm LBS = Length Below Shank

ISO	VDI 3323	Para-meter	Diameter (Ø)																					
			3	3	3	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4	4	4	4	4	4	4
			L.B.S	30	35	40	50	15	20	25	30	35	40	45	8	10	12	14	15	20	25	30	35	40
P	5	Vc	287	255	255	192	324	292	292	292	292	260	260	324	324	324	324	324	324	292	292	292	292	
		fz	0.082	0.073	0.073	0.064	0.105	0.094	0.094	0.094	0.094	0.084	0.084	0.120	0.120	0.120	0.120	0.120	0.120	0.108	0.108	0.108	0.108	
		RPM	30491	27103	27103	20327	29510	26559	26559	26559	26559	23608	23608	25819	25819	25819	25819	25819	25819	23237	23237	23237	23237	
		FEED	5001	3957	3957	2602	6197	4993	4993	4993	4993	3966	3966	6197	6197	6197	6197	6197	6197	5019	5019	5019	5019	
		Ap	0.042	0.042	0.039	0.030	0.063	0.056	0.056	0.049	0.049	0.049	0.049	0.080	0.080	0.080	0.072	0.072	0.072	0.064	0.064	0.056	0.056	
	8-9	Vc	287	255	255	192	324	292	292	292	292	260	260	324	324	324	324	324	324	292	292	292	292	
		fz	0.082	0.073	0.073	0.064	0.105	0.094	0.094	0.094	0.094	0.084	0.084	0.120	0.120	0.120	0.120	0.120	0.120	0.108	0.108	0.108	0.108	
		RPM	30491	27103	27103	20327	29510	26559	26559	26559	26559	23608	23608	25819	25819	25819	25819	25819	25819	23237	23237	23237	23237	
		FEED	5001	3957	3957	2602	6197	4993	4993	4993	4993	3966	3966	6197	6197	6197	6197	6197	6197	5019	5019	5019	5019	
		Ap	0.042	0.042	0.039	0.030	0.063	0.056	0.056	0.049	0.049	0.049	0.049	0.080	0.080	0.080	0.072	0.072	0.072	0.064	0.064	0.056	0.056	
	11.1	Vc	287	255	255	192	324	292	292	292	292	260	260	324	324	324	324	324	324	292	292	292	292	
		fz	0.082	0.073	0.073	0.064	0.105	0.094	0.094	0.094	0.094	0.084	0.084	0.120	0.120	0.120	0.120	0.120	0.120	0.108	0.108	0.108	0.108	
		RPM	30491	27103	27103	20327	29510	26559	26559	26559	26559	23608	23608	25819	25819	25819	25819	25819	25819	23237	23237	23237	23237	
		FEED	5001	3957	3957	2602	6197	4993	4993	4993	4993	3966	3966	6197	6197	6197	6197	6197	6197	5019	5019	5019	5019	
		Ap	0.042	0.042	0.039	0.030	0.063	0.056	0.056	0.049	0.049	0.049	0.049	0.080	0.080	0.080	0.072	0.072	0.072	0.064	0.064	0.056	0.056	
	11.2	Vc	278	247	247	185	309	278	278	278	278	247	247	309	309	309	309	309	309	278	278	278	278	
		fz	0.075	0.066	0.066	0.058	0.097	0.087	0.087	0.087	0.087	0.078	0.078	0.111	0.111	0.111	0.111	0.111	0.111	0.100	0.100	0.100	0.100	
		RPM	29507	26229	26229	19672	28068	25261	25261	25261	25261	22454	22454	24589	24589	24589	24589	24589	24589	22130	22130	22130	22130	
		FEED	4426	3462	3462	2282	5445	4395	4395	4395	4395	3503	3503	5459	5459	5459	5459	5459	5459	4426	4426	4426	4426	
		Ap	0.036	0.036	0.033	0.026	0.054	0.048	0.048	0.042	0.042	0.042	0.042	0.068	0.068	0.068	0.061	0.061	0.061	0.054	0.054	0.048	0.048	
H	38.1	Vc	278	247	247	185	309	278	278	278	278	247	247	309	309	309	309	309	309	278	278	278	278	
		fz	0.075	0.066	0.066	0.058	0.097	0.087	0.087	0.087	0.087	0.078	0.078	0.111	0.111	0.111	0.111	0.111	0.111	0.100	0.100	0.100	0.100	
		RPM	29507	26229	26229	19672	28068	25261	25261	25261	25261	22454	22454	24589	24589	24589	24589	24589	24589	22130	22130	22130	22130	
		FEED	4426	3462	3462	2282	5445	4395	4395	4395	4395	3503	3503	5459	5459	5459	5459	5459	5459	4426	4426	4426	4426	
		Ap	0.036	0.036	0.033	0.026	0.054	0.048	0.048	0.042	0.042	0.042	0.042	0.068	0.068	0.068	0.061	0.061	0.061	0.054	0.054	0.048	0.048	
	38.2	Vc	232	206	206	155	258	232	232	232	232	206	206	257	257	257	257	257	257	232	232	232	232	
		fz	0.068	0.060	0.060	0.053	0.087	0.079	0.079	0.079	0.079	0.070	0.070	0.100	0.100	0.100	0.100	0.100	0.100	0.090	0.090	0.090	0.090	
		RPM	24590	21858	21858	16393	23433	21090	21090	21090	21090	18746	18746	20491	20491	20491	20491	20491	20491	18442	18442	18442	18442	
		FEED	3344	2623	2623	1738	4077	3332	3332	3332	3332	2624	2624	4098	4098	4098	4098	4098	4098	3320	3320	3320	3320	
		Ap	0.036	0.036	0.033	0.026	0.054	0.048	0.048	0.042	0.042	0.042	0.042	0.068	0.068	0.068	0.061	0.061	0.061	0.054	0.054	0.048	0.048	
	39.1	Vc	204	181	181	136	227	204	204	204	204	181	181	227	227	227	227	227	227	204	204	204	204	
		fz	0.060	0.054	0.054	0.047	0.079	0.071	0.071	0.071	0.071	0.063	0.063	0.090	0.090	0.090	0.090	0.090	0.090	0.081	0.081	0.081	0.081	
		RPM	21639	19234	19234	14426	20600	18540	18540	18540	18540	16480	16480	18032	18032	18032	18032	18032	18032	16229	16229	16229	16229	
		FEED	2597	2077	2077	1356	3255	2633	2633	2633	2633	2076	2076	3246	3246	3246	3246	3246	3246	2629	2629	2629	2629	
		Ap	0.034	0.034	0.031	0.024	0.050	0.045	0.045	0.039	0.039	0.039	0.039	0.064	0.064	0.064	0.058	0.058	0.058	0.051	0.051	0.045	0.045	
	39.2	Vc	185	165	165	124	206	186	186	186	186	165	165	206	206	206	206	206	206	185	185	185	185	
		fz	0.060	0.054	0.054	0.047	0.078	0.070	0.070	0.070	0.070	0.062	0.062	0.088	0.088	0.088	0.088	0.088	0.088	0.079	0.079	0.079	0.079	
		RPM	19672	17486	17486	13115	18746	16871	16871	16871	16871	14997	14997	16392	16392	16392	16392	16392	16392	14753	14753	14753	14753	
		FEED	2361	1888	1888	1233	2924	2362	2362	2362	2362	1860	1860	2885	2885	2885	2885	2885	2885	2331	2331	2331	2331	
		Ap	0.034	0.034	0.031	0.024	0.050	0.045	0.045	0.039	0.039	0.039	0.039	0.064	0.064	0.064	0.058	0.058	0.058	0.051	0.051	0.045	0.045	
	39.3	Vc	167	148	148	111	186	167	167	167	167	149	149	185	185	185	185	185	185	167	167	167	167	
		fz	0.055	0.049	0.049	0.043	0.070	0.063	0.063	0.063	0.063	0.056	0.056	0.079	0.079	0.079	0.079	0.079	0.079	0.071	0.071	0.071	0.071	
		RPM	17705	15738	15738	11803	16892	15203	15203	15203	15203	13514	13514	14754	14754	14754	14754	14754	14754	13279	13279	13279	13279	
		FEED	1948	1542	1542	1015	2365	1916	1916	1916	1916	1514	1514	2331	2331	2331	2331	2331	2331	1886	1886	1886	1886	
		Ap	0.027	0.027	0.025	0.020	0.041	0.036	0.036	0.032	0.032	0.032	0.032	0.052	0.052	0.052	0.047	0.047	0.047	0.042	0.042	0.036	0.036	
	40	Vc	278	247	247	185	309	278	278	278	278	247	247	309	309	309	309	309	309	278	278	278	278	
		fz	0.075	0.066	0.066	0.058	0.097	0.087	0.087	0.087	0.087	0.078	0.078	0.111	0.111	0.111	0.111	0.111	0.111	0.100	0.100	0.100	0.100	
		RPM	29507	26229	26229	19672	28068	25261	25261	25261	25261	22454	22454	24589	24589	24589	24589	24589	24589	22130	22130	22130	22130	
		FEED	4426	3462	3462	2282	5445	4395	4395	4395	4395	3503	3503	5459	5459	5459	5459	5459	5459	4426	4426	4426	4426	
		Ap	0.036	0.036	0.033	0.026	0.054	0.048	0.048	0.042	0.042	0.042	0.042	0.068	0.068	0.068	0.061	0.061	0.061	0.054	0.054	0.048	0.048	
	41	Vc	232	206	206	155	258	232	232	232	232	206	206	257	257	257	257	257	257	232	232	232	232	
		fz	0.068	0.060	0.060	0.053	0.087	0.079	0.079	0.079	0.079	0.070	0.070	0.100	0.100	0.100	0.100	0.100	0.100	0.090	0.090	0.090	0.090	
		RPM	24590	21858	21858	16393	23433	21090	21090	21090	21090	18746	18746	20491	20491	20491	20491	20491	20491	18442	18442	18442	18442	
		FEED	3344	2623	2623	1738	4077	3332	3332	3332	3332	2624	2624	4098	4098	4098	4098	4098	4098	3320	3320	3320	3320	
		Ap	0.036	0.036	0.033	0.026	0.054	0.048	0.048	0.042	0.042	0.042	0.042	0.068	0.068	0.068	0.061	0.061	0.061	0.054	0.054	0.048	0.048	

NEXT PAGE ▶

HPI91, HPI92 SERIES — 2 FLUTE BALL NOSE for RIB PROCESSING




Vc = m/min. RPM = rev./min. fz = mm/tooth FEED = mm/min. Ap = mm LBS = Length Below Shank

VDI 3323	Para-meter	Diameter (Ø)																						
		4	4	4	5	5	5	5	5	5	5	6	6	6	6	6	6	6	6	6	7	7	7	
	L.B.S	45	50	61.1	10	12	15	20	25	30	40	10	15	20	25	30	35	40	50	60	40	45	60	
5	Vc	260	260	195	299	299	299	299	299	269	269	268	268	268	268	268	241	241	241	241	255	255	255	
	fz	0.096	0.096	0.084	0.156	0.156	0.156	0.156	0.156	0.140	0.140	0.174	0.174	0.174	0.174	0.174	0.157	0.157	0.157	0.157	0.162	0.162	0.162	
	RPM	20655	20655	15491	19016	19016	19016	19016	19016	17114	17114	14207	14207	14207	14207	14207	12786	12786	12786	12786	11588	11588	11588	
	FEED	3966	3966	2602	5933	5933	5933	5933	5933	4792	4792	4944	4944	4944	4944	4944	4015	4015	4015	4015	3755	3755	3755	
	Ap	0.056	0.056	0.052	0.100	0.100	0.100	0.090	0.090	0.080	0.080	0.120	0.120	0.108	0.108	0.108	0.096	0.096	0.084	0.084	0.112	0.112	0.098	
8-9	Vc	260	260	195	299	299	299	299	299	269	269	268	268	268	268	268	241	241	241	241	255	255	255	
	fz	0.096	0.096	0.084	0.156	0.156	0.156	0.156	0.156	0.140	0.140	0.174	0.174	0.174	0.174	0.174	0.157	0.157	0.157	0.157	0.162	0.162	0.162	
	RPM	20655	20655	15491	19016	19016	19016	19016	19016	17114	17114	14207	14207	14207	14207	14207	12786	12786	12786	12786	11588	11588	11588	
	FEED	3966	3966	2602	5933	5933	5933	5933	5933	4792	4792	4944	4944	4944	4944	4944	4015	4015	4015	4015	3755	3755	3755	
	Ap	0.056	0.056	0.052	0.100	0.100	0.100	0.090	0.090	0.080	0.080	0.120	0.120	0.108	0.108	0.108	0.096	0.096	0.084	0.084	0.112	0.112	0.098	
11.1	Vc	260	260	195	299	299	299	299	299	269	269	268	268	268	268	268	241	241	241	241	255	255	255	
	fz	0.096	0.096	0.084	0.156	0.156	0.156	0.156	0.156	0.140	0.140	0.174	0.174	0.174	0.174	0.174	0.157	0.157	0.157	0.157	0.162	0.162	0.162	
	RPM	20655	20655	15491	19016	19016	19016	19016	19016	17114	17114	14207	14207	14207	14207	14207	12786	12786	12786	12786	11588	11588	11588	
	FEED	3966	3966	2602	5933	5933	5933	5933	5933	4792	4792	4944	4944	4944	4944	4944	4015	4015	4015	4015	3755	3755	3755	
	Ap	0.056	0.056	0.052	0.100	0.100	0.100	0.090	0.090	0.080	0.080	0.120	0.120	0.108	0.108	0.108	0.096	0.096	0.084	0.084	0.112	0.112	0.098	
11.2	Vc	247	247	185	288	288	288	288	288	260	260	263	263	263	263	263	236	236	236	236	246	246	246	
	fz	0.089	0.089	0.078	0.138	0.138	0.138	0.138	0.138	0.124	0.124	0.153	0.153	0.153	0.153	0.153	0.138	0.138	0.138	0.138	0.143	0.143	0.143	
	RPM	19671	19671	14753	18360	18360	18360	18360	18360	16524	16524	13934	13934	13934	13934	13934	12541	12541	12541	12541	11171	11171	11171	
	FEED	3501	3501	2301	5067	5067	5067	5067	5067	4098	4098	4264	4264	4264	4264	4264	3461	3461	3461	3461	3195	3195	3195	
	Ap	0.048	0.048	0.044	0.085	0.085	0.085	0.077	0.077	0.068	0.068	0.102	0.102	0.092	0.092	0.092	0.082	0.082	0.071	0.071	0.095	0.095	0.083	
38.1	Vc	247	247	185	288	288	288	288	288	260	260	263	263	263	263	263	236	236	236	236	246	246	246	
	fz	0.089	0.089	0.078	0.138	0.138	0.138	0.138	0.138	0.124	0.124	0.153	0.153	0.153	0.153	0.153	0.138	0.138	0.138	0.138	0.143	0.143	0.143	
	RPM	19671	19671	14753	18360	18360	18360	18360	18360	16524	16524	13934	13934	13934	13934	13934	12541	12541	12541	12541	11171	11171	11171	
	FEED	3501	3501	2301	5067	5067	5067	5067	5067	4098	4098	4264	4264	4264	4264	4264	3461	3461	3461	3461	3195	3195	3195	
	Ap	0.048	0.048	0.044	0.085	0.085	0.085	0.077	0.077	0.068	0.068	0.102	0.102	0.092	0.092	0.092	0.082	0.082	0.071	0.071	0.095	0.095	0.083	
38.2	Vc	206	206	155	242	242	242	242	242	218	218	211	211	211	211	211	190	190	190	190	199	199	199	
	fz	0.080	0.080	0.070	0.125	0.125	0.125	0.125	0.125	0.113	0.113	0.141	0.141	0.141	0.141	0.141	0.127	0.127	0.127	0.127	0.133	0.133	0.133	
	RPM	16393	16393	12295	15410	15410	15410	15410	15410	13869	13869	11202	11202	11202	11202	11202	10082	10082	10082	10082	9048	9048	9048	
	FEED	2623	2623	1721	3853	3853	3853	3853	3853	3134	3134	3159	3159	3159	3159	3159	2561	2561	2561	2561	2407	2407	2407	
	Ap	0.048	0.048	0.044	0.085	0.085	0.085	0.077	0.077	0.068	0.068	0.102	0.102	0.092	0.092	0.092	0.082	0.082	0.071	0.071	0.095	0.095	0.083	
39.1	Vc	181	181	136	216	216	216	216	216	195	195	196	196	196	196	196	176	176	176	176	180	180	180	
	fz	0.072	0.072	0.063	0.113	0.113	0.113	0.113	0.113	0.102	0.102	0.125	0.125	0.125	0.125	0.125	0.113	0.113	0.113	0.113	0.118	0.118	0.118	
	RPM	14426	14426	10819	13770	13770	13770	13770	13770	12393	12393	10382	10382	10382	10382	10382	9344	9344	9344	9344	8204	8204	8204	
	FEED	2077	2077	1363	3112	3112	3112	3112	3112	2528	2528	2596	2596	2596	2596	2596	2112	2112	2112	2112	1936	1936	1936	
	Ap	0.045	0.045	0.042	0.080	0.080	0.080	0.072	0.072	0.064	0.064	0.096	0.096	0.086	0.086	0.086	0.077	0.077	0.067	0.067	0.090	0.090	0.078	
39.2	Vc	165	165	124	185	185	185	185	185	167	167	170	170	170	170	170	153	153	153	153	158	158	158	
	fz	0.070	0.070	0.062	0.111	0.111	0.111	0.111	0.111	0.100	0.100	0.122	0.122	0.122	0.122	0.122	0.110	0.110	0.110	0.110	0.115	0.115	0.115	
	RPM	13114	13114	9835	11803	11803	11803	11803	11803	10623	10623	9017	9017	9017	9017	9017	8115	8115	8115	8115	7185	7185	7185	
	FEED	1836	1836	1220	2620	2620	2620	2620	2620	2125	2125	2200	2200	2200	2200	2200	1785	1785	1785	1785	1653	1653	1653	
	Ap	0.045	0.045	0.042	0.080	0.080	0.080	0.072	0.072	0.064	0.064	0.096	0.096	0.086	0.086	0.086	0.077	0.077	0.067	0.067	0.090	0.090	0.078	
39.3	Vc	148	148	111	170	170	170	170	170	153	153	155	155	155	155	155	139	139	139	139	148	148	148	
	fz	0.063	0.063	0.055	0.100	0.100	0.100	0.100	0.100	0.090	0.090	0.109	0.109	0.109	0.109	0.109	0.098	0.098	0.098	0.098	0.102	0.102	0.102	
	RPM	11803	11803	8852	10819	10819	10819	10819	10819	9737	9737	8197	8197	8197	8197	8197	7377	7377	7377	7377	6731	6731	6731	
	FEED	1487	1487	974	2164	2164	2164	2164	2164	1753	1753	1787	1787	1787	1787	1787	1446	1446	1446	1446	1373	1373	1373	
	Ap	0.036	0.036	0.034	0.065	0.065	0.065	0.059	0.059	0.052	0.052	0.078	0.078	0.070	0.070	0.070	0.062	0.062	0.055	0.055	0.073	0.073	0.064	
40	Vc	247	247	185	288	288	288	288	288	260	260	263	263	263	263	263	236	236	236	236	246	246	246	
	fz	0.089	0.089	0.078	0.138	0.138	0.138	0.138	0.138	0.124	0.124	0.153	0.153	0.153	0.153	0.153	0.138	0.138	0.138	0.138	0.143	0.143	0.143	
	RPM	19671	19671	14753	18360	18360	18360	18360	18360	16524	16524	13934	13934	13934	13934	13934	12541	12541	12541	12541	11171	11171	11171	
	FEED	3501	3501	2301	5067	5067	5067	5067	5067	4098	4098	4264	4264	4264	4264	4264	3461	3461	3461	3461	3195	3195	3195	
	Ap	0.048	0.048	0.044	0.085	0.085	0.085	0.077	0.077	0.068	0.068	0.102	0.102	0.092	0.092	0.092	0.082	0.082	0.071	0.071	0.095	0.095	0.083	
41	Vc	206	206	155	242	242	242	242	242	218	218	211	211	211	211	211	190	190	190	190	199	199	199	
	fz	0.080	0.080	0.070	0.125	0.125	0.125	0.125	0.125	0.113	0.113	0.141	0.141	0.141	0.141	0.141	0.127	0.127	0.127	0.127	0.133	0.133	0.133	
	RPM	16393	16393	12295	15410	15410	15410	15410	15410	13869	13869	11202	11202	11202	11202	11202	10082	10082	10082	10082	9048	9048	9048	
	FEED	2623	2623	1721	3853	3853	3853	3853	3853	3134	3134	3159	3159	3159	3159	3159	2561	2561	2561	2561	2407	2407	2407	
	Ap	0.048	0.048	0.044	0.085	0.085	0.085	0.077	0.077	0.068	0.068	0.102	0.102	0.092	0.092	0.092	0.082	0.082	0.071	0.071	0.095	0.095	0.083	

NEXT PAGE ▶


HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING



Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

ISO	VDI 3323	Para-meter	Diameter (Ø)																		
			8	8	8	8	8	8	8	8	10	10	10	10	10	10	10	12	12	12	12
		L.B.S	35	50	55	60	70	80	98	120	35	55	60	65	75	86	120	60	80	106	120
P	5	Vc	288	260	260	260	260	260	231	231	299	269	269	269	269	269	239	268	241	241	241
		fz	0.189	0.170	0.170	0.170	0.170	0.170	0.151	0.151	0.199	0.179	0.179	0.179	0.179	0.179	0.159	0.212	0.191	0.191	0.191
		RPM	11475	10328	10328	10328	10328	10328	9180	9180	9508	8557	8557	8557	8557	8557	7606	7104	6394	6394	6394
		FEED	4338	3512	3512	3512	3512	3512	2772	2772	3784	3063	3063	3063	3063	3063	2419	3012	2443	2443	2443
		Ap	0.144	0.128	0.128	0.128	0.112	0.112	0.112	0.104	0.180	0.160	0.160	0.160	0.160	0.140	0.140	0.216	0.192	0.168	0.168
	8-9	Vc	288	260	260	260	260	260	231	231	299	269	269	269	269	269	239	268	241	241	241
		fz	0.189	0.170	0.170	0.170	0.170	0.170	0.151	0.151	0.199	0.179	0.179	0.179	0.179	0.179	0.159	0.212	0.191	0.191	0.191
		RPM	11475	10328	10328	10328	10328	10328	9180	9180	9508	8557	8557	8557	8557	8557	7606	7104	6394	6394	6394
		FEED	4338	3512	3512	3512	3512	3512	2772	2772	3784	3063	3063	3063	3063	3063	2419	3012	2443	2443	2443
		Ap	0.144	0.128	0.128	0.128	0.112	0.112	0.112	0.104	0.180	0.160	0.160	0.160	0.160	0.140	0.140	0.216	0.192	0.168	0.168
	11.1	Vc	288	260	260	260	260	260	231	231	299	269	269	269	269	269	239	268	241	241	241
		fz	0.189	0.170	0.170	0.170	0.170	0.170	0.151	0.151	0.199	0.179	0.179	0.179	0.179	0.179	0.159	0.212	0.191	0.191	0.191
		RPM	11475	10328	10328	10328	10328	10328	9180	9180	9508	8557	8557	8557	8557	8557	7606	7104	6394	6394	6394
		FEED	4338	3512	3512	3512	3512	3512	2772	2772	3784	3063	3063	3063	3063	3063	2419	3012	2443	2443	2443
		Ap	0.144	0.128	0.128	0.128	0.112	0.112	0.112	0.104	0.180	0.160	0.160	0.160	0.160	0.140	0.140	0.216	0.192	0.168	0.168
	11.2	Vc	278	250	250	250	250	250	222	222	288	260	260	260	260	260	231	257	232	232	232
		fz	0.164	0.148	0.148	0.148	0.148	0.148	0.131	0.131	0.174	0.157	0.157	0.157	0.157	0.157	0.139	0.187	0.168	0.168	0.168
		RPM	11065	9959	9959	9959	9959	9959	8852	8852	9180	8262	8262	8262	8262	8262	7344	6830	6147	6147	6147
		FEED	3629	2948	2948	2948	2948	2948	2319	2319	3195	2594	2594	2594	2594	2594	2042	2554	2065	2065	2065
		Ap	0.122	0.109	0.109	0.109	0.095	0.095	0.095	0.088	0.153	0.136	0.136	0.136	0.136	0.119	0.119	0.184	0.163	0.143	0.143
H	38.1	Vc	278	250	250	250	250	250	222	222	288	260	260	260	260	260	231	257	232	232	232
		fz	0.164	0.148	0.148	0.148	0.148	0.148	0.131	0.131	0.174	0.157	0.157	0.157	0.157	0.157	0.139	0.187	0.168	0.168	0.168
		RPM	11065	9959	9959	9959	9959	9959	8852	8852	9180	8262	8262	8262	8262	8262	7344	6830	6147	6147	6147
		FEED	3629	2948	2948	2948	2948	2948	2319	2319	3195	2594	2594	2594	2594	2594	2042	2554	2065	2065	2065
		Ap	0.122	0.109	0.109	0.109	0.095	0.095	0.095	0.088	0.153	0.136	0.136	0.136	0.136	0.119	0.119	0.184	0.163	0.143	0.143
	38.2	Vc	232	209	209	209	209	209	185	185	242	218	218	218	218	218	194	216	195	195	195
		fz	0.150	0.135	0.135	0.135	0.135	0.135	0.120	0.120	0.160	0.144	0.144	0.144	0.144	0.144	0.128	0.170	0.153	0.153	0.153
		RPM	9221	8299	8299	8299	8299	8299	7377	7377	7704	6934	6934	6934	6934	6934	6163	5737	5163	5163	5163
		FEED	2766	2241	2241	2241	2241	2241	1770	1770	2465	1997	1997	1997	1997	1997	1578	1951	1580	1580	1580
		Ap	0.122	0.109	0.109	0.109	0.095	0.095	0.095	0.088	0.153	0.136	0.136	0.136	0.136	0.119	0.119	0.184	0.163	0.143	0.143
	39.1	Vc	206	185	185	185	185	185	165	165	211	190	190	190	190	190	169	196	176	176	176
		fz	0.134	0.121	0.121	0.121	0.121	0.121	0.107	0.107	0.144	0.130	0.130	0.130	0.130	0.130	0.115	0.155	0.140	0.140	0.140
		RPM	8197	7377	7377	7377	7377	7377	6558	6558	6721	6049	6049	6049	6049	6049	5377	5191	4672	4672	4672
		FEED	2197	1785	1785	1785	1785	1785	1403	1403	1936	1573	1573	1573	1573	1573	1237	1609	1308	1308	1308
		Ap	0.115	0.102	0.102	0.102	0.090	0.090	0.090	0.083	0.144	0.128	0.128	0.128	0.128	0.112	0.112	0.173	0.154	0.134	0.134
	39.2	Vc	180	162	162	162	162	162	144	144	185	167	167	167	167	167	148	170	153	153	153
		fz	0.132	0.119	0.119	0.119	0.119	0.119	0.106	0.106	0.142	0.128	0.128	0.128	0.128	0.128	0.114	0.142	0.128	0.128	0.128
		RPM	7172	6455	6455	6455	6455	6455	5738	5738	5902	5312	5312	5312	5312	5312	4722	4508	4057	4057	4057
		FEED	1893	1536	1536	1536	1536	1536	1216	1216	1676	1360	1360	1360	1360	1360	1077	1280	1039	1039	1039
		Ap	0.115	0.102	0.102	0.102	0.090	0.090	0.090	0.083	0.144	0.128	0.128	0.128	0.128	0.112	0.112	0.173	0.154	0.134	0.134
	39.3	Vc	170	153	153	153	153	153	136	136	170	153	153	153	153	153	136	154	139	139	139
		fz	0.119	0.107	0.107	0.107	0.107	0.107	0.095	0.095	0.130	0.117	0.117	0.117	0.117	0.117	0.104	0.131	0.118	0.118	0.118
		RPM	6762	6086	6086	6086	6086	6086	5410	5410	5410	4869	4869	4869	4869	4869	4328	4098	3688	3688	3688
		FEED	1609	1302	1302	1302	1302	1302	1028	1028	1407	1139	1139	1139	1139	1139	900	1074	870	870	870
		Ap	0.094	0.083	0.083	0.083	0.073	0.073	0.073	0.068	0.117	0.104	0.104	0.104	0.104	0.091	0.091	0.140	0.125	0.109	0.109
	40	Vc	278	250	250	250	250	250	222	222	288	260	260	260	260	260	231	257	232	232	232
		fz	0.164	0.148	0.148	0.148	0.148	0.148	0.131	0.131	0.174	0.157	0.157	0.157	0.157	0.157	0.139	0.187	0.168	0.168	0.168
		RPM	11065	9959	9959	9959	9959	9959	8852	8852	9180	8262	8262	8262	8262	8262	7344	6830	6147	6147	6147
		FEED	3629	2948	2948	2948	2948	2948	2319	2319	3195	2594	2594	2594	2594	2594	2042	2554	2065	2065	2065
		Ap	0.122	0.109	0.109	0.109	0.095	0.095	0.095	0.088	0.153	0.136	0.136	0.136	0.136	0.119	0.119	0.184	0.163	0.143	0.143
	41	Vc	232	209	209	209	209	209	185	185	242	218	218	218	218	218	194	216	195	195	195
		fz	0.150	0.135	0.135	0.135	0.135	0.135	0.120	0.120	0.160	0.144	0.144	0.144	0.144	0.144	0.128	0.170	0.153	0.153	0.153
		RPM	9221	8299	8299	8299	8299	8299	7377	7377	7704	6934	6934	6934	6934	6934	6163	5737	5163	5163	5163
		FEED	2766	2241	2241	2241	2241	2241	1770	1770	2465	1997	1997	1997	1997	1997	1578	1951	1580	1580	1580
		Ap	0.122	0.109	0.109	0.109	0.095	0.095	0.095	0.088	0.153	0.136	0.136	0.136	0.136	0.119	0.119	0.184	0.163	0.143	0.143

HPI89 SERIES 2 FLUTE CORNER RADIUS for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

ISO	VDI 3323	Material Description	Slotting	Para-meter	Diameter (Ø)																
					0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.4	0.4	0.4	0.4	0.4	0.4	0.5	0.5	0.5
				Ae	0.5	1	1.5	2	1	1.5	2	2.5	3	1	1.5	2	2.5	3	4	1	2	3
P	5	Non-alloy steel	1.0D	Vc	31	31	28	28	46	46	42	42	42	67	67	67	60	60	60	82	82	74
				fz	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.004	0.004	0.004
				RPM	49178	49178	44260	44260	49178	49178	44260	44260	44260	53277	53277	53277	47949	47949	47949	52458	52458	47212
				FEED	98	98	89	89	197	197	177	177	177	213	213	213	192	192	192	420	420	378
				Ap	0.010	0.009	0.008	0.007	0.014	0.014	0.012	0.011	0.011	0.020	0.018	0.018	0.016	0.016	0.014	0.025	0.023	0.020
	8~9	Low alloy steel	1.0D	Vc	31	31	28	28	46	46	42	42	42	67	67	67	60	60	60	82	82	74
				fz	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.004	0.004	0.004
				RPM	49178	49178	44260	44260	49178	49178	44260	44260	44260	53277	53277	53277	47949	47949	47949	52458	52458	47212
				FEED	98	98	89	89	197	197	177	177	177	213	213	213	192	192	192	420	420	378
				Ap	0.010	0.009	0.008	0.007	0.014	0.014	0.012	0.011	0.011	0.020	0.018	0.018	0.016	0.016	0.014	0.025	0.023	0.020
	11.1	High alloyed steel, and tool steel	1.0D	Vc	31	31	28	28	46	46	42	42	42	67	67	67	60	60	60	82	82	74
				fz	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.004	0.004	0.004
				RPM	49178	49178	44260	44260	49178	49178	44260	44260	44260	53277	53277	53277	47949	47949	47949	52458	52458	47212
				FEED	98	98	89	89	197	197	177	177	177	213	213	213	192	192	192	420	420	378
				Ap	0.010	0.009	0.008	0.007	0.014	0.014	0.012	0.011	0.011	0.020	0.018	0.018	0.016	0.016	0.014	0.025	0.023	0.020
	11.2		1.0D	Vc	31	31	28	28	41	41	37	37	37	57	57	57	51	51	51	72	72	65
				fz	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003
				RPM	49178	49178	44260	44260	43714	43714	39343	39343	39343	45081	45081	45081	40573	40573	40573	45900	45900	41310
				FEED	98	98	89	89	175	175	157	157	157	180	180	180	162	162	162	275	275	248
				Ap	0.009	0.008	0.007	0.006	0.011	0.011	0.010	0.009	0.009	0.017	0.015	0.015	0.014	0.014	0.012	0.021	0.019	0.017
H	38.1	Hardened steel	1.0D	Vc	31	31	28	28	41	41	37	37	37	57	57	57	51	51	51	72	72	65
				fz	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003
				RPM	49178	49178	44260	44260	43714	43714	39343	39343	39343	45081	45081	45081	40573	40573	40573	45900	45900	41310
				FEED	98	98	89	89	175	175	157	157	157	180	180	180	162	162	162	275	275	248
				Ap	0.009	0.008	0.007	0.006	0.011	0.011	0.010	0.009	0.009	0.017	0.015	0.015	0.014	0.014	0.012	0.021	0.019	0.017
	38.2		1.0D	Vc	26	26	23	23	41	41	37	37	37	52	52	52	46	46	46	67	67	60
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003
				RPM	40983	40983	36885	36885	43714	43714	39343	39343	39343	40983	40983	40983	36885	36885	36885	42621	42621	38359
				FEED	82	82	74	74	87	87	79	79	79	164	164	164	148	148	148	256	256	230
				Ap	0.009	0.008	0.007	0.006	0.011	0.011	0.010	0.009	0.009	0.017	0.015	0.015	0.014	0.014	0.012	0.021	0.019	0.017
	39.1		1.0D	Vc	21	21	19	19	31	31	28	28	28	41	41	41	37	37	37	52	52	46
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002
				RPM	32786	32786	29507	29507	32786	32786	29507	29507	29507	32786	32786	32786	29507	29507	29507	32786	32786	29507
				FEED	66	66	59	59	66	66	59	59	59	66	66	66	59	59	59	131	131	118
				Ap	0.008	0.007	0.006	0.006	0.011	0.011	0.010	0.008	0.008	0.016	0.014	0.014	0.013	0.013	0.011	0.020	0.018	0.016
	39.2		1.0D	Vc	21	21	19	19	26	26	23	23	23	31	31	31	28	28	28	41	41	37
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002
				RPM	32786	32786	29507	29507	27322	27322	24590	24590	24590	24589	24589	24589	22130	22130	22130	26229	26229	23606
				FEED	66	66	59	59	55	55	49	49	49	49	49	49	44	44	44	105	105	94
				Ap	0.008	0.007	0.006	0.006	0.011	0.011	0.010	0.008	0.008	0.016	0.014	0.014	0.013	0.013	0.011	0.020	0.018	0.016
	39.3		1.0D	Vc	21	21	19	19	21	21	19	19	19	26	26	26	23	23	23	31	31	28
				fz	0.009	0.009	0.008	0.008	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.001
				RPM	32786	32786	29507	29507	21858	21858	19672	19672	19672	20491	20491	20491	18442	18442	18442	19672	19672	17705
				FEED	590	590	472	472	44	44	39	39	39	41	41	41	37	37	37	79	79	35
				Ap	0.007	0.006	0.005	0.005	0.009	0.009	0.008	0.007	0.007	0.013	0.012	0.012	0.010	0.010	0.009	0.016	0.015	0.013
	40	Chilled Cast Iron	1.0D	Vc	31	31	28	28	41	41	37	37	37	57	57	57	51	51	51	72	72	65
				fz	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003
				RPM	49178	49178	44260	44260	43714	43714	39343	39343	39343	45081	45081	45081	40573	40573	40573	45900	45900	41310
				FEED	98	98	89	89	175	175	157	157	157	180	180	180	162	162	162	275	275	248
				Ap	0.009	0.008	0.007	0.006	0.011	0.011	0.010	0.009	0.009	0.017	0.015	0.015	0.014	0.014	0.012	0.021	0.019	0.017
	41	Hardened Cast Iron	1.0D	Vc	26	26	23	23	41	41	37	37	37	52	52	52	46	46	46	67	67	60
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003
				RPM	40983	40983	36885	36885	43714	43714	39343	39343	39343	40983	40983	40983	36885	36885	36885	42621	42621	38359
				FEED	82	82	74	74	87	87	79	79	79	164	164	164	148	148	148	256	256	230
				Ap	0.009	0.008	0.007	0.006	0.011	0.011	0.010	0.009	0.009	0.017	0.015	0.015	0.014	0.014	0.012	0.021	0.019	0.017

NEXT PAGE ▶

HPI89 SERIES 2 FLUTE CORNER RADIUS for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

ISO	VDI 3323	Para-meter	Diameter (Ø)																					
			0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.8	0.8	0.8	0.8	0.8	0.9	0.9	1	1	1	1
		L.B.S	4	5	6	2	4	6	8	10	2	4	6	2	4	6	8	12	4	8	4	6	8	10
P	5	Vc	74	74	66	98	88	88	78	59	113	102	102	129	129	116	116	103	144	130	154	139	139	139
		fz	0.004	0.004	0.003	0.005	0.005	0.005	0.004	0.004	0.006	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.010	0.009	0.009	0.009
		RPM	47212	47212	41966	51911	46720	46720	41529	31147	51569	46412	46412	51228	51228	46105	46105	40982	51000	45900	49178	44260	44260	44260
		FEED	378	378	252	519	467	467	332	249	619	464	464	615	615	461	461	410	714	551	984	797	797	797
		Ap	0.020	0.018	0.018	0.027	0.024	0.021	0.018	0.015	0.035	0.028	0.025	0.040	0.036	0.032	0.028	0.024	0.041	0.032	0.045	0.040	0.040	0.035
	8~9	Vc	74	74	66	98	88	88	78	59	113	102	102	129	129	116	116	103	144	130	154	139	139	139
		fz	0.004	0.004	0.003	0.005	0.005	0.005	0.004	0.004	0.006	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.010	0.009	0.009	0.009
		RPM	47212	47212	41966	51911	46720	46720	41529	31147	51569	46412	46412	51228	51228	46105	46105	40982	51000	45900	49178	44260	44260	44260
		FEED	378	378	252	519	467	467	332	249	619	464	464	615	615	461	461	410	714	551	984	797	797	797
		Ap	0.020	0.018	0.018	0.027	0.024	0.021	0.018	0.015	0.035	0.028	0.025	0.040	0.036	0.032	0.028	0.024	0.041	0.032	0.045	0.040	0.040	0.035
	11.1	Vc	74	74	66	98	88	88	78	59	113	102	102	129	129	116	116	103	144	130	154	139	139	139
		fz	0.004	0.004	0.003	0.005	0.005	0.005	0.004	0.004	0.006	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.010	0.009	0.009	0.009
		RPM	47212	47212	41966	51911	46720	46720	41529	31147	51569	46412	46412	51228	51228	46105	46105	40982	51000	45900	49178	44260	44260	44260
		FEED	378	378	252	519	467	467	332	249	619	464	464	615	615	461	461	410	714	551	984	797	797	797
		Ap	0.020	0.018	0.018	0.027	0.024	0.021	0.018	0.015	0.035	0.028	0.025	0.040	0.036	0.032	0.028	0.024	0.041	0.032	0.045	0.040	0.040	0.035
	11.2	Vc	65	65	58	88	79	79	70	53	93	84	84	103	103	93	93	82	113	102	124	111	111	111
		fz	0.003	0.003	0.002	0.004	0.004	0.004	0.003	0.003	0.005	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.008	0.007	0.007	0.007
		RPM	41310	41310	36720	46447	41802	41802	37158	27868	42230	38007	38007	40983	40983	36885	36885	32786	40072	36065	39343	35409	35409	35409
		FEED	248	248	147	372	334	334	223	167	422	380	380	492	492	369	369	328	561	433	629	496	496	496
		Ap	0.017	0.015	0.015	0.023	0.020	0.018	0.015	0.013	0.030	0.024	0.021	0.034	0.031	0.027	0.024	0.020	0.034	0.027	0.038	0.034	0.034	0.030
H	38.1	Vc	65	65	58	88	79	79	70	53	93	84	84	103	103	93	93	82	113	102	124	111	111	111
		fz	0.003	0.003	0.002	0.004	0.004	0.004	0.003	0.003	0.005	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.008	0.007	0.007	0.007
		RPM	41310	41310	36720	46447	41802	41802	37158	27868	42230	38007	38007	40983	40983	36885	36885	32786	40072	36065	39343	35409	35409	35409
		FEED	248	248	147	372	334	334	223	167	422	380	380	492	492	369	369	328	561	433	629	496	496	496
		Ap	0.017	0.015	0.015	0.023	0.020	0.018	0.015	0.013	0.030	0.024	0.021	0.034	0.031	0.027	0.024	0.020	0.034	0.027	0.038	0.034	0.034	0.030
	38.2	Vc	60	60	54	77	70	70	62	46	77	69	69	77	77	70	70	62	82	74	82	74	74	74
		fz	0.003	0.003	0.002	0.004	0.004	0.004	0.003	0.003	0.005	0.004	0.004	0.005	0.005	0.005	0.005	0.004	0.006	0.005	0.007	0.006	0.006	0.006
		RPM	38359	38359	34097	40983	36885	36885	32786	24590	35020	31518	31518	30737	30737	27663	27663	24590	29143	26229	26229	23606	23606	23606
		FEED	230	230	136	328	295	295	197	148	350	252	252	307	307	277	277	197	350	262	367	283	283	283
		Ap	0.017	0.015	0.015	0.023	0.020	0.018	0.015	0.013	0.030	0.024	0.021	0.034	0.031	0.027	0.024	0.020	0.034	0.027	0.038	0.034	0.034	0.030
	39.1	Vc	46	46	41	57	51	51	45	34	62	56	56	67	67	60	60	54	67	60	67	60	60	60
		fz	0.002	0.002	0.002	0.003	0.003	0.003	0.002	0.002	0.004	0.003	0.003	0.004	0.004	0.004	0.004	0.003	0.005	0.005	0.005	0.005	0.005	0.005
		RPM	29507	29507	26229	30053	27048	27048	24042	18032	28335	25502	25502	26639	26639	23975	23975	21311	23679	21311	21311	19180	19180	19180
		FEED	118	118	105	180	162	162	96	72	227	153	153	213	213	192	192	128	237	213	213	192	192	192
		Ap	0.016	0.014	0.014	0.022	0.019	0.017	0.014	0.012	0.028	0.022	0.020	0.032	0.029	0.026	0.022	0.019	0.032	0.025	0.036	0.032	0.032	0.028
	39.2	Vc	37	37	33	46	42	42	37	28	46	42	42	51	51	46	46	41	52	46	51	46	46	46
		fz	0.002	0.002	0.001	0.002	0.002	0.002	0.002	0.001	0.003	0.002	0.002	0.003	0.003	0.003	0.003	0.002	0.004	0.004	0.004	0.004	0.004	0.004
		RPM	23606	23606	20983	24589	22130	22130	19671	14753	21115	19004	19004	20491	20491	18442	18442	16393	18215	16394	16392	14753	14753	14753
		FEED	94	94	42	98	89	89	79	30	127	76	76	123	123	111	111	66	146	131	131	118	118	118
		Ap	0.016	0.014	0.014	0.022	0.019	0.017	0.014	0.012	0.028	0.022	0.020	0.032	0.029	0.026	0.022	0.019	0.032	0.025	0.036	0.032	0.032	0.028
	39.3	Vc	28	28	25	41	37	37	33	25	42	38	38	41	41	37	37	33	41	37	41	37	37	37
		fz	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.001	0.002	0.002	0.002	0.003	0.003	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.003
		RPM	17705	17705	15738	21858	19672	19672	17486	13115	18952	17057	17057	16392	16392	14753	14753	13114	14571	13114	13114	11803	11803	11803
		FEED	35	35	31	87	79	79	70	26	76	68	68	98	98	59	59	52	87	79	79	71	71	71
		Ap	0.013	0.011	0.011	0.018	0.016	0.014	0.012	0.010	0.023	0.018	0.016	0.026	0.023	0.021	0.018	0.016	0.026	0.020	0.029	0.026	0.026	0.023
	40	Vc	65	65	58	88	79	79	70	53	93	84	84	103	103	93	93	82	113	102	124	111	111	111
		fz	0.003	0.003	0.002	0.004	0.004	0.004	0.003	0.003	0.005	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.008	0.007	0.007	0.007
		RPM	41310	41310	36720	46447	41802	41802	37158	27868	42230	38007	38007	40983	40983	36885	36885	32786	40072	36065	39343	35409	35409	35409
		FEED	248	248	147	372	334	334	223	167	422	380	380	492	492	369	369	328	561	433	629	496	496	496
		Ap	0.017	0.015	0.015	0.023	0.020	0.018	0.015	0.013	0.030	0.024	0.021	0.034	0.031	0.027	0.024	0.020	0.034	0.027	0.038	0.034	0.034	0.030
	41	Vc	60	60	54	77	70	70	62	46	77	69	69	77	77	70	70	62	82	74	82	74	74	74
		fz	0.003	0.003	0.002	0.004	0.004	0.004	0.003	0.003	0.005	0.004	0.004	0.005	0.005	0.005	0.005	0.004	0.006	0.005	0.007	0.006	0.006	0.006
		RPM	38359	38359	34097	40983	36885	36885	32786	24590	35020	31518	31518	30737	30737	27663	27663	24590	29143	26229	26229	23606	23606	23606
		FEED	230	230	136	328	295	295	197	148	350	252	252	307	307	277	277	197	350	262	367	283	283	283
		Ap	0.017	0.015	0.015	0.023	0.020	0.018	0.015	0.013	0.030	0.024	0.021	0.034	0.031	0.027	0.024	0.020	0.034	0.027	0.038	0.034	0.034	0.030

NEXT PAGE ▶


HPI89 SERIES 2 FLUTE CORNER RADIUS for RIB PROCESSING



Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

VDI 3323	Para-meter	Diameter (Ø)																						
		1	1	1	1.5	1.5	1.5	1.5	1.5	2	2	2	2	2	2	2	3	3	3	3	3	3
	L.B.S	12	16	20	4	8	12	15	20	6	8	12	16	20	25	30	8	12	16	20	30	35
5	Vc	124	93	93	196	176	176	176	157	216	216	195	195	195	173	173	211	211	190	190	190	169
	fz	0.008	0.007	0.007	0.011	0.010	0.010	0.010	0.009	0.013	0.013	0.012	0.012	0.012	0.010	0.010	0.019	0.019	0.017	0.017	0.017	0.015
	RPM	39342	29507	29507	41581	37423	37423	37423	33265	34426	34426	30983	30983	30983	27541	27541	22404	22404	20164	20164	20164	17923
	FEED	629	413	413	915	748	748	748	599	895	895	744	744	744	551	551	851	851	686	686	686	538
	Ap	0.035	0.030	0.025	0.075	0.060	0.060	0.053	0.045	0.100	0.090	0.080	0.080	0.070	0.070	0.060	0.150	0.135	0.120	0.120	0.105	0.105
8~9	Vc	124	93	93	196	176	176	176	157	216	216	195	195	195	173	173	211	211	190	190	190	169
	fz	0.008	0.007	0.007	0.011	0.010	0.010	0.010	0.009	0.013	0.013	0.012	0.012	0.012	0.010	0.010	0.019	0.019	0.017	0.017	0.017	0.015
	RPM	39342	29507	29507	41581	37423	37423	37423	33265	34426	34426	30983	30983	30983	27541	27541	22404	22404	20164	20164	20164	17923
	FEED	629	413	413	915	748	748	748	599	895	895	744	744	744	551	551	851	851	686	686	686	538
	Ap	0.035	0.030	0.025	0.075	0.060	0.060	0.053	0.045	0.100	0.090	0.080	0.080	0.070	0.070	0.060	0.150	0.135	0.120	0.120	0.105	0.105
11.1	Vc	124	93	93	196	176	176	176	157	216	216	195	195	195	173	173	211	211	190	190	190	169
	fz	0.008	0.007	0.007	0.011	0.010	0.010	0.010	0.009	0.013	0.013	0.012	0.012	0.012	0.010	0.010	0.019	0.019	0.017	0.017	0.017	0.015
	RPM	39342	29507	29507	41581	37423	37423	37423	33265	34426	34426	30983	30983	30983	27541	27541	22404	22404	20164	20164	20164	17923
	FEED	629	413	413	915	748	748	748	599	895	895	744	744	744	551	551	851	851	686	686	686	538
	Ap	0.035	0.030	0.025	0.075	0.060	0.060	0.053	0.045	0.100	0.090	0.080	0.080	0.070	0.070	0.060	0.150	0.135	0.120	0.120	0.105	0.105
11.2	Vc	99	74	74	154	139	139	139	123	170	170	153	153	153	136	136	170	170	153	153	153	136
	fz	0.006	0.006	0.006	0.010	0.009	0.009	0.009	0.008	0.013	0.013	0.012	0.012	0.012	0.010	0.010	0.020	0.020	0.018	0.018	0.018	0.016
	RPM	31474	23606	23606	32754	29479	29479	29479	26203	27049	27049	24344	24344	24344	21639	21639	18032	18032	16229	16229	16229	14426
	FEED	378	283	283	655	531	531	531	419	703	703	584	584	584	433	433	721	721	584	584	584	462
	Ap	0.030	0.026	0.021	0.064	0.051	0.051	0.045	0.038	0.085	0.077	0.068	0.068	0.060	0.060	0.051	0.128	0.115	0.102	0.102	0.089	0.089
38.1	Vc	99	74	74	154	139	139	139	123	170	170	153	153	153	136	136	170	170	153	153	153	136
	fz	0.006	0.006	0.006	0.010	0.009	0.009	0.009	0.008	0.013	0.013	0.012	0.012	0.012	0.010	0.010	0.020	0.020	0.018	0.018	0.018	0.016
	RPM	31474	23606	23606	32754	29479	29479	29479	26203	27049	27049	24344	24344	24344	21639	21639	18032	18032	16229	16229	16229	14426
	FEED	378	283	283	655	531	531	531	419	703	703	584	584	584	433	433	721	721	584	584	584	462
	Ap	0.030	0.026	0.021	0.064	0.051	0.051	0.045	0.038	0.085	0.077	0.068	0.068	0.060	0.060	0.051	0.128	0.115	0.102	0.102	0.089	0.089
38.2	Vc	66	49	49	103	93	93	93	83	113	113	102	102	102	91	91	113	113	102	102	102	91
	fz	0.006	0.005	0.005	0.009	0.008	0.008	0.008	0.007	0.012	0.012	0.011	0.011	0.011	0.010	0.010	0.018	0.018	0.016	0.016	0.016	0.014
	RPM	20983	15737	15737	21939	19745	19745	19745	17551	18032	18032	16229	16229	16229	14426	14426	12021	12021	10819	10819	10819	9617
	FEED	252	157	157	395	316	316	316	246	433	433	357	357	357	289	289	433	433	346	346	346	269
	Ap	0.030	0.026	0.021	0.064	0.051	0.051	0.045	0.038	0.085	0.077	0.068	0.068	0.060	0.060	0.051	0.128	0.115	0.102	0.102	0.089	0.089
39.1	Vc	54	40	40	83	74	74	74	66	93	93	83	83	83	74	74	93	93	83	83	83	74
	fz	0.004	0.004	0.004	0.007	0.006	0.006	0.006	0.005	0.009	0.009	0.008	0.008	0.008	0.007	0.007	0.014	0.014	0.013	0.013	0.013	0.011
	RPM	17049	12787	12787	17510	15759	15759	15759	14008	14754	14754	13279	13279	13279	11803	11803	9835	9835	8852	8852	8852	7868
	FEED	136	102	102	245	189	189	189	140	266	266	212	212	212	165	165	275	275	230	230	230	173
	Ap	0.028	0.024	0.020	0.060	0.048	0.048	0.042	0.036	0.080	0.072	0.064	0.064	0.056	0.056	0.048	0.120	0.108	0.096	0.096	0.084	0.084
39.2	Vc	41	31	31	62	56	56	56	50	72	72	65	65	65	58	58	72	72	65	65	65	58
	fz	0.003	0.003	0.003	0.006	0.005	0.005	0.005	0.004	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.011	0.011	0.010	0.010	0.010	0.009
	RPM	13114	9835	9835	13184	11866	11866	11866	10547	11475	11475	10328	10328	10328	9180	9180	7650	7650	6885	6885	6885	6120
	FEED	79	59	59	158	119	119	119	84	161	161	124	124	124	110	110	168	168	138	138	138	110
	Ap	0.028	0.024	0.020	0.060	0.048	0.048	0.042	0.036	0.080	0.072	0.064	0.064	0.056	0.056	0.048	0.120	0.108	0.096	0.096	0.084	0.084
39.3	Vc	33	25	25	52	47	47	47	42	62	62	56	56	56	49	49	62	62	56	56	56	49
	fz	0.003	0.002	0.002	0.005	0.004	0.004	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.009	0.009	0.008	0.008	0.008	0.007
	RPM	10491	7868	7868	11021	9919	9919	9919	8817	9835	9835	8852	8852	8852	7868	7868	6557	6557	5901	5901	5901	5246
	FEED	63	31	31	110	79	79	79	71	118	118	89	89	89	79	79	118	118	94	94	94	73
	Ap	0.023	0.020	0.016	0.049	0.039	0.039	0.034	0.029	0.065	0.059	0.052	0.052	0.046	0.046	0.039	0.098	0.088	0.078	0.078	0.068	0.068
40	Vc	99	74	74	154	139	139	139	123	170	170	153	153	153	136	136	170	170	153	153	153	136
	fz	0.006	0.006	0.006	0.010	0.009	0.009	0.009	0.008	0.013	0.013	0.012	0.012	0.012	0.010	0.010	0.020	0.020	0.018	0.018	0.018	0.016
	RPM	31474	23606	23606	32754	29479	29479	29479	26203	27049	27049	24344	24344	24344	21639	21639	18032	18032	16229	16229	16229	14426
	FEED	378	283	283	655	531	531	531	419	703	703	584	584	584	433	433	721	721	584	584	584	462
	Ap	0.030	0.026	0.021	0.064	0.051	0.051	0.045	0.038	0.085	0.077	0.068	0.068	0.060	0.060	0.051	0.128	0.115	0.102	0.102	0.089	0.089
41	Vc	66	49	49	103	93	93	93	83	113	113	102	102	102	91	91	113	113	102	102	102	91
	fz	0.006	0.005	0.005	0.009	0.008	0.008	0.008	0.007	0.012	0.012	0.011	0.011	0.011	0.010	0.010	0.018	0.018	0.016	0.016	0.016	0.014
	RPM	20983	15737	15737	21939	19745	19745	19745	17551	18032	18032	16229	16229	16229	14426	14426	12021	12021	10819	10819	10819	9617
	FEED	252	157	157	395	316	316	316	246	433	433	357	357	357	289	289	433	433	346	346	346	269
	Ap	0.030	0.026	0.021	0.064	0.051	0.051	0.045	0.038	0.085	0.077	0.068	0.068	0.060	0.060	0.051	0.128	0.115	0.102	0.102	0.089	0.089

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

ISO	VDI 3323	Material Description	Slotting	Para-meter	Diameter (Ø)																	
					0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.4	0.4	0.4	0.4	0.4	0.4
			Ae	L.B.S	0.5	0.75	1	1.5	2	2.5	3	1	1.5	2	2.5	3	1	1.5	2	2.5	3	3.5
P	5	Non-alloy steel	1.0D	Vc	31	31	31	28	28	25	25	46	46	42	42	42	67	67	67	60	60	60
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002
				RPM	49178	49178	49178	44260	44260	39342	39342	49178	49178	44260	44260	44260	53277	53277	53277	47949	47949	47949
				FEED	98	98	98	89	89	79	79	197	197	177	177	177	213	213	213	192	192	192
				Ap	0.010	0.009	0.009	0.008	0.007	0.007	0.006	0.014	0.014	0.012	0.011	0.011	0.020	0.018	0.018	0.016	0.016	0.014
	8~9	Low alloy steel	1.0D	Vc	31	31	31	28	28	25	25	46	46	42	42	42	67	67	67	60	60	60
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002
				RPM	49178	49178	49178	44260	44260	39342	39342	49178	49178	44260	44260	44260	53277	53277	53277	47949	47949	47949
				FEED	98	98	98	89	89	79	79	197	197	177	177	177	213	213	213	192	192	192
				Ap	0.010	0.009	0.009	0.008	0.007	0.007	0.006	0.014	0.014	0.012	0.011	0.011	0.020	0.018	0.018	0.016	0.016	0.014
	11.1	High alloyed steel, and tool steel	1.0D	Vc	31	31	31	28	28	25	25	46	46	42	42	42	67	67	67	60	60	60
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002
				RPM	49178	49178	49178	44260	44260	39342	39342	49178	49178	44260	44260	44260	53277	53277	53277	47949	47949	47949
				FEED	98	98	98	89	89	79	79	197	197	177	177	177	213	213	213	192	192	192
				Ap	0.010	0.009	0.009	0.008	0.007	0.007	0.006	0.014	0.014	0.012	0.011	0.011	0.020	0.018	0.018	0.016	0.016	0.014
	11.2		1.0D	Vc	31	31	31	28	28	25	25	41	41	37	37	37	57	57	57	51	51	51
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002
				RPM	49178	49178	49178	44260	44260	39342	39342	43714	43714	39343	39343	39343	45081	45081	45081	40573	40573	40573
				FEED	98	98	98	89	89	79	79	175	175	157	157	157	180	180	180	162	162	162
				Ap	0.009	0.008	0.008	0.007	0.006	0.006	0.005	0.011	0.011	0.010	0.009	0.009	0.017	0.015	0.015	0.014	0.014	0.012
H	38.1	Hardened steel	1.0D	Vc	31	31	31	28	28	25	25	41	41	37	37	37	57	57	57	51	51	51
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002
				RPM	49178	49178	49178	44260	44260	39342	39342	43714	43714	39343	39343	39343	45081	45081	45081	40573	40573	40573
				FEED	98	98	98	89	89	79	79	175	175	157	157	157	180	180	180	162	162	162
				Ap	0.009	0.008	0.008	0.007	0.006	0.006	0.005	0.011	0.011	0.010	0.009	0.009	0.017	0.015	0.015	0.014	0.014	0.012
	38.2			Vc	26	26	26	23	23	21	21	41	41	37	37	37	52	52	52	46	46	46
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002
				RPM	40983	40983	40983	36885	36885	32786	32786	43714	43714	39343	39343	39343	40983	40983	40983	36885	36885	36885
				FEED	82	82	82	74	74	66	66	87	87	79	79	79	164	164	164	148	148	148
				Ap	0.009	0.008	0.008	0.007	0.006	0.006	0.005	0.011	0.011	0.010	0.009	0.009	0.017	0.015	0.015	0.014	0.014	0.012
	39.1		1.0D	Vc	21	21	21	19	19	16	16	31	31	28	28	28	41	41	41	37	37	37
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
				RPM	32786	32786	32786	29507	29507	26229	26229	32786	32786	29507	29507	29507	32786	32786	32786	29507	29507	29507
				FEED	66	66	66	59	59	52	52	66	66	59	59	59	66	66	66	59	59	59
				Ap	0.008	0.007	0.007	0.006	0.006	0.006	0.005	0.011	0.011	0.010	0.008	0.008	0.016	0.014	0.014	0.013	0.013	0.011
	39.2			Vc	21	21	21	19	19	16	16	26	26	23	23	23	31	31	31	28	28	28
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
				RPM	32786	32786	32786	29507	29507	26229	26229	27322	27322	24590	24590	24590	24589	24589	24589	22130	22130	22130
				FEED	66	66	66	59	59	52	52	55	55	49	49	49	49	49	49	44	44	44
				Ap	0.008	0.007	0.007	0.006	0.006	0.006	0.005	0.011	0.011	0.010	0.008	0.008	0.016	0.014	0.014	0.013	0.013	0.011
	39.3			Vc	21	21	21	19	19	16	16	21	21	19	19	19	26	26	26	23	23	23
				fz	0.009	0.009	0.009	0.008	0.008	0.007	0.007	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
				RPM	32786	32786	32786	29507	29507	26229	26229	21858	21858	19672	19672	19672	20491	20491	20491	18442	18442	18442
				FEED	590	590	590	472	472	367	367	44	44	39	39	39	41	41	41	37	37	37
				Ap	0.007	0.006	0.006	0.005	0.005	0.005	0.004	0.009	0.009	0.008	0.007	0.007	0.013	0.012	0.012	0.010	0.010	0.009
	40	Chilled Cast Iron	1.0D	Vc	31	31	31	28	28	25	25	41	41	37	37	37	57	57	57	51	51	51
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002
				RPM	49178	49178	49178	44260	44260	39342	39342	43714	43714	39343	39343	39343	45081	45081	45081	40573	40573	40573
				FEED	98	98	98	89	89	79	79	175	175	157	157	157	180	180	180	162	162	162
				Ap	0.009	0.008	0.008	0.007	0.006	0.006	0.005	0.011	0.011	0.010	0.009	0.009	0.017	0.015	0.015	0.014	0.014	0.012
	41	Hardened Cast Iron	1.0D	Vc	26	26	26	23	23	21	21	41	41	37	37	37	52	52	52	46	46	46
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002
				RPM	40983	40983	40983	36885	36885	32786	32786	43714	43714	39343	39343	39343	40983	40983	40983	36885	36885	36885
				FEED	82	82	82	74	74	66	66	87	87	79	79	79	164	164	164	148	148	148
				Ap	0.009	0.008	0.008	0.007	0.006	0.006	0.005	0.011	0.011	0.010	0.009	0.009	0.017	0.015	0.015	0.014	0.014	0.012

NEXT PAGE ▶

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

VDI 3323	Para-meter	Diameter (Ø)																				
		0.4	0.4	0.4	0.4	0.4	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6
	L.B.S	4	5	6	8	10	1	1.5	2	2.5	3	3.5	4	4.5	5	6	7	8	9	10	1.5	2
5	Vc	60	54	54	40	20	82	82	82	82	74	74	74	74	74	66	66	49	49	49	98	98
	fz	0.002	0.002	0.002	0.001	0.001	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.005	0.005
	RPM	47949	42622	42622	31966	15983	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	31475	51911	51911
	FEED	192	170	170	64	32	420	420	420	420	378	378	378	378	378	252	252	189	189	189	519	519
	Ap	0.014	0.014	0.012	0.010	0.008	0.025	0.025	0.023	0.023	0.020	0.020	0.020	0.018	0.018	0.018	0.015	0.015	0.013	0.013	0.030	0.027
8~9	Vc	60	54	54	40	20	82	82	82	82	74	74	74	74	74	66	66	49	49	49	98	98
	fz	0.002	0.002	0.002	0.001	0.001	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.005	0.005
	RPM	47949	42622	42622	31966	15983	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	31475	51911	51911
	FEED	192	170	170	64	32	420	420	420	420	378	378	378	378	378	252	252	189	189	189	519	519
	Ap	0.014	0.014	0.012	0.010	0.008	0.025	0.025	0.023	0.023	0.020	0.020	0.020	0.018	0.018	0.018	0.015	0.015	0.013	0.013	0.030	0.027
11.1	Vc	60	54	54	40	20	82	82	82	82	74	74	74	74	74	66	66	49	49	49	98	98
	fz	0.002	0.002	0.002	0.001	0.001	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.005	0.005
	RPM	47949	42622	42622	31966	15983	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	31475	51911	51911
	FEED	192	170	170	64	32	420	420	420	420	378	378	378	378	378	252	252	189	189	189	519	519
	Ap	0.014	0.014	0.012	0.010	0.008	0.025	0.025	0.023	0.023	0.020	0.020	0.020	0.018	0.018	0.018	0.015	0.015	0.013	0.013	0.030	0.027
11.2	Vc	51	45	45	34	17	72	72	72	72	65	65	65	65	65	58	58	43	43	43	88	88
	fz	0.002	0.002	0.002	0.001	0.001	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.002	0.004	0.004
	RPM	40573	36065	36065	27049	13524	45900	45900	45900	45900	41310	41310	41310	41310	41310	36720	36720	27540	27540	27540	46447	46447
	FEED	162	144	144	54	27	275	275	275	275	248	248	248	248	248	147	147	110	110	110	372	372
	Ap	0.012	0.012	0.010	0.009	0.007	0.021	0.021	0.019	0.019	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.013	0.011	0.011	0.026	0.023
38.1	Vc	51	45	45	34	17	72	72	72	72	65	65	65	65	65	58	58	43	43	43	88	88
	fz	0.002	0.002	0.002	0.001	0.001	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.002	0.004	0.004
	RPM	40573	36065	36065	27049	13524	45900	45900	45900	45900	41310	41310	41310	41310	41310	36720	36720	27540	27540	27540	46447	46447
	FEED	162	144	144	54	27	275	275	275	275	248	248	248	248	248	147	147	110	110	110	372	372
	Ap	0.012	0.012	0.010	0.009	0.007	0.021	0.021	0.019	0.019	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.013	0.011	0.011	0.026	0.023
38.2	Vc	46	41	41	31	15	67	67	67	67	60	60	60	60	60	54	54	40	40	40	77	77
	fz	0.002	0.002	0.002	0.001	0.001	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.002	0.004	0.004
	RPM	36885	32786	32786	24590	12295	42621	42621	42621	42621	38359	38359	38359	38359	38359	34097	34097	25573	25573	25573	40983	40983
	FEED	148	131	131	49	25	256	256	256	256	230	230	230	230	230	136	136	102	102	102	328	328
	Ap	0.012	0.012	0.010	0.009	0.007	0.021	0.021	0.019	0.019	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.013	0.011	0.011	0.026	0.023
39.1	Vc	37	33	33	25	12	52	52	52	52	46	46	46	46	46	41	41	31	31	31	57	57
	fz	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.001	0.001	0.001	0.003	0.003
	RPM	29507	26229	26229	19672	9836	32786	32786	32786	32786	29507	29507	29507	29507	29507	26229	26229	19672	19672	19672	30053	30053
	FEED	59	52	52	39	20	131	131	131	131	118	118	118	118	118	105	105	39	39	39	180	180
	Ap	0.011	0.011	0.010	0.008	0.006	0.020	0.020	0.018	0.018	0.016	0.016	0.016	0.014	0.014	0.014	0.012	0.012	0.010	0.010	0.024	0.022
39.2	Vc	28	25	25	19	9	41	41	41	41	37	37	37	37	37	33	33	25	25	25	46	46
	fz	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.001	0.001	0.001	0.001	0.001	0.002	0.002
	RPM	22130	19671	19671	14753	7377	26229	26229	26229	26229	23606	23606	23606	23606	23606	20983	20983	15737	15737	15737	24589	24589
	FEED	44	39	39	30	15	105	105	105	105	94	94	94	94	94	42	42	31	31	31	98	98
	Ap	0.011	0.011	0.010	0.008	0.006	0.020	0.020	0.018	0.018	0.016	0.016	0.016	0.014	0.014	0.014	0.012	0.012	0.010	0.010	0.024	0.022
39.3	Vc	23	21	21	15	8	31	31	31	31	28	28	28	28	28	25	25	19	19	19	41	41
	fz	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002
	RPM	18442	16393	16393	12295	6147	19672	19672	19672	19672	17705	17705	17705	17705	17705	15738	15738	11803	11803	11803	21858	21858
	FEED	37	33	33	25	12	79	79	79	79	35	35	35	35	35	31	31	24	24	24	87	87
	Ap	0.009	0.009	0.008	0.007	0.005	0.016	0.016	0.015	0.015	0.013	0.013	0.013	0.011	0.011	0.011	0.010	0.010	0.008	0.008	0.020	0.018
40	Vc	51	45	45	34	17	72	72	72	72	65	65	65	65	65	58	58	43	43	43	88	88
	fz	0.002	0.002	0.002	0.001	0.001	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.002	0.004	0.004
	RPM	40573	36065	36065	27049	13524	45900	45900	45900	45900	41310	41310	41310	41310	41310	36720	36720	27540	27540	27540	46447	46447
	FEED	162	144	144	54	27	275	275	275	275	248	248	248	248	248	147	147	110	110	110	372	372
	Ap	0.012	0.012	0.010	0.009	0.007	0.021	0.021	0.019	0.019	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.013	0.011	0.011	0.026	0.023
41	Vc	46	41	41	31	15	67	67	67	67	60	60	60	60	60	54	54	40	40	40	77	77
	fz	0.002	0.002	0.002	0.001	0.001	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.002	0.004	0.004
	RPM	36885	32786	32786	24590	12295	42621	42621	42621	42621	38359	38359	38359	38359	38359	34097	34097	25573	25573	25573	40983	40983
	FEED	148	131	131	49	25	256	256	256	256	230	230	230	230	230	136	136	102	102	102	328	328
	Ap	0.012	0.012	0.010	0.009	0.007	0.021	0.021	0.019	0.019	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.013	0.011	0.011	0.026	0.023

NEXT PAGE ▶

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

ISO	VDI 3323	Para-meter	Diameter (Ø)																			
			0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.8	0.8	0.8	0.8	1	1	1	1
		L.B.S	3	4	5	6	2	4	6	8	10	3	4	5	6	8	10	12	2	3	4	5
P	5	Vc	98	88	88	88	113	102	102	91	91	129	129	116	116	116	103	103	154	154	154	154
		fz	0.005	0.005	0.005	0.005	0.006	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.010	0.010	0.010	0.010
		RPM	51911	46720	46720	46720	51569	46412	46412	41255	41255	51228	51228	46105	46105	46105	40982	40982	49178	49178	49178	49178
		FEED	519	467	467	467	619	464	464	330	330	615	615	461	461	461	410	410	984	984	984	984
		Ap	0.027	0.024	0.021	0.021	0.035	0.028	0.025	0.025	0.021	0.036	0.036	0.032	0.032	0.028	0.028	0.024	0.050	0.050	0.045	0.045
	8~9	Vc	98	88	88	88	113	102	102	91	91	129	129	116	116	116	103	103	154	154	154	154
		fz	0.005	0.005	0.005	0.005	0.006	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.010	0.010	0.010	0.010
		RPM	51911	46720	46720	46720	51569	46412	46412	41255	41255	51228	51228	46105	46105	46105	40982	40982	49178	49178	49178	49178
		FEED	519	467	467	467	619	464	464	330	330	615	615	461	461	461	410	410	984	984	984	984
		Ap	0.027	0.024	0.021	0.021	0.035	0.028	0.025	0.025	0.021	0.036	0.036	0.032	0.032	0.028	0.028	0.024	0.050	0.050	0.045	0.045
	11.1	Vc	98	88	88	88	113	102	102	91	91	129	129	116	116	116	103	103	154	154	154	154
		fz	0.005	0.005	0.005	0.005	0.006	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.010	0.010	0.010	0.010
		RPM	51911	46720	46720	46720	51569	46412	46412	41255	41255	51228	51228	46105	46105	46105	40982	40982	49178	49178	49178	49178
		FEED	519	467	467	467	619	464	464	330	330	615	615	461	461	461	410	410	984	984	984	984
		Ap	0.027	0.024	0.021	0.021	0.035	0.028	0.025	0.025	0.021	0.036	0.036	0.032	0.032	0.028	0.028	0.024	0.050	0.050	0.045	0.045
	11.2	Vc	88	79	79	79	93	84	84	74	74	103	103	93	93	93	82	82	124	124	124	124
		fz	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.008	0.008	0.008	0.008
		RPM	46447	41802	41802	41802	42230	38007	38007	33784	33784	40983	40983	36885	36885	36885	32786	32786	39343	39343	39343	39343
		FEED	372	334	334	334	422	380	380	270	270	492	492	369	369	369	328	328	629	629	629	629
		Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038
H	38.1	Vc	88	79	79	79	93	84	84	74	74	103	103	93	93	93	82	82	124	124	124	124
		fz	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.008	0.008	0.008	0.008
		RPM	46447	41802	41802	41802	42230	38007	38007	33784	33784	40983	40983	36885	36885	36885	32786	32786	39343	39343	39343	39343
		FEED	372	334	334	334	422	380	380	270	270	492	492	369	369	369	328	328	629	629	629	629
		Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038
	38.2	Vc	77	70	70	70	77	69	69	62	62	77	77	70	70	70	62	62	82	82	82	82
		fz	0.004	0.004	0.004	0.004	0.005	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.007	0.007	0.007	0.007
		RPM	40983	36885	36885	36885	35020	31518	31518	28016	28016	30737	30737	27663	27663	27663	24590	24590	26229	26229	26229	26229
		FEED	328	295	295	295	350	252	252	224	224	307	307	277	277	277	197	197	367	367	367	367
		Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038
	39.1	Vc	57	51	51	51	62	56	56	50	50	67	67	60	60	60	54	54	67	67	67	67
		fz	0.003	0.003	0.003	0.003	0.004	0.003	0.003	0.003	0.003	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.005	0.005	0.005	0.005
		RPM	30053	27048	27048	27048	28335	25502	25502	22668	22668	26639	26639	23975	23975	23975	21311	21311	21311	21311	21311	21311
		FEED	180	162	162	162	227	153	153	136	136	213	213	192	192	192	128	128	213	213	213	213
		Ap	0.022	0.019	0.017	0.017	0.028	0.022	0.020	0.020	0.017	0.029	0.029	0.026	0.026	0.022	0.022	0.019	0.040	0.040	0.036	0.036
	39.2	Vc	46	42	42	42	46	42	42	37	37	51	51	46	46	46	41	41	51	51	51	51
		fz	0.002	0.002	0.002	0.002	0.003	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.004	0.004	0.004	0.004
		RPM	24589	22130	22130	22130	21115	19004	19004	16892	16892	20491	20491	18442	18442	18442	16393	16393	16392	16392	16392	16392
		FEED	98	89	89	89	127	76	76	68	68	123	123	111	111	111	66	66	131	131	131	131
		Ap	0.022	0.019	0.017	0.017	0.028	0.022	0.020	0.020	0.017	0.029	0.029	0.026	0.026	0.022	0.022	0.019	0.040	0.040	0.036	0.036
	39.3	Vc	41	37	37	37	42	38	38	33	33	41	41	37	37	37	33	33	41	41	41	41
		fz	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003
		RPM	21858	19672	19672	19672	18952	17057	17057	15162	15162	16392	16392	14753	14753	14753	13114	13114	13114	13114	13114	13114
		FEED	87	79	79	79	76	68	68	61	61	98	98	59	59	59	52	52	79	79	79	79
		Ap	0.018	0.016	0.014	0.014	0.023	0.018	0.016	0.016	0.014	0.023	0.023	0.021	0.021	0.018	0.018	0.016	0.033	0.033	0.029	0.029
	40	Vc	88	79	79	79	93	84	84	74	74	103	103	93	93	93	82	82	124	124	124	124
		fz	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.008	0.008	0.008	0.008
		RPM	46447	41802	41802	41802	42230	38007	38007	33784	33784	40983	40983	36885	36885	36885	32786	32786	39343	39343	39343	39343
		FEED	372	334	334	334	422	380	380	270	270	492	492	369	369	369	328	328	629	629	629	629
		Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038
	41	Vc	77	70	70	70	77	69	69	62	62	77	77	70	70	70	62	62	82	82	82	82
		fz	0.004	0.004	0.004	0.004	0.005	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.007	0.007	0.007	0.007
		RPM	40983	36885	36885	36885	35020	31518	31518	28016	28016	30737	30737	27663	27663	27663	24590	24590	26229	26229	26229	26229
		FEED	328	295	295	295	350	252	252	224	224	307	307	277	277	277	197	197	367	367	367	367
		Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038

NEXT PAGE ▶

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

VDI 3323	Para-meter	Diameter (Ø)																				
		1	1	1	1	1	1	1	1	1	1	1	1.2	1.2	1.2	1.2	1.2	1.4	1.4	1.5	1.5	1.5
	L.B.S	6	7	8	9	10	12	14	16	18	20	22	6	8	10	12	16	6	12	4	6	8
5	Vc	139	139	139	139	139	124	124	93	93	93	46	170	153	153	153	136	185	167	196	196	176
	fz	0.009	0.009	0.009	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.006	0.011	0.009	0.009	0.009	0.008	0.011	0.010	0.011	0.011	0.010
	RPM	44260	44260	44260	44260	44260	39342	39342	29507	29507	29507	14753	45081	40573	40573	40573	36065	42154	37939	41581	41581	37423
	FEED	797	797	797	797	797	629	629	413	413	413	177	992	730	730	730	577	927	759	915	915	748
	Ap	0.040	0.040	0.040	0.035	0.035	0.035	0.030	0.030	0.025	0.025	0.020	0.054	0.048	0.042	0.042	0.036	0.063	0.049	0.075	0.068	0.060
8~9	Vc	139	139	139	139	139	124	124	93	93	93	46	170	153	153	153	136	185	167	196	196	176
	fz	0.009	0.009	0.009	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.006	0.011	0.009	0.009	0.009	0.008	0.011	0.010	0.011	0.011	0.010
	RPM	44260	44260	44260	44260	44260	39342	39342	29507	29507	29507	14753	45081	40573	40573	40573	36065	42154	37939	41581	41581	37423
	FEED	797	797	797	797	797	629	629	413	413	413	177	992	730	730	730	577	927	759	915	915	748
	Ap	0.040	0.040	0.040	0.035	0.035	0.035	0.030	0.030	0.025	0.025	0.020	0.054	0.048	0.042	0.042	0.036	0.063	0.049	0.075	0.068	0.060
11.1	Vc	139	139	139	139	139	124	124	93	93	93	46	170	153	153	153	136	185	167	196	196	176
	fz	0.009	0.009	0.009	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.006	0.011	0.009	0.009	0.009	0.008	0.011	0.010	0.011	0.011	0.010
	RPM	44260	44260	44260	44260	44260	39342	39342	29507	29507	29507	14753	45081	40573	40573	40573	36065	42154	37939	41581	41581	37423
	FEED	797	797	797	797	797	629	629	413	413	413	177	992	730	730	730	577	927	759	915	915	748
	Ap	0.040	0.040	0.040	0.035	0.035	0.035	0.030	0.030	0.025	0.025	0.020	0.054	0.048	0.042	0.042	0.036	0.063	0.049	0.075	0.068	0.060
11.2	Vc	111	111	111	111	111	99	99	74	74	74	37	139	125	125	125	111	144	130	154	154	139
	fz	0.007	0.007	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.005	0.009	0.008	0.008	0.008	0.007	0.010	0.009	0.010	0.010	0.009
	RPM	35409	35409	35409	35409	35409	31474	31474	23606	23606	23606	11803	36884	33196	33196	33196	29507	32786	29507	32754	32754	29479
	FEED	496	496	496	496	496	378	378	283	283	283	118	664	538	538	538	425	662	536	655	655	531
	Ap	0.034	0.034	0.034	0.030	0.030	0.030	0.026	0.026	0.021	0.021	0.017	0.046	0.041	0.036	0.036	0.031	0.054	0.042	0.064	0.057	0.051
38.1	Vc	111	111	111	111	111	99	99	74	74	74	37	139	125	125	125	111	144	130	154	154	139
	fz	0.007	0.007	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.005	0.009	0.008	0.008	0.008	0.007	0.010	0.009	0.010	0.010	0.009
	RPM	35409	35409	35409	35409	35409	31474	31474	23606	23606	23606	11803	36884	33196	33196	33196	29507	32786	29507	32754	32754	29479
	FEED	496	496	496	496	496	378	378	283	283	283	118	664	538	538	538	425	662	536	655	655	531
	Ap	0.034	0.034	0.034	0.030	0.030	0.030	0.026	0.026	0.021	0.021	0.017	0.046	0.041	0.036	0.036	0.031	0.054	0.042	0.064	0.057	0.051
38.2	Vc	74	74	74	74	74	66	66	49	49	49	25	93	83	83	83	74	98	88	103	103	93
	fz	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.005	0.005	0.004	0.008	0.007	0.007	0.007	0.006	0.009	0.008	0.009	0.009	0.008
	RPM	23606	23606	23606	23606	23606	20983	20983	15737	15737	15737	7869	24589	22130	22130	22130	19671	22248	20023	21939	21939	19745
	FEED	283	283	283	283	283	252	252	157	157	157	63	393	310	310	310	236	400	320	395	395	316
	Ap	0.034	0.034	0.034	0.030	0.030	0.030	0.026	0.026	0.021	0.021	0.017	0.046	0.041	0.036	0.036	0.031	0.054	0.042	0.064	0.057	0.051
39.1	Vc	60	60	60	60	60	54	54	40	40	40	20	75	68	68	68	60	77	70	83	83	74
	fz	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.004	0.004	0.004	0.003	0.006	0.005	0.005	0.005	0.005	0.007	0.006	0.007	0.007	0.006
	RPM	19180	19180	19180	19180	19180	17049	17049	12787	12787	12787	6393	19945	17951	17951	17951	15956	17564	15808	17510	17510	15759
	FEED	192	192	192	192	192	136	136	102	102	102	38	239	180	180	180	160	246	190	245	245	189
	Ap	0.032	0.032	0.032	0.028	0.028	0.028	0.024	0.024	0.020	0.020	0.016	0.043	0.038	0.034	0.034	0.029	0.050	0.039	0.060	0.054	0.048
39.2	Vc	46	46	46	46	46	41	41	31	31	31	15	57	51	51	51	45	60	54	62	62	56
	fz	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.002	0.005	0.005	0.005	0.005	0.004	0.005	0.005	0.006	0.006	0.005
	RPM	14753	14753	14753	14753	14753	13114	13114	9835	9835	9835	4918	15027	13524	13524	13524	12022	13583	12225	13184	13184	11866
	FEED	118	118	118	118	118	79	79	59	59	59	20	150	135	135	135	96	136	122	158	158	119
	Ap	0.032	0.032	0.032	0.028	0.028	0.028	0.024	0.024	0.020	0.020	0.016	0.043	0.038	0.034	0.034	0.029	0.050	0.039	0.060	0.054	0.048
39.3	Vc	37	37	37	37	37	33	33	25	25	25	12	46	42	42	42	37	49	44	52	52	47
	fz	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.004	0.004	0.004	0.004	0.003	0.005	0.004	0.005	0.005	0.004
	RPM	11803	11803	11803	11803	11803	10491	10491	7868	7868	7868	3934	12295	11066	11066	11066	9836	11241	10117	11021	11021	9919
	FEED	71	71	71	71	71	63	63	31	31	31	16	98	89	89	89	59	112	81	110	110	79
	Ap	0.026	0.026	0.026	0.023	0.023	0.023	0.020	0.020	0.016	0.016	0.013	0.035	0.031	0.027	0.027	0.023	0.041	0.032	0.049	0.044	0.039
40	Vc	111	111	111	111	111	99	99	74	74	74	37	139	125	125	125	111	144	130	154	154	139
	fz	0.007	0.007	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.005	0.009	0.008	0.008	0.008	0.007	0.010	0.009	0.010	0.010	0.009
	RPM	35409	35409	35409	35409	35409	31474	31474	23606	23606	23606	11803	36884	33196	33196	33196	29507	32786	29507	32754	32754	29479
	FEED	496	496	496	496	496	378	378	283	283	283	118	664	538	538	538	425	662	536	655	655	531
	Ap	0.034	0.034	0.034	0.030	0.030	0.030	0.026	0.026	0.021	0.021	0.017	0.046	0.041	0.036	0.036	0.031	0.054	0.042	0.064	0.057	0.051
41	Vc	74	74	74	74	74	66	66	49	49	49	25	93	83	83	83	74	98	88	103	103	93
	fz	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.005	0.005	0.004	0.008	0.007	0.007	0.007	0.006	0.009	0.008	0.009	0.009	0.008
	RPM	23606	23606	23606	23606	23606	20983	20983	15737	15737	15737	7869	24589	22130	22130	22130	19671	22248	20023	21939	21939	19745
	FEED	283	283	283	283	283	252	252	157	157	157	63	393	310	310	310	236	400	320	395	395	316
	Ap	0.034	0.034	0.034	0.030	0.030	0.030	0.026	0.026	0.021	0.021	0.017	0.046	0.041	0.036	0.036	0.031	0.054	0.042	0.064	0.057	0.051

NEXT PAGE ▶

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

ISO	VDI 3323	Para-meter	Diameter (Ø)																			
			1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.6	1.8	1.8	1.8	1.8	1.8	1.8	1.8	2	2
		L.B.S	10	12	14	16	18	20	25	30	35	6	8	6	8	10	12	14	16	18	4	6
P	5	Vc	176	176	176	157	157	157	118	118	59	201	201	226	226	203	203	203	203	203	216	216
		fz	0.010	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.007	0.012	0.012	0.012	0.012	0.010	0.010	0.010	0.010	0.010	0.013	0.013
		RPM	37423	37423	37423	33265	33265	33265	24949	24949	12474	39958	39958	39958	39958	35962	35962	35962	35962	35962	34426	34426
		FEED	748	748	748	599	599	599	399	399	175	959	959	959	959	719	719	719	719	719	895	895
		Ap	0.060	0.060	0.053	0.053	0.053	0.045	0.038	0.038	0.030	0.072	0.072	0.081	0.081	0.072	0.072	0.072	0.063	0.063	0.100	0.100
	8~9	Vc	176	176	176	157	157	157	118	118	59	201	201	226	226	203	203	203	203	203	216	216
		fz	0.010	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.007	0.012	0.012	0.012	0.012	0.010	0.010	0.010	0.010	0.010	0.013	0.013
		RPM	37423	37423	37423	33265	33265	33265	24949	24949	12474	39958	39958	39958	39958	35962	35962	35962	35962	35962	34426	34426
		FEED	748	748	748	599	599	599	399	399	175	959	959	959	959	719	719	719	719	719	895	895
		Ap	0.060	0.060	0.053	0.053	0.053	0.045	0.038	0.038	0.030	0.072	0.072	0.081	0.081	0.072	0.072	0.072	0.063	0.063	0.100	0.100
	11.1	Vc	176	176	176	157	157	157	118	118	59	201	201	226	226	203	203	203	203	203	216	216
		fz	0.010	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.007	0.012	0.012	0.012	0.012	0.010	0.010	0.010	0.010	0.010	0.013	0.013
		RPM	37423	37423	37423	33265	33265	33265	24949	24949	12474	39958	39958	39958	39958	35962	35962	35962	35962	35962	34426	34426
		FEED	748	748	748	599	599	599	399	399	175	959	959	959	959	719	719	719	719	719	895	895
		Ap	0.060	0.060	0.053	0.053	0.053	0.045	0.038	0.038	0.030	0.072	0.072	0.081	0.081	0.072	0.072	0.072	0.063	0.063	0.100	0.100
	11.2	Vc	139	139	139	123	123	123	93	93	46	161	161	181	181	163	163	163	163	163	170	170
		fz	0.009	0.009	0.009	0.008	0.008	0.008	0.007	0.007	0.006	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.009	0.013	0.013
		RPM	29479	29479	29479	26203	26203	26203	19652	19652	9826	31966	31966	31966	31966	28769	28769	28769	28769	28769	27049	27049
		FEED	531	531	531	419	419	419	275	275	118	639	639	639	639	518	518	518	518	518	703	703
		Ap	0.051	0.051	0.045	0.045	0.045	0.038	0.032	0.032	0.026	0.061	0.061	0.069	0.069	0.061	0.061	0.061	0.054	0.054	0.085	0.085
H	38.1	Vc	139	139	139	123	123	123	93	93	46	161	161	181	181	163	163	163	163	163	170	170
		fz	0.009	0.009	0.009	0.008	0.008	0.008	0.007	0.007	0.006	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.009	0.013	0.013
		RPM	29479	29479	29479	26203	26203	26203	19652	19652	9826	31966	31966	31966	31966	28769	28769	28769	28769	28769	27049	27049
		FEED	531	531	531	419	419	419	275	275	118	639	639	639	639	518	518	518	518	518	703	703
		Ap	0.051	0.051	0.045	0.045	0.045	0.038	0.032	0.032	0.026	0.061	0.061	0.069	0.069	0.061	0.061	0.061	0.054	0.054	0.085	0.085
	38.2	Vc	93	93	93	83	83	83	62	62	31	106	106	119	119	107	107	107	107	107	113	113
		fz	0.008	0.008	0.008	0.007	0.007	0.007	0.006	0.006	0.005	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.009	0.012	0.012
		RPM	19745	19745	19745	17551	17551	17551	13163	13163	6582	21106	21106	21106	21106	18995	18995	18995	18995	18995	18032	18032
		FEED	316	316	316	246	246	246	158	158	66	422	422	422	422	342	342	342	342	342	433	433
		Ap	0.051	0.051	0.045	0.045	0.045	0.038	0.032	0.032	0.026	0.061	0.061	0.069	0.069	0.061	0.061	0.061	0.054	0.054	0.085	0.085
	39.1	Vc	74	74	74	66	66	66	50	50	25	85	85	96	96	87	87	87	87	87	93	93
		fz	0.006	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.004	0.007	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.009	0.009
		RPM	15759	15759	15759	14008	14008	14008	10506	10506	5253	17007	17007	17007	17007	15306	15306	15306	15306	15306	14754	14754
		FEED	189	189	189	140	140	140	105	105	42	238	238	238	238	184	184	184	184	184	266	266
		Ap	0.048	0.048	0.042	0.042	0.042	0.036	0.030	0.030	0.024	0.058	0.058	0.065	0.065	0.058	0.058	0.058	0.050	0.050	0.080	0.080
	39.2	Vc	56	56	56	50	50	50	37	37	19	65	65	73	73	66	66	66	66	66	72	72
		fz	0.005	0.005	0.005	0.004	0.004	0.004	0.004	0.004	0.003	0.006	0.006	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.007	0.007
		RPM	11866	11866	11866	10547	10547	10547	7910	7910	3955	12910	12910	12910	12910	11619	11619	11619	11619	11619	11475	11475
		FEED	119	119	119	84	84	84	63	63	24	155	155	155	155	116	116	116	116	116	161	161
		Ap	0.048	0.048	0.042	0.042	0.042	0.036	0.030	0.030	0.024	0.058	0.058	0.065	0.065	0.058	0.058	0.058	0.050	0.050	0.080	0.080
	39.3	Vc	47	47	47	42	42	42	31	31	16	55	55	61	61	55	55	55	55	55	62	62
		fz	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.005	0.005	0.005	0.005	0.004	0.004	0.004	0.004	0.004	0.006	0.006
		RPM	9919	9919	9919	8817	8817	8817	6613	6613	3306	10860	10860	10860	10860	9774	9774	9774	9774	9774	9835	9835
		FEED	79	79	79	71	71	71	40	40	20	109	109	109	109	78	78	78	78	78	118	118
		Ap	0.039	0.039	0.034	0.034	0.034	0.029	0.024	0.024	0.020	0.047	0.047	0.053	0.053	0.047	0.047	0.047	0.041	0.041	0.065	0.065
	40	Vc	139	139	139	123	123	123	93	93	46	161	161	181	181	163	163	163	163	163	170	170
		fz	0.009	0.009	0.009	0.008	0.008	0.008	0.007	0.007	0.006	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.009	0.013	0.013
		RPM	29479	29479	29479	26203	26203	26203	19652	19652	9826	31966	31966	31966	31966	28769	28769	28769	28769	28769	27049	27049
		FEED	531	531	531	419	419	419	275	275	118	639	639	639	639	518	518	518	518	518	703	703
		Ap	0.051	0.051	0.045	0.045	0.045	0.038	0.032	0.032	0.026	0.061	0.061	0.069	0.069	0.061	0.061	0.061	0.054	0.054	0.085	0.085
	41	Vc	93	93	93	83	83	83	62	62	31	106	106	119	119	107	107	107	107	107	113	113
		fz	0.008	0.008	0.008	0.007	0.007	0.007	0.006	0.006	0.005	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.009	0.012	0.012
		RPM	19745	19745	19745	17551	17551	17551	13163	13163	6582	21106	21106	21106	21106	18995	18995	18995	18995	18995	18032	18032
		FEED	316	316	316	246	246	246	158	158	66	422	422	422	422	342	342	342	342	342	433	433
		Ap	0.051	0.051	0.045	0.045	0.045	0.038	0.032	0.032	0.026	0.061	0.061	0.069	0.069	0.061	0.061	0.061	0.054	0.054	0.085	0.085

NEXT PAGE ▶

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING




Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

VDI 3323	Para-meter	Diameter (Ø)																				
		2	2	2	2	2	2	2	2	2	2	2	2	2.5	2.5	2.5	2.5	2.5	2.5	2.5	3	3
	L.B.S	8	10	12	14	16	18	20	25	30	35	40	50	8	12	16	20	30	40	50	8	12
5	Vc	216	216	195	195	195	195	195	173	173	130	130	65	217	217	195	195	173	130	130	211	211
	fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.016	0.016	0.014	0.014	0.013	0.011	0.011	0.019	0.019
	RPM	34426	34426	30983	30983	30983	30983	30983	27541	27541	20656	20656	10328	27604	27604	24844	24844	22083	16562	16562	22404	22404
	FEED	895	895	744	744	744	744	744	551	551	372	372	165	883	883	696	696	574	364	364	851	851
	Ap	0.090	0.090	0.080	0.080	0.080	0.070	0.070	0.070	0.060	0.050	0.050	0.040	0.113	0.113	0.100	0.100	0.088	0.075	0.063	0.150	0.135
8~9	Vc	216	216	195	195	195	195	195	173	173	130	130	65	217	217	195	195	173	130	130	211	211
	fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.016	0.016	0.014	0.014	0.013	0.011	0.011	0.019	0.019
	RPM	34426	34426	30983	30983	30983	30983	30983	27541	27541	20656	20656	10328	27604	27604	24844	24844	22083	16562	16562	22404	22404
	FEED	895	895	744	744	744	744	744	551	551	372	372	165	883	883	696	696	574	364	364	851	851
	Ap	0.090	0.090	0.080	0.080	0.080	0.070	0.070	0.070	0.060	0.050	0.050	0.040	0.113	0.113	0.100	0.100	0.088	0.075	0.063	0.150	0.135
11.1	Vc	216	216	195	195	195	195	195	173	173	130	130	65	217	217	195	195	173	130	130	211	211
	fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.016	0.016	0.014	0.014	0.013	0.011	0.011	0.019	0.019
	RPM	34426	34426	30983	30983	30983	30983	30983	27541	27541	20656	20656	10328	27604	27604	24844	24844	22083	16562	16562	22404	22404
	FEED	895	895	744	744	744	744	744	551	551	372	372	165	883	883	696	696	574	364	364	851	851
	Ap	0.090	0.090	0.080	0.080	0.080	0.070	0.070	0.070	0.060	0.050	0.050	0.040	0.113	0.113	0.100	0.100	0.088	0.075	0.063	0.150	0.135
11.2	Vc	170	170	153	153	153	153	153	136	136	102	102	51	170	170	153	153	136	102	102	170	170
	fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.017	0.017	0.015	0.015	0.013	0.012	0.012	0.020	0.020
	RPM	27049	27049	24344	24344	24344	24344	24344	21639	21639	16229	16229	8115	21630	21630	19467	19467	17304	12978	12978	18032	18032
	FEED	703	703	584	584	584	584	584	433	433	292	292	130	735	735	584	584	450	311	311	721	721
	Ap	0.077	0.077	0.068	0.068	0.068	0.060	0.060	0.060	0.051	0.043	0.043	0.034	0.096	0.096	0.085	0.085	0.074	0.064	0.053	0.128	0.115
38.1	Vc	170	170	153	153	153	153	153	136	136	102	102	51	170	170	153	153	136	102	102	170	170
	fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.017	0.017	0.015	0.015	0.013	0.012	0.012	0.020	0.020
	RPM	27049	27049	24344	24344	24344	24344	24344	21639	21639	16229	16229	8115	21630	21630	19467	19467	17304	12978	12978	18032	18032
	FEED	703	703	584	584	584	584	584	433	433	292	292	130	735	735	584	584	450	311	311	721	721
	Ap	0.077	0.077	0.068	0.068	0.068	0.060	0.060	0.060	0.051	0.043	0.043	0.034	0.096	0.096	0.085	0.085	0.074	0.064	0.053	0.128	0.115
38.2	Vc	113	113	102	102	102	102	102	91	91	68	68	34	113	113	102	102	91	68	68	113	113
	fz	0.012	0.012	0.011	0.011	0.011	0.011	0.011	0.010	0.010	0.008	0.008	0.007	0.015	0.015	0.014	0.014	0.012	0.011	0.011	0.018	0.018
	RPM	18032	18032	16229	16229	16229	16229	16229	14426	14426	10819	10819	5410	14420	14420	12978	12978	11536	8652	8652	12021	12021
	FEED	433	433	357	357	357	357	357	289	289	173	173	76	433	433	363	363	277	190	190	433	433
	Ap	0.077	0.077	0.068	0.068	0.068	0.060	0.060	0.060	0.051	0.043	0.043	0.034	0.096	0.096	0.085	0.085	0.074	0.064	0.053	0.128	0.115
39.1	Vc	93	93	83	83	83	83	83	74	74	56	56	28	93	93	84	84	74	56	56	93	93
	fz	0.009	0.009	0.008	0.008	0.008	0.008	0.008	0.007	0.007	0.006	0.006	0.005	0.011	0.011	0.010	0.010	0.009	0.008	0.008	0.014	0.014
	RPM	14754	14754	13279	13279	13279	13279	13279	11803	11803	8852	8852	4426	11845	11845	10661	10661	9476	7107	7107	9835	9835
	FEED	266	266	212	212	212	212	212	165	165	106	106	44	261	261	213	213	171	114	114	275	275
	Ap	0.072	0.072	0.064	0.064	0.064	0.056	0.056	0.056	0.048	0.040	0.040	0.032	0.090	0.090	0.080	0.080	0.070	0.060	0.050	0.120	0.108
39.2	Vc	72	72	65	65	65	65	65	58	58	43	43	22	72	72	65	65	58	43	43	72	72
	fz	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.005	0.004	0.009	0.009	0.008	0.008	0.007	0.006	0.006	0.011	0.011
	RPM	11475	11475	10328	10328	10328	10328	10328	9180	9180	6885	6885	3443	9167	9167	8250	8250	7334	5500	5500	7650	7650
	FEED	161	161	124	124	124	124	124	110	110	69	69	28	165	165	132	132	103	66	66	168	168
	Ap	0.072	0.072	0.064	0.064	0.064	0.056	0.056	0.056	0.048	0.040	0.040	0.032	0.090	0.090	0.080	0.080	0.070	0.060	0.050	0.120	0.108
39.3	Vc	62	62	56	56	56	56	56	49	49	37	37	19	62	62	56	56	50	37	37	62	62
	fz	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.004	0.008	0.008	0.007	0.007	0.006	0.005	0.005	0.009	0.009
	RPM	9835	9835	8852	8852	8852	8852	8852	7868	7868	5901	5901	2951	7931	7931	7138	7138	6345	4759	4759	6557	6557
	FEED	118	118	89	89	89	89	89	79	79	47	47	24	127	127	100	100	76	48	48	118	118
	Ap	0.059	0.059	0.052	0.052	0.052	0.046	0.046	0.046	0.039	0.033	0.033	0.026	0.073	0.073	0.065	0.065	0.057	0.049	0.041	0.098	0.088
40	Vc	170	170	153	153	153	153	153	136	136	102	102	51	170	170	153	153	136	102	102	170	170
	fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.017	0.017	0.015	0.015	0.013	0.012	0.012	0.020	0.020
	RPM	27049	27049	24344	24344	24344	24344	24344	21639	21639	16229	16229	8115	21630	21630	19467	19467	17304	12978	12978	18032	18032
	FEED	703	703	584	584	584	584	584	433	433	292	292	130	735	735	584	584	450	311	311	721	721
	Ap	0.077	0.077	0.068	0.068	0.068	0.060	0.060	0.060	0.051	0.043	0.043	0.034	0.096	0.096	0.085	0.085	0.074	0.064	0.053	0.128	0.115
41	Vc	113	113	102	102	102	102	102	91	91	68	68	34	113	113	102	102	91	68	68	113	113
	fz	0.012	0.012	0.011	0.011	0.011	0.011	0.011	0.010	0.010	0.008	0.008	0.007	0.015	0.015	0.014	0.014	0.012	0.011	0.011	0.018	0.018
	RPM	18032	18032	16229	16229	16229	16229	16229	14426	14426	10819	10819	5410	14420	14420	12978	12978	11536	8652	8652	12021	12021
	FEED	433	433	357	357	357	357	357	289	289	173	173	76	433	433	363	363	277	190	190	433	433
	Ap	0.077	0.077	0.068	0.068	0.068	0.060	0.060	0.060	0.051	0.043	0.043	0.034	0.096	0.096	0.085	0.085	0.074	0.064	0.053	0.128	0.115

NEXT PAGE ▶

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING



Vc = m/min. fz = mm/tooth Ap = mm
RPM = rev./min. FEED = mm/min. LBS = Length Below Shank

ISO	VDI 3323	Para-meter	Diameter (Ø)																	
			3	3	3	3	4	4	4	4	4	4	5	5	5	5	6	6	6	6
		L.B.S	16	20	25	30	12	16	20	30	40	50	20	30	40	50	20	30	40	50
P	5	Vc	190	190	190	190	216	216	216	195	195	173	252	227	227	227	252	252	227	227
		fz	0.017	0.017	0.017	0.017	0.026	0.026	0.026	0.023	0.023	0.021	0.032	0.029	0.029	0.029	0.036	0.036	0.032	0.032
		RPM	20164	20164	20164	20164	17212	17212	17212	15491	15491	13770	16065	14459	14459	14459	13388	13388	12049	12049
		FEED	686	686	686	686	895	895	895	713	713	578	1028	839	839	839	964	964	771	771
		Ap	0.120	0.120	0.105	0.105	0.200	0.180	0.180	0.160	0.140	0.140	0.225	0.200	0.200	0.175	0.270	0.270	0.240	0.210
	8~9	Vc	190	190	190	190	216	216	216	195	195	173	252	227	227	227	252	252	227	227
		fz	0.017	0.017	0.017	0.017	0.026	0.026	0.026	0.023	0.023	0.021	0.032	0.029	0.029	0.029	0.036	0.036	0.032	0.032
		RPM	20164	20164	20164	20164	17212	17212	17212	15491	15491	13770	16065	14459	14459	14459	13388	13388	12049	12049
		FEED	686	686	686	686	895	895	895	713	713	578	1028	839	839	839	964	964	771	771
		Ap	0.120	0.120	0.105	0.105	0.200	0.180	0.180	0.160	0.140	0.140	0.225	0.200	0.200	0.175	0.270	0.270	0.240	0.210
	11.1	Vc	190	190	190	190	216	216	216	195	195	173	252	227	227	227	252	252	227	227
		fz	0.017	0.017	0.017	0.017	0.026	0.026	0.026	0.023	0.023	0.021	0.032	0.029	0.029	0.029	0.036	0.036	0.032	0.032
		RPM	20164	20164	20164	20164	17212	17212	17212	15491	15491	13770	16065	14459	14459	14459	13388	13388	12049	12049
		FEED	686	686	686	686	895	895	895	713	713	578	1028	839	839	839	964	964	771	771
		Ap	0.120	0.120	0.105	0.105	0.200	0.180	0.180	0.160	0.140	0.140	0.225	0.200	0.200	0.175	0.270	0.270	0.240	0.210
	11.2	Vc	153	153	153	153	170	170	170	153	153	136	201	181	181	181	201	201	181	181
		fz	0.018	0.018	0.018	0.018	0.027	0.027	0.027	0.024	0.024	0.022	0.032	0.029	0.029	0.029	0.037	0.037	0.033	0.033
		RPM	16229	16229	16229	16229	13524	13524	13524	12172	12172	10819	12786	11507	11507	11507	10655	10655	9590	9590
		FEED	584	584	584	584	730	730	730	584	584	476	818	667	667	667	788	788	633	633
		Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204	0.179
H	38.1	Vc	153	153	153	153	170	170	170	153	153	136	201	181	181	181	201	201	181	181
		fz	0.018	0.018	0.018	0.018	0.027	0.027	0.027	0.024	0.024	0.022	0.032	0.029	0.029	0.029	0.037	0.037	0.033	0.033
		RPM	16229	16229	16229	16229	13524	13524	13524	12172	12172	10819	12786	11507	11507	11507	10655	10655	9590	9590
		FEED	584	584	584	584	730	730	730	584	584	476	818	667	667	667	788	788	633	633
		Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204	0.179
	38.2	Vc	102	102	102	102	113	113	113	102	102	91	134	121	121	121	134	134	121	121
		fz	0.016	0.016	0.016	0.016	0.025	0.025	0.025	0.023	0.023	0.020	0.030	0.027	0.027	0.027	0.035	0.035	0.032	0.032
		RPM	10819	10819	10819	10819	9017	9017	9017	8115	8115	7214	8524	7672	7672	7672	7104	7104	6394	6394
		FEED	346	346	346	346	451	451	451	373	373	289	511	414	414	414	497	497	409	409
		Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204	0.179
	39.1	Vc	83	83	83	83	93	93	93	83	83	74	103	93	93	93	103	103	93	93
		fz	0.013	0.013	0.013	0.013	0.019	0.019	0.019	0.017	0.017	0.015	0.022	0.020	0.020	0.020	0.026	0.026	0.023	0.023
		RPM	8852	8852	8852	8852	7377	7377	7377	6639	6639	5902	6557	5901	5901	5901	5464	5464	4918	4918
		FEED	230	230	230	230	280	280	280	226	226	177	289	236	236	236	284	284	226	226
		Ap	0.096	0.096	0.084	0.084	0.160	0.144	0.144	0.128	0.112	0.112	0.180	0.160	0.160	0.140	0.216	0.216	0.192	0.168
	39.2	Vc	65	65	65	65	72	72	72	65	65	58	82	74	74	74	82	82	74	74
		fz	0.010	0.010	0.010	0.010	0.015	0.015	0.015	0.014	0.014	0.012	0.018	0.016	0.016	0.016	0.021	0.021	0.019	0.019
		RPM	6885	6885	6885	6885	5737	5737	5737	5163	5163	4590	5246	4721	4721	4721	4371	4371	3934	3934
		FEED	138	138	138	138	172	172	172	145	145	110	189	151	151	151	184	184	149	149
		Ap	0.096	0.096	0.084	0.084	0.160	0.144	0.144	0.128	0.112	0.112	0.180	0.160	0.160	0.140	0.216	0.216	0.192	0.168
	39.3	Vc	56	56	56	56	62	62	62	56	56	49	72	65	65	65	72	72	65	65
		fz	0.008	0.008	0.008	0.008	0.012	0.012	0.012	0.011	0.011	0.010	0.015	0.013	0.013	0.013	0.018	0.018	0.016	0.016
		RPM	5901	5901	5901	5901	4918	4918	4918	4426	4426	3934	4590	4131	4131	4131	3825	3825	3443	3443
		FEED	94	94	94	94	118	118	118	97	97	79	138	107	107	107	138	138	110	110
		Ap	0.078	0.078	0.068	0.068	0.130	0.117	0.117	0.104	0.091	0.091	0.146	0.130	0.130	0.114	0.176	0.176	0.156	0.137
	40	Vc	153	153	153	153	170	170	170	153	153	136	201	181	181	181	201	201	181	181
		fz	0.018	0.018	0.018	0.018	0.027	0.027	0.027	0.024	0.024	0.022	0.032	0.029	0.029	0.029	0.037	0.037	0.033	0.033
		RPM	16229	16229	16229	16229	13524	13524	13524	12172	12172	10819	12786	11507	11507	11507	10655	10655	9590	9590
		FEED	584	584	584	584	730	730	730	584	584	476	818	667	667	667	788	788	633	633
		Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204	0.179
	41	Vc	102	102	102	102	113	113	113	102	102	91	134	121	121	121	134	134	121	121
		fz	0.016	0.016	0.016	0.016	0.025	0.025	0.025	0.023	0.023	0.020	0.030	0.027	0.027	0.027	0.035	0.035	0.032	0.032
		RPM	10819	10819	10819	10819	9017	9017	9017	8115	8115	7214	8524	7672	7672	7672	7104	7104	6394	6394
		FEED	346	346	346	346	451	451	451	373	373	289	511	414	414	414	497	497	409	409
		Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204	0.179

HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience.
Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

BELGIUM · FINLAND · ITALY · PORTUGAL · SLOVENIA · THE NETHERLANDS
CROATIA · FRANCE · LITHUANIA · ROMANIA · SPAIN · TÜRKIYE
CZECH REPUBLIC · GERMANY · NORWAY · SWEDEN · UNITED KINGDOM · DENMARK
HUNGARY · POLAND · SERBIA · SWITZERLAND · AUSTRIA · GREECE
ALBANIA · BOSNIA AND HERZEGOVINA · UKRAINE · UZBEKISTAN · BULGARIA
ESTONIA

ASIA PACIFIC

AUSTRALIA · INDONESIA · MALAYSIA · SOUTH KOREA · VIETNAM
CHINA · ISRAEL · PAKISTAN · TAIWAN
HONG KONG · JAPAN · PHILIPPINES · THAILAND
INDIA · SAUDI ARABIA · SINGAPORE · UNITED ARAB EMIRATES

AMERICAS

BRAZIL · CANADA · COLOMBIA · MEXICO · UNITED STATES

AFRICA

EGYPT · SOUTH AFRICA

YG-1 CO., LTD. * For the more information on sales network, please contact the head office as below;

HEAD OFFICE
13-40, Songdogwahak-ro 16beon-gil, Yeonsu-gu, Incheon 21984, South Korea
Phone: +82-32-526-0909
https://www.yg1.kr
E-mail: yg1@yg1.kr

X1-EH

gallastegi, s.l.
Suministros Industriales
www.gallastegi.com 94.622.51.79 mail: gallastegi@gallastegi.com

YG-1 CO., LTD.

HEAD OFFICE
13-40, Songdogwahak-ro 16beon-gil,
Yeonsu-gu, Incheon 21984, South Korea

Phone: +82-32-526-0909
www.yg1.kr
E-mail: yg1@yg1.kr

Note The information is provided for reference only. Tool specifications are subject to change without prior notice.
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.
YG-1 or publishers are not liable for any damage for use of the information.

YouTube
Search 'YG-1' on social media outlets

ISO 9001 / ISO 14001
세계일류상품

YG1YEX1EH2402002