



MACHOS PARA ROSCAR A MÁQUINA

UNJF

- **Ejecución:** HSSE.
Con corte inicial forma C.

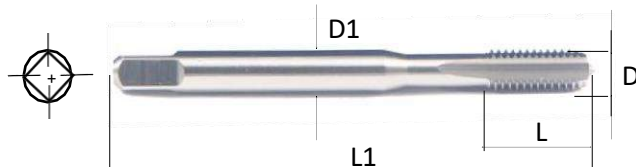

HSSE



C
2-3P

Tol
3B



151975

Unid:mm

CÓDIGO	ROSCA-HILOS	D	D1	L	L1	☐	TALADRADO	
0448	UNJF nº 4-48h	2,84	3,5	11	56	2,7	2,35	*
0544	UNJF nº 5-44h	3,17	3,5	11	56	2,7	2,70	*
0640	UNJF nº 6-40h	3,50	4,0	12	56	3,0	2,95	*
0836	UNJF nº 8-36h	4,17	4,5	13	63	3,4	3,50	*
1032	UNJF nº 10-32h	4,83	6,0	15	70	4,9	4,10	*
1228	UNJF nº 12-28h	5,49	6,0	16	80	4,9	4,60	*
1428	UNJF 1/4-28h	6,35	7,0	17	80	5,5	5,50	*
1624	UNJF 5/16-24h	7,94	8,0	20	90	6,2	6,90	*

151976

1824	UNJF 3/8-24h	9,52	7,0	16	90	5,5	8,50	*
2020	UNJF 7/16-20h	11,11	8,0	22	100	6,2	9,90	*
2220	UNJF 1/2-20h	12,70	9,0	22	100	7,0	11,50	*
2418	UNJF 9/16-18h	14,29	11,0	22	100	9,0	12,90	*
2618	UNJF 5/8-18h	15,87	12,0	22	100	9,0	14,50	*
3016	UNJF 3/4-16h	19,05	14,0	25	110	11,0	17,50	*
3214	UNJF 7/8-14h	22,22	18,0	25	125	14,5	20,40	*
3412	UNJF 1-12h	25,40	18,0	28	140	14,5	23,25	*

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325	HRc30~45	HRc 45 ~55	HRc 55~							

- Consulten plazo de entrega.

◎ : Excelente

○ : Bueno