


TUERCA HEXAGONAL

DIN 934

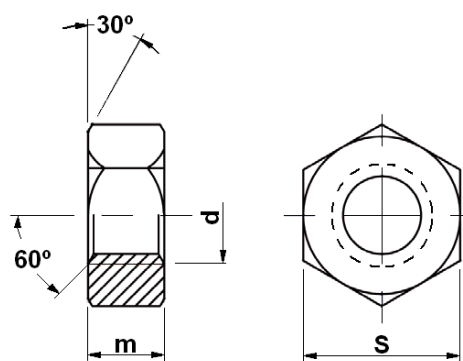


Métrica d	Paso	S	m	DIN 934 SIN BAÑO	DIN 934 ZINCADA	DIN 934.8 PAVONADA	DIN 934.10 PAVONADA
M-3	0,5	5,5	2,4	•	•	•	
M-4	0,7	7	3,2	•	•	•	
M-5	0,8	8	4	•	•	•	•
M-6	1	10	5	•	•	•	•
M-7	1	11	5,5	•			
M-8	1,25	13	6,5	•	•	•	•
M-9				•			
M-10	1,5	17	8	•	•	•	•
M-12	1,75	19	10	•	•	•	•
M-14	2	22	11	•	•	•	•
M-16	2	24	13	•	•	•	•
M-18	2,5	27	15	•	•	•	•
M-20	2,5	30	16	•	•	•	•
M-22	2,5	32	18	•	•	•	•
M-24	3	36	19	•	•	•	•
M-27	3	41	22	•	•	•	•
M-30	3,5	46	24	•	•	•	•
M-33	3,5	50	26	•		□	□
M-36	4	55	29	•		□	□
M-39	4	60	31	•		□	□
M-42	4,5	65	34	•		□	□
M-45	4,5	70	36	•		□	□
M-48	5	75	38	•		□	□
M-52	5	80	42	•		□	□
M-56	5,5	85	45	•		□	□
M-60	5,5	90	48	•		□	□
M-64	6	95	51	□		□	□
M-68	6	100	54	□		□	□
M-72	6	105	58	□		□	□
M-80	6	115	64	□		□	□
M-90	6	130	72	□			□
M-100	6	145	80	□			□

• En stock

□ Consulten plazo de entrega

TUERCA HEXAGONAL

DIN 934 INOXIDABLE AISI-304

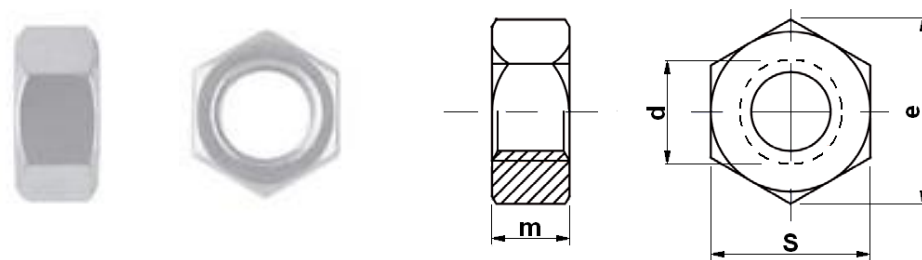


Métrica d	Paso	s	e	m	DIN 934
M-3	0,5	5,5	6,01	2,4	•
M-4	0,7	7	7,66	3,2	•
M-5	0,8	8	8,79	4	•
M-6	1	10	11,05	5	•
M-8	1,25	13	14,38	6,5	•
M-10	1,5	17	18,90	8	•
M-12	1,75	19	21,10	10	•
M-14	2	22	24,49	11	•
M-16	2	24	26,75	13	•
M-18	2,5	27	29,56	15	•
M-20	2,5	30	32,95	16	•
M-22	2,5	32	35,03	18	•
M-24	3	36	39,55	19	•
M-27	3	41	45,20	22	•
M-30	3,5	46	50,85	24	•
M-33	3,5	50	55,37	26	□
M-36	4	55	60,79	29	□
M-39	4	60	66,44	31	□
M-42	4,5	65	72,09	34	□
M-45	4,5	70	76,95	36	□
M-48	5	75	82,60	38	□
M-52	5	80	88,25	42	□

• En stock

□ Consulten plazo de entrega

TUERCA HEXAGONAL

DIN 934

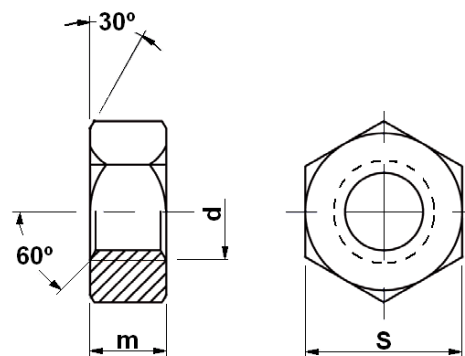

Paso fino	Paso	S	m	DIN 934.8 CAL. 8-PAV	DIN 934.10 CAL. 10-PAV
M-8/100	1	13	6,5	•	□
M-10/100	1	17	8	•	□
M-10/125	1,25	17	8	•	□
M-12/125	1,25	19	10	•	□
M-12/150	1,5	19	10	•	□
M-14/150	1,5	22	11	•	□
M-16/150	1,5	24	11	•	□
M-18/150	1,5	27	15	•	□
M-20/150	1,5	30	16	•	□
M-22/150	1,5	32	18	•	□
M-22/200	2	32	18	•	□
M-24/150	1,5	36	19	•	□
M-24/200	2	36	19	•	□
M-27/200	2	41	22	•	□
M-30/200	2	46	24	•	
M-33/200	2	50	26	•	
M-36/300	3	55	29	•	
M-39/300	3	60	31	•	
M-42/300	3	65	34	•	
M-45/300	3	70	36	•	
M-48/300	3	75	38	•	
M-52/300	3	80	42	□	
M-56/400	4	85	45	□	
M-60/400	4	90	48	□	
M-64/400	4	95	51	□	
M-72/400	4	105	58	□	
M-80/400	4	115	64	□	

Whitworth	Paso	S	m	DIN 934 Sin baño
1/8"	40h			•
5/32"	32h			•
3/16"	24h			•
1/4"	20h	11	5,5	•
5/16"	18h	13	6,5	•
3/8"	16h	14	8	•
7/16"	14h	17	9,5	•
1/2"	12h	19	11	•
9/16"	12h	22	12	•
5/8"	11h	24	13	•
3/4"	10h	28	16	•
7/8"	9h	26	18	•
1"	8h	36	19	•
1" 1/8"	7h	46	22	•
1" 1/4"	7h	50	25	•
1" 3/8"	6h	55	28	•
1" 1/2"	6h	60	30	•
1" 3/4"	5h	70	35	•
2"	4,5h	80	40	•



• En stock

□ Consulten plazo de entrega