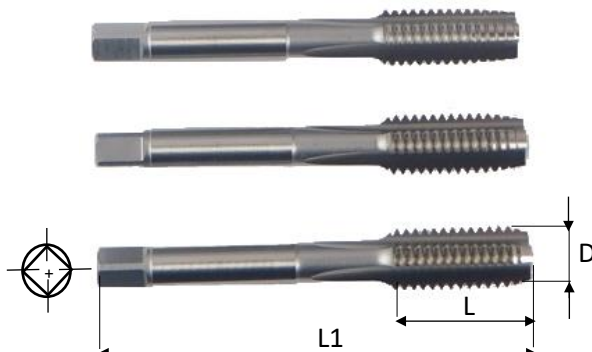


JUEGO DE MACHOS PARA ROSCAR A MANO

BSW



- **Ejecución:** HSS, DIN 351.
- Juego de 3 piezas.
- **Aplicación:** uso general, materiales con dureza hasta 750 N/mm².



151061

Unid:mm

HSS

DIN
351TOL
CLASE 2

CÓDIGO	ROSCA-HILOS	D	L	L1	☑	TALADRADO
0260	W 1/16-60h	1,59	8	32	2,1	1,15
0448	W 3/32-48h	2,38	9	40	2,1	1,80
0640	W 1/8-40h	3,17	14	40	2,7	2,55
0832	W 5/32-32h	3,97	17	45	3,4	3,10
1024	W 3/16-24h	4,76	19	50	4,9	3,60
1224	W 7/32-24h	5,55	19	50	4,9	4,40
1420	W 1/4-20h	6,35	20	50	4,9	5,10
1618	W 5/16-18h	7,94	20	56	4,9	6,50
1816	W 3/8-16h	9,52	22	63	5,5	7,90
2014	W 7/16-14h	11,11	22	70	6,2	9,25
2212	W 1/2-12h	12,70	25	75	7,0	10,50
2412	W 9/16-12h	14,29	26	80	9,0	12,00
2611	W 5/8-11h	15,87	27	80	9,0	13,40
2811	W 11/16-11h	17,46	32	95	11,0	15,25
3010	W 3/4-10h	19,05	32	95	11,0	16,50
3209	W 7/8-9h	22,22	32	100	14,5	19,25
3408	W 1-8h	25,40	36	110	14,5	21,75
3607	W 1.1/8-7h	28,57	40	125	18,0	24,75
3807	W 1.1/4-7h	31,75	40	125	18,0	27,75
4006	W 1.3/8-6h	34,92	50	150	22,0	30,50
4206	W 1.1/2-6h	38,10	50	150	24,0	33,50
4405	W 1.5/8-5h	41,27	56	150	24,0	46,50
4605	W 1.3/4-5h	44,45	58	160	29,0	39,00
4804	W 1.7/8-4,5h	47,62	65	180	29,0	42,00
5004	W 2-4,5h	50,80	65	180	32,0	44,50
5204	W 2.1/4-4h	57,15	85	200	35,0	50,00
5404	W 2.1/2-4h	63,50	85	220	39,0	56,50
5603	W 2.3/4-3,5h	69,85	90	250	44,0	62,00
5803	W 3-3,5h	76,20	90	250	44,0	68,00

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325	HRc30~45	HRc 45 ~55	HRc 55~							

- Consulten plazo de entrega.

◎ : Excelente

○ : Bueno