


BROCA MACHO

M

- **Ejecución:** HSSE, DIN 371 - DIN 376.
- **Aplicación:** en roscas pasantes.
Perforación y roscado en un solo proceso de trabajo.

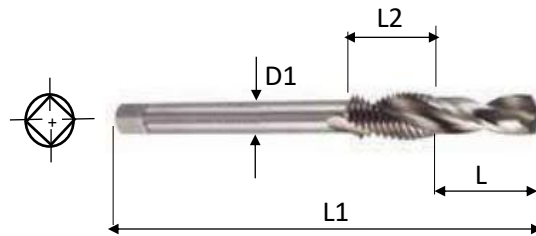


151495

Unid:mm

HSSE

DIN
371-376



Tol
6H



CÓDIGO	ROSCA-PASO	D1	L	L2	L1	☑	BROCA		
0305	M 3 x 0,50	3,5	9,0	12,5	62,0	2,7	2,50	*	
0407	M 4 x 0,70	4,5	10,0	16,0	66,0	3,4	3,30	*	
0508	M 5 x 0,80	6,0	12,5	18,0	75,5	4,9	4,20	*	
0610	M 6 x 1,00	6,0	14,0	20,0	81,0	4,9	5,00	*	
0812	M 8 x 1,25	8,0	20,0	14,0	91,0	6,2	6,75	*	

151496

1015	M 10 x 1,50	7,0	25,0	18,0	105,0	5,5	8,50		*
1217	M 12 x 1,75	9,0	28,0	20,0	118,0	7,0	10,20		*

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325	HRc30~45	HRc 45 ~55	HRc 55~							

- Consulten plazo de entrega.

◎ : Excelente

○ : Bueno