


BROCAS METAL DURO PARA ACERO TEMPLADO

MD

- **Aplicación:** Taladrado de aceros templados (Por debajo de 70 HRc)
- **Ventajas:**
 - Diseño especial
 - Mínima presión de corte por un adelgazamiento especial
 - Buena evacuación de virutas
 - Taladrado potente

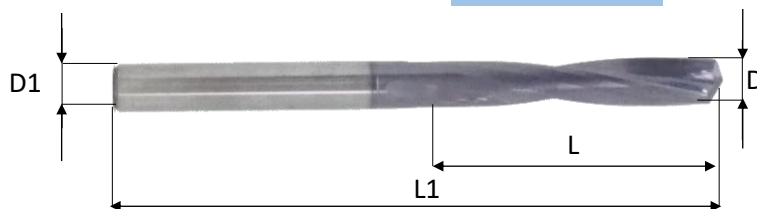

221071

Unid:mm

MD
MGTol. D
h7Tol D₁
h6

TIALN

CÓDIGO	D	D1	L	L1
0300	3,00	3	16	46
0330	3,30	4	18	48
0340	3,40	4	20	50
0350	3,50	4	20	50
0400	4,00	4	22	52
0420	4,20	6	25	65
0430	4,30	6	28	68
0440	4,40	6	28	68
0450	4,50	6	28	68
0500	5,00	6	32	72
0510	5,10	6	32	72
0520	5,20	6	32	72
0550	5,50	6	35	75
0600	6,00	6	35	75
0650	6,50	8	40	80
0680	6,80	8	45	85
0690	6,90	8	45	85

CÓDIGO	D	D1	L	L1
0700	7,00	8	45	85
0750	7,50	8	45	85
0800	8,00	8	50	98
0850	8,50	10	50	98
0860	8,60	10	57	105
0880	8,80	10	57	105
0900	9,00	10	57	105
0950	9,50	10	57	105
1000	10,00	10	63	111
1020	10,20	12	63	111
1030	10,30	12	63	111
1050	10,50	12	63	111
1080	10,80	12	71	119
1100	11,00	12	71	119
1150	11,50	12	71	119
1200	12,00	12	71	119
1400	14,00	14	77	125

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inox	Titanio	Cobre	Bronce	CFRP
~HB225	HB225 ~325	HRc30~45	HRc 45 ~55 ◎	HRc 55~ ◎							

◎ : Excelente

○ : Bueno