


FRESA DE 2 LABIOS PUNTA SEMIESFÉRICA METAL DURO

MD

- Fresa de 2 labios punta semiesférica con corte al centro para inmersión.
- Diseñada para cortar aceros pre-endurecidos, aceros al carbono, aceros aleados, hasta HRC 45.

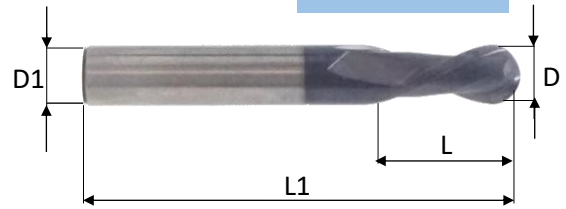

241011

Unid:mm

MD
MG

Z2



Tol. D
+0 -0,03

Tol D₁
h6

TIALN


CÓDIGO	D	D1	L	L1
0100	1,00	3	2	38
0101	1,00	4	3	50
0150	1,50	3	3	38
0151	1,50	4	4	50
0200	2,00	3	4	38
0201	2,00	4	6	50
0250	2,50	3	5	38
0251	2,50	4	8	50
0300	3,00	3	6	38
0301	3,00	4	8	50

CÓDIGO	D	D1	L	L1
0400	4,00	4	10	50
0500	5,00	6	13	50
0600	6,00	6	15	50
0800	8,00	8	20	60
1000	10,00	10	20	75
1200	12,00	12	20	75
1400	14,00	14	25	90
1600	16,00	16	25	100
1800	18,00	18	30	100
2000	20,00	20	30	100

FRESA DE 2 LABIOS PUNTA SEMIESFÉRICA METAL DURO S/LARGA

MD

- Fresa de 2 labios punta semiesférica con corte al centro para inmersión.
- Diseñada para cortar aceros pre-endurecidos, aceros al carbono, aceros aleados, hasta HRC 45.

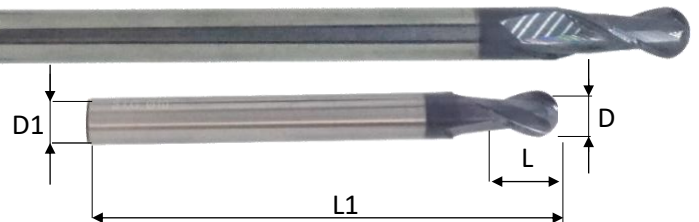

241014

Unid:mm

MD
MG

Z2



Tol D
+0 -0,03

Tol D₁
h6

TIALN

CÓDIGO	D	D1	L	L1
0300	3,00	3	4	60
0400	4,00	4	5	80
0500	5,00	5	6	80
0600	6,00	6	8	80
0800	8,00	8	8	100
1000	10,00	10	15	100
1200	12,00	12	15	100

CÓDIGO	D	D1	L	L1
1600	16,00	16	20	150
2000	20,00	20	25	150

241017

0600	6,00	6	15	150
0800	8,00	8	25	150
1000	10,00	10	25	150
1200	12,00	12	25	150

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inox	Titanio	Cobre	Bronce	CFRP
~HB225 ⊙	HB225 ~325 ⊙	HRC30~45 ⊙	HRC 45 ~55	HRC 55~	○						

⊙ : Excelente

○ : Bueno