


MUELLE CARGA FUERTE

Serie R

ISO 10243

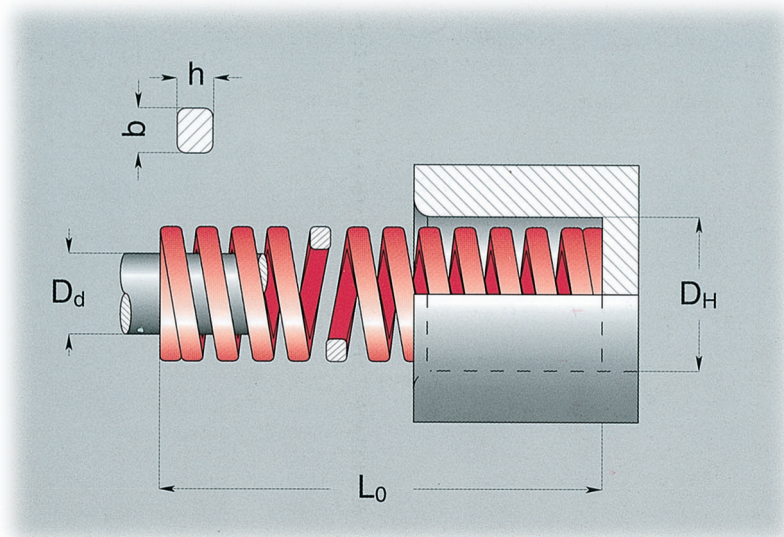

D_H D_d b x h		L ₀	Nº de catálogo	Rigidez	 20% 3.000.000	 25% 1.500.000	 30% Máxima Compresión	 D Aprox.
mm	mm	mm		N / mm	mmN	mmN	mmN	mmN
10	5	25	R 10 - 025	22,1	5,0111	6,3139	7,5166	9,2203
		32	R 10 - 032	17,5	6,4112	8,0140	9,6168	12,1212
		38	R 10 - 038	17,1	7,6130	9,5162	11,4195	13,2226
		44	R 10 - 044	15,0	8,8132	11,0165	13,2198	15,1227
		51	R 10 - 051	12,8	10,2131	12,8164	15,3196	19,5250
		64	R 10 - 064	10,7	12,8137	16,0171	19,2205	21,8233
		76	R 10 - 076	7,5	15,2114	19,0143	22,8171	27,9209
1,9 x 1,5		305	R 10 - 305	2,1	61,0128	76,3160	91,5192	127,2267
12,5	6,3	25	R 13 - 025	42,1	5,0211	6,3265	7,5316	9,8413
		32	R 13 - 032	33,2	6,4212	8,0266	9,6319	13,6452
		38	R 13 - 038	29,3	7,6223	9,5278	11,4334	14,6428
		44	R 13 - 044	24,6	8,8216	11,0271	13,2325	18,1445
		51	R 13 - 051	19,6	10,2200	12,8251	15,3300	22,3437
		64	R 13 - 064	15,0	12,8192	16,0240	19,2288	27,3410
		76	R 13 - 076	13,2	15,2201	19,0251	22,8301	33,1437
		89	R 13 - 089	11,4	17,8203	22,3254	26,7304	38,9443
		102	R 13 - 102	8,4	20,4171	25,5214	30,6257	43,8368
2,4 x 1,9		305	R 13 - 305	2,8	61,0171	76,3214	91,5256	139,7391
16	8	25	R 16 - 025	75,7	5,0379	6,3477	7,5568	8,4636
		32	R 16 - 032	52,8	6,4338	8,0422	9,6507	10,5554
		38	R 16 - 038	48,5	7,6369	9,5461	11,4553	13,6660
		44	R 16 - 044	42,8	8,8377	11,0471	13,2565	15,9681
		51	R 16 - 051	37,1	10,2378	12,8475	15,3568	18,9701
		64	R 16 - 064	30,3	12,8388	16,0485	19,2582	24,9754
		76	R 16 - 076	25,7	15,2391	19,0488	22,8586	29,2750
		89	R 16 - 089	21,7	17,8386	22,3484	26,7579	34,5749
		102	R 16 - 102	19,3	20,4394	25,5492	30,6591	39,1755
		115	R 16 - 115	15,7	23,0361	28,8452	34,5542	44,0691
3,1 x 2,5		305	R 16 - 305	7,1	61,0433	76,3542	91,5650	103,6736
20	10	25	R 20 - 025	216	5,01080	6,31361	7,51620	8,31793
		32	R 20 - 032	168	6,41075	8,01344	9,61613	10,91831
		38	R 20 - 038	129	7,6980	9,51226	11,41471	12,51613
		44	R 20 - 044	112	8,8986	11,01232	13,21478	15,01680
		51	R 20 - 051	94,0	10,2959	12,81203	15,31438	17,61654
		64	R 20 - 064	72,1	12,8923	16,01154	19,21384	22,61629
		76	R 20 - 076	59,7	15,2907	19,01134	22,81361	27,51642
		89	R 20 - 089	50,5	17,8899	22,31126	26,71348	31,71601
		102	R 20 - 102	44,2	20,4902	25,51127	30,61353	37,51658
		115	R 20 - 115	38,4	23,0883	28,81106	34,51325	42,61636
		127	R 20 - 127	34,1	25,4866	31,81084	38,11299	45,51552
		139	R 20 - 139	31,0	28,0868	35,01085	42,01302	50,11553
		152	R 20 - 152	28,2	30,4857	38,01072	45,61286	55,81574
		4,0 x 3,3		305	R 20 - 305	15,0	61,0915	76,31145

Nota: 1 N = 0,102 Kg (fuerza)

D_H D_d b x h		L ₀	Nº de catálogo	Rigidez	 20% 3.000.000	 25% 1.500.000	 30% Máxima Compresión	 D Aprox.						
mm	mm	mm		N / mm	mm	N	mm	N	mm	N				
25	12,5	25	R 25 - 025	375	5,0	1875	6,3	2363	7,5	2813	8,5	3188		
		32	R 25 - 032	297	6,4	1901	8,0	2376	9,6	2851	11,0	3267		
		38	R 25 - 038	219	7,6	1664	9,5	2081	11,4	2497	12,6	2759		
		44	R 25 - 044	187	8,8	1646	11,0	2057	13,2	2468	14,8	2768		
		51	R 25 - 051	156	10,2	1591	12,8	1997	15,3	2387	17,9	2792		
		64	R 25 - 064	123	12,8	1574	16,0	1968	19,2	2362	23,1	2841		
		76	R 25 - 076	99,0	15,2	1505	19,0	1881	22,8	2257	26,3	2604		
		89	R 25 - 089	84,0	17,8	1495	22,3	1873	26,7	2243	30,5	2562		
		102	R 25 - 102	73,0	20,4	1489	25,5	1862	30,6	2234	37,3	2723		
		115	R 25 - 115	65,0	23,0	1495	28,8	1872	34,5	2243	41,9	2724		
		127	R 25 - 127	57,7	25,4	1466	31,8	1835	38,1	2198	46,2	2666		
		139	R 25 - 139	52,7	28,0	1476	35,0	1845	42,0	2213	49,3	2598		
		152	R 25 - 152	47,8	30,4	1453	38,0	1816	45,6	2180	55,7	2662		
		178	R 25 - 178	41,0	35,6	1460	44,5	1825	53,4	2189	65,1	2669		
		203	R 25 - 203	35,8	40,6	1453	50,8	1819	60,9	2180	74,5	2667		
5,5 x 4,2		305	R 25 - 305	22,9	61,0	1397	76,3	1747	91,5	2095	110,2	2524		
32	16	38	R 32 - 038	388	7,6	2949	9,5	3686	11,4	4423	12,5	4850		
		44	R 32 - 044	324	8,8	2851	11,0	3564	13,2	4277	14,9	4828		
		51	R 32 - 051	272	10,2	2774	12,8	3482	15,3	4162	17,8	4842		
		64	R 32 - 064	212	12,8	2714	16,0	3392	19,2	4070	22,4	4749		
		76	R 32 - 076	172	15,2	2614	19,0	3268	22,8	3922	26,1	4489		
		89	R 32 - 089	141	17,8	2510	22,3	3144	26,7	3765	30,8	4343		
		102	R 32 - 102	122	20,4	2489	25,5	3111	30,6	3733	36,8	4490		
		115	R 32 - 115	107	23,0	2461	28,8	3082	34,5	3692	41,4	4430		
		127	R 32 - 127	93,0	25,4	2362	31,8	2957	38,1	3543	44,4	4129		
		139	R 32 - 139	86,0	28,0	2408	35,0	3010	42,0	3612	48,5	4171		
		152	R 32 - 152	78,0	30,4	2371	38,0	2964	45,6	3557	54,8	4274		
		178	R 32 - 178	67,2	35,6	2392	44,5	2990	53,4	3588	63,6	4274		
		203	R 32 - 203	59,1	40,6	2399	50,8	3002	60,9	3599	72,5	4285		
		254	R 32 - 254	46,4	50,8	2357	63,5	2946	76,2	3536	92,8	4306		
		7,1 x 5,4		305	R 32 - 305	38,0	61,0	2318	76,3	2899	91,5	3477	111,8	4248
40	20	51	R 40 - 051	350	10,2	3570	12,8	4480	15,3	5355	17,0	5950		
		64	R 40 - 064	269	12,8	3443	16,0	4304	19,2	5165	21,9	5891		
		76	R 40 - 076	219	15,2	3329	19,0	4161	22,8	4993	26,7	5847		
		89	R 40 - 089	190	17,8	3382	22,3	4237	26,7	5073	31,3	5947		
		102	R 40 - 102	163	20,4	3325	25,5	4157	30,6	4988	37,1	6047		
		115	R 40 - 115	142	23,0	3266	28,8	4090	34,5	4899	41,0	5822		
		127	R 40 - 127	128	25,4	3251	31,8	4070	38,1	4877	46,5	5952		
		139	R 40 - 139	115	28,0	3220	35,0	4025	42,0	4830	53,1	6107		
		152	R 40 - 152	105	30,4	3192	38,0	3990	45,6	4788	56,1	5891		
		178	R 40 - 178	89	35,6	3168	44,5	3961	53,4	4753	67,4	5999		
		203	R 40 - 203	77	40,6	3126	50,8	3912	60,9	4689	76,2	5867		
		254	R 40 - 254	61	50,8	3099	63,5	3874	76,2	4648	96,2	5868		
		8,4 x 6,2		305	R 40 - 305	51	61,0	3111	76,3	3891	91,5	4667	114,8	5855
		50	25	64	R 50 - 064	413	12,8	5286	16,0	6608	19,2	7930	22,4	9251
				76	R 50 - 076	339	15,2	5153	19,0	6441	22,8	7729	26,5	8984
89	R 50 - 089			288	17,8	5126	22,3	6422	26,7	7690	31,5	9072		
102	R 50 - 102			245	20,4	4998	25,5	6248	30,6	7497	37,6	9212		
115	R 50 - 115			215	23,0	4945	28,8	6192	34,5	7418	42,7	9181		
127	R 50 - 127			192	25,4	4877	31,8	6106	38,1	7315	47,5	9120		
139	R 50 - 139			168	28,0	4704	35,0	5880	42,0	7056	51,8	8702		
152	R 50 - 152			154	30,4	4682	38,0	5852	45,6	7022	57,8	8901		
178	R 50 - 178			134	35,6	4770	44,5	5963	53,4	7156	68,5	9179		
203	R 50 - 203			117	40,6	4750	50,8	5944	60,9	7125	77,6	9079		
254	R 50 - 254			89	50,8	4521	63,5	5652	76,2	6782	97,9	8713		
11,1 x 7,6				305	R 50 - 305	73	61,0	4453	76,3	5570	91,5	6680	120,7	8811
63	38			76	R 63 - 076	618	15,2	9394	19,0	11742	22,8	14090	24,7	15265
				89	R 63 - 089	515	17,8	9167	22,3	11485	26,7	13751	30,0	15450
				102	R 63 - 102	438	20,4	8935	25,5	11169	30,6	13403	35,1	15374
		115	R 63 - 115	370	23,0	8510	28,8	10656	34,5	12765	37,5	13875		
		127	R 63 - 127	333	25,4	8458	31,8	10589	38,1	12687	45,9	15285		
		152	R 63 - 152	269	30,4	8178	38,0	10222	45,6	12266	56,5	15199		
		178	R 63 - 178	226	35,6	8046	44,5	10057	53,4	12068	66,8	15097		
		203	R 63 - 203	198	40,6	8039	50,8	10058	60,9	12058	78,8	15602		
		254	R 63 - 254	155	50,8	7874	63,5	9843	76,2	11811	101,7	15763		
		11,6 x 12,3		305	R 63 - 305	128	61,0	7808	76,3	9766	91,5	11712	122,4	15667

Nota: 1 N = 0,102 Kg (fuerza)