



PORTAPUNZÓN PARA PUNZONES CABEZA CILÍNDRICA

HHR (PUNZONES REDONDOS)

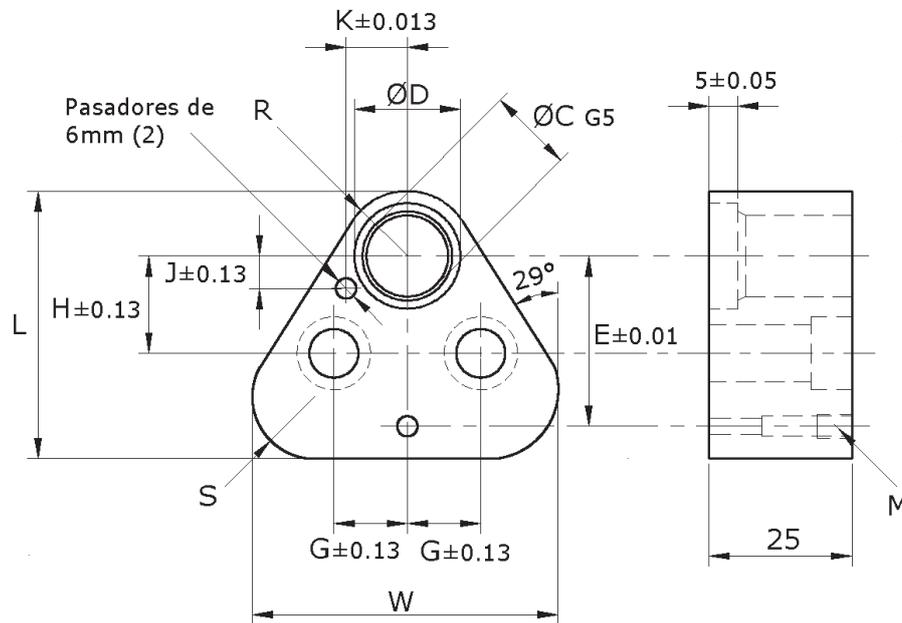

SUFRIDERA

BOP

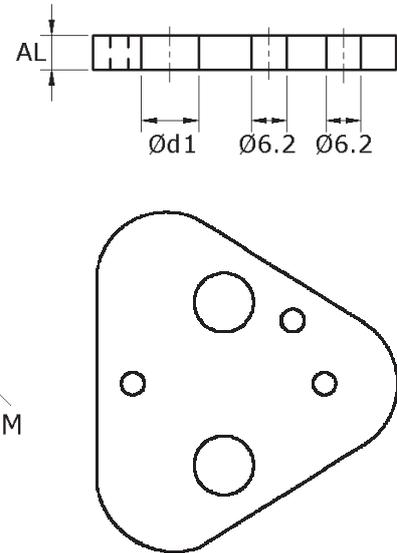

Ref.	C	L	W	D	G	H	R	S	E	K	J	Medida tornillo M
HHR10	10 ^{+0.009} _{-0.0}	44,5	43,7	14,0	11,12	19,0	9,5	12,0	26,925	9,0	7,5	M8
HHR13	13 ^{+0.011} _{-0.0}	50,8	50,0	17,0	14,27	19,0	12,7	15,2	29,970	12,0	6,5	M8
HHR16	16 ^{+0.011} _{-0.0}	54,0	53,2	20,0	15,87	19,0	14,3	16,8	31,750	13,5	6,0	M8
HHR20	20 ^{+0.013} _{-0.0}	60,3	59,6	24,0	17,47	19,0	17,5	20,0	33,530	16,5	5,0	M10
HHR25	25 ^{+0.013} _{-0.0}	69,9	69,1	29,0	19,84	23,8	22,2	24,7	40,640	22,0	7,0	M12
HHR32	32 ^{+0.016} _{-0.0}	69,9	69,1	36,0	19,84	23,8	22,2	24,7	40,640	22,0	7,0	M12


Sufridera	d ₁	AL
		Standard
BOP10	10	5
BOP13	10	5
BOP16	10	5
BOP20	12	5
BOP25	14	5
BOP32	14	5

- Forma de pedido: Portapunzón HHR13

Sufridera BOP13


PORTAPUNZÓN PARA PUNZONES CABEZA CILÍNDRICA

HHS (PUNZONES CON ANTIGIRO)

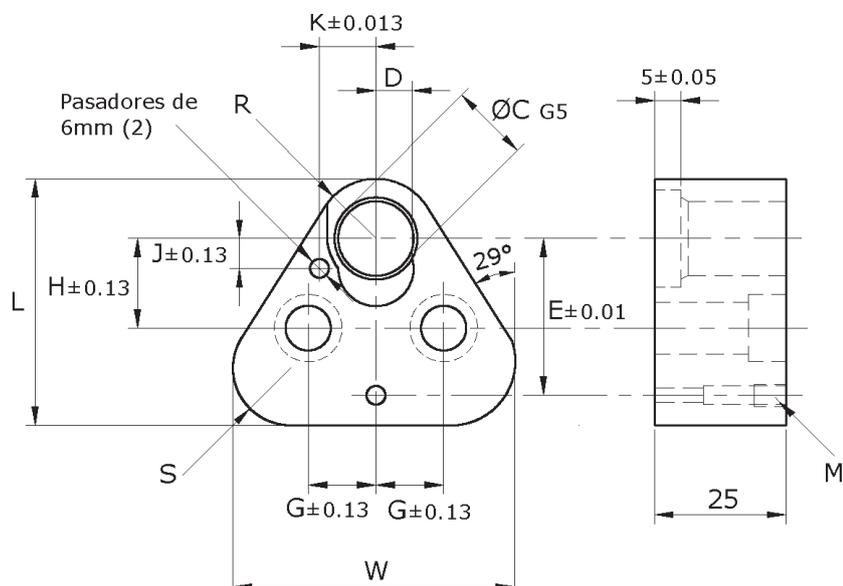

SUFRIDERA

BOP

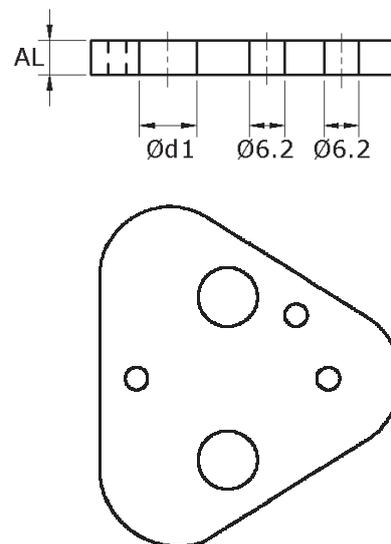


Ref.	C	L	W	D	G	H	R	S	E	K	J	Medida tornillo M
HHS10	10 ^{+0.009} _{-0.0}	44,5	43,7	5,0	11,12	19,0	9,5	12,0	26,925	9,0	7,5	M8
HHS13	13 ^{+0.011} _{-0.0}	50,8	50,0	6,5	14,27	19,0	12,7	15,2	29,970	12,0	6,5	M8
HHS16	16 ^{+0.011} _{-0.0}	54,0	53,2	8,0	15,87	19,0	14,3	16,8	31,750	13,5	6,0	M8
HHS20	20 ^{+0.013} _{-0.0}	60,3	59,6	10,0	17,47	19,0	17,5	20,0	33,530	16,5	5,0	M10
HHS25	25 ^{+0.013} _{-0.0}	69,9	69,1	12,5	19,84	23,8	22,2	24,7	40,640	22,0	7,0	M12
HHS32	32 ^{+0.016} _{-0.0}	69,9	69,1	16,0	19,84	23,8	22,2	24,7	40,640	22,0	7,0	M12

Sufridera	d ₁	AL
		Standard
BOP10	10	5
BOP13	10	5
BOP16	10	5
BOP20	12	5
BOP25	14	5
BOP32	14	5

- Forma de pedido: Portapunzón HHS13

Sufridera BOP13

PORTAPUNZÓN DE CAMBIO RÁPIDO

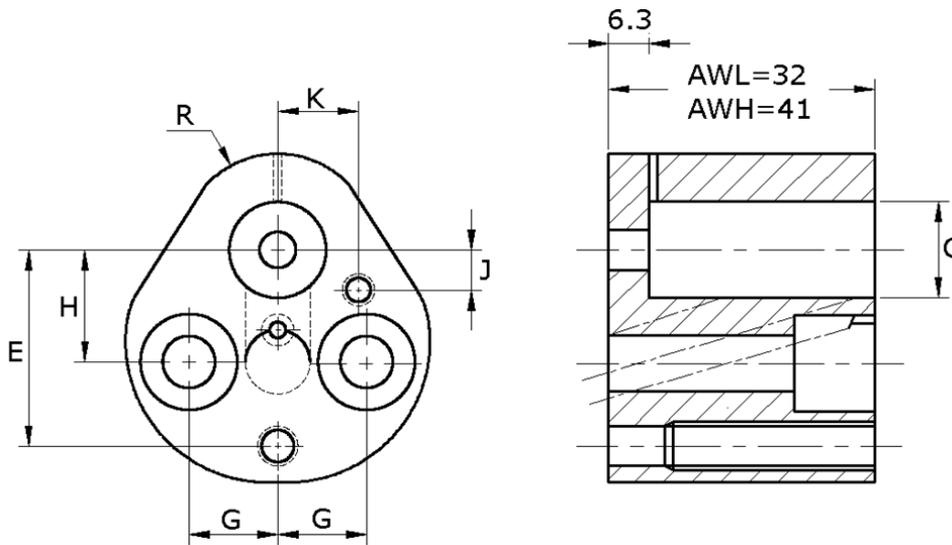

CARGA LIGERA AWL

Ref.	C	E	G	R	H	J	K	Medida de tornillo
AWL 6	6	23,000	11,10	8,0	19,00	9,00	8,00	M6
AWL 10	10	26,924	11,12	9,5	19,05	7,50	9,00	M8
AWL 13	13	29,972	14,27	12,7	19,05	6,50	12,00	M8
AWL 16	16	31,750	15,87	14,3	19,05	6,00	13,50	M8
AWL 20	20	33,528	17,47	17,5	19,05	5,00	16,50	M10
AWL 25	25	40,640	19,84	22,2	23,82	7,00	22,00	M12
AWL 32	32	40,640	19,84	22,2	23,82	7,00	22,00	M12

- Forma de pedido: Portapunzón AWL 10

CARGA FUERTE AWH

Ref.	C	E	G	R	H	J	K	Medida de tornillo
AWH 10	10	26,924	11,12	9,5	19,05	7,50	9,00	M8
AWH 13	13	29,972	14,27	12,7	19,05	6,50	12,00	M8
AWH 16	16	31,750	15,87	14,3	19,05	6,00	13,50	M8
AWH 20	20	33,528	17,47	17,5	19,05	5,00	16,50	M10
AWH 25	25	40,640	19,84	22,2	23,82	7,00	22,00	M12
AWH 32	32	40,640	19,84	22,2	23,82	7,00	22,00	M12
AWH 40	40	43,993	24,00	26,0	27,00	10,00	26,00	M12

- Forma de pedido: Portapunzón AWH 13