


MACHOS PARA ROSCAR A MÁQUINA AGUJEROS PASANTES

UNEF

- Ejecución: HSSE, DIN 374, con corte inicial forma B.

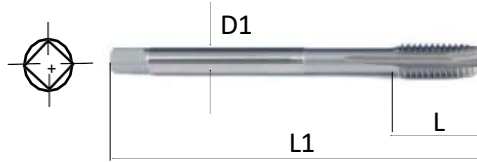


DIN 374

151933

Unid:mm

HSSE

DIN
374



B
4-5P

Tol
2B




CÓDIGO	ROSCA-HILOS	D1	L	L1	☑	TALADRADO	
1432	UNEF 1/4-32h	7,0	16	82	5,4	5,55	*
1632	UNEF 5/16-32h	8,4	21	85	6,1	7,15	*
1832	UNEF 3/8-32h	7,0	22	95	5,4	8,70	*
2028	UNEF 7/16-28h	8,0	22	100	6,2	10,20	*
2228	UNEF 1/2-28h	9,0	22	100	7,0	11,80	*
2424	UNEF 9/16-24h	12,0	24	100	9,0	13,20	*
2624	UNEF 5/8-24h	12,0	24	100	9,0	14,80	*
3020	UNEF 3/4-20h	14,0	27	110	11,0	17,80	*
3220	UNEF 7/8-20h	18,0	26	125	14,5	20,95	*
3420	UNEF 1-20h	18,0	28	140	14,5	24,20	*

MACHOS PARA ROSCAR A MÁQUINA AGUJEROS CIEGOS

UNEF

- Ejecución: HSSE, DIN 374, con corte inicial forma C, hélice 35°.

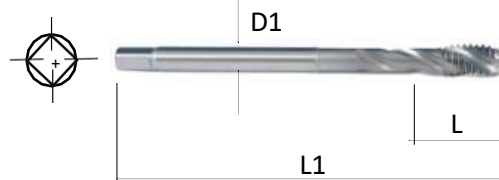


DIN 374

151934

Unid:mm

HSSE

DIN
374



C
2-3P

Tol
2B



CÓDIGO	ROSCA-HILOS	D1	L	L1	☑	TALADRADO	
1432	UNEF 1/4-32h	7,0	16	82	5,4	5,55	*
1632	UNEF 5/16-32h	8,4	21	85	6,1	7,15	*
1832	UNEF 3/8-32h	7,0	22	95	5,4	8,70	*
2028	UNEF 7/16-28h	8,0	22	100	6,2	10,20	*
2228	UNEF 1/2-28h	9,0	22	100	7,0	11,80	*
2424	UNEF 9/16-24h	12,0	24	100	9,0	13,20	*
2624	UNEF 5/8-24h	12,0	24	100	9,0	14,80	*
3020	UNEF 3/4-20h	14,0	27	110	11,0	17,80	*
3220	UNEF 7/8-20h	18,0	26	125	14,5	20,95	*
3420	UNEF 1-20h	18,0	28	140	14,5	24,20	*

Aceros Carbono	Aceros Aleados	Aceros Preendurecidos	Aceros Endurecidos		Fundición	Aluminio	Inoxidable	Titanio	Cobre	Bronce	CFRP
~HB225 ◎	HB225 ~325	HRC30~45	HRC 45 ~55	HRC 55~							

- Consulten plazo de entrega.

◎ : Excelente

○ : Bueno