


TORNILLO CABEZA AVELLANADA "ALLEN"

DIN 7991 CALIDAD 10.9

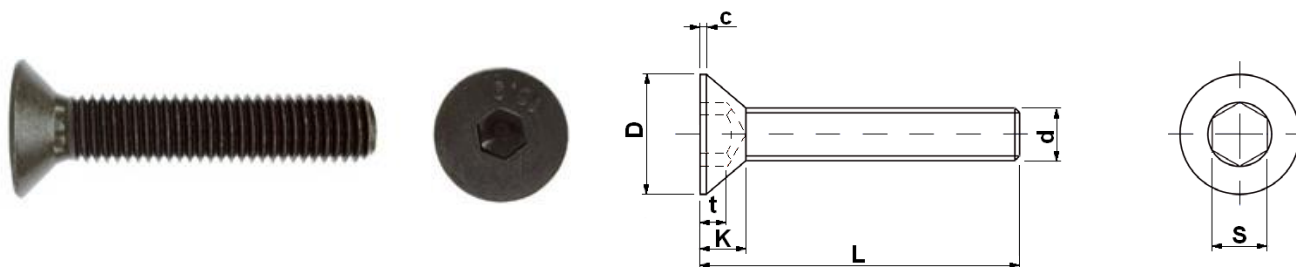

Métrica d	M-3	M-4	M-5	M-6	M-8	M-10	M-12	M-14	M-16	M-18	M-20	M-24
Paso	0,5	0,7	0,8	1	1,25	1,5	1,75	2	2	2,5	2,5	3
D	6	8	10	12	16	20	24	27	30	33	36	39
K	1,7	2,3	2,8	3,3	4,4	5,5	6,5	7	7,5	8	8,5	14
S	2	2,5	3	4	5	6	8	10	10	12	12	14
t	1,2	1,8	2,3	2,5	3,5	4,4	4,6	4,8	5,3	5,6	5,9	10,3



L												
6	•	•	•									
8	•	•	•	•								
10	•	•	•	•	•							
12	□	□	□	□	□	□						
14	□	□	□	□	□	□						
16	•	•	•	•	•	•	•					
18	□	□	□	□	□	□	□					
20	•	•	•	•	•	•	•					
25	•	•	•	•	•	•	•	•	•			
30	•	•	•	•	•	•	•	•	•			
35	•	•	•	•	•	•	•	•	•			
40	•	•	•	•	•	•	•	•	•		□	
45		•	•	•	•	•	•	•	•		□	
50		•	•	•	•	•	•	•	•	□	□	□
55		□	□	□	□	□	□	□	□		□	
60		□	□	•	•	•	•	•	•			□
65							•					
70			□	□	□	□	□	□	□	□	□	□
80				□	□	□	□	□	□	□	□	□
90				□	□	□	□	□	□	□	□	□
100				□	□	□	□	□	□	□	□	□
110					□	□	□		□		□	□
120					□	□	□		□		□	□
130									□		□	□
140									□		□	□
150									□		□	□
160												□

• En stock

□ Consulten plazo de entrega

TORNILLO CABEZA AVELLANADA "ALLEN"

DIN 7991 INOXIDABLE AISI-304

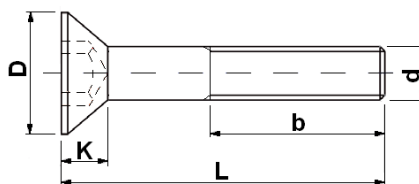

Métrica d	M-3	M-4	M-5	M-6	M-8	M-10	M-12	M-16	M-20
Paso	0,5	0,7	0,8	1	1,25	1,5	1,75	2	2,5
D	6	8	10	12	16	20	24	30	36
e	2,3	2,9	3,5	4,7	5,8	7	9,4	11,6	13,8
K	1,7	2,3	2,8	3,3	4,4	5,5	6,5	7,5	8,5
S	2	2,5	3	4	5	6	8	10	12
b) L ≤ 125	12	14	16	18	22	26	30	38	46
b) 125 < L ≤ 200				24	28	32	36	44	52

L									
6	•	•							
8	•	•	•	•					
10	•	•	•	•	•				
12	□	□	□	□	□				
14	□	□	□	□	□				
16	•	•	•	•	•	•			
18	□	□	□	□	□	□			
20	•	•	•	•	•	•	•		
25	□	•	•	•	•	•	•		
30	□	□	•	•	•	•	•	□	□
35		□	□	•	•	•	•	□	□
40	□	□	□	•	•	•	•	□	□
45			□	□	•	•	•	□	□
50		□	□	□	•	•	•	□	□
55				□	□	□	□	□	□
60			□	□	□	□	□	□	□
65				□	□	□	□	□	□
70			□	□	□	□	□	□	□
80				□	□	□	□	□	□
90				□	□	□	□	□	□
100				□	□	□	□	□	□
110					□	□	□	□	□
120					□	□	□	□	□
130								□	□
140								□	□

• En stock

□ Consulten plazo de entrega